

BID DOCUMENTS AND SPECIFICATIONS FOR:

Arlington Gateways
Arlington, Massachusetts

Bid # 16-42-1

OCTOBER 2016

Prepared for:

Department of Planning and
Community Development
Town of Arlington, Massachusetts

Prepared by:

Esker Company Landscape Architects 23
Ridge Road, Lexington, MA 02420

SEALED BIDS will be received:

Date: October 27, 2016

Time: 10:00 AM

Place: Office of the Purchasing Agent

730 Massachusetts Avenue

Arlington, MA 02476

TABLE OF CONTENTS

BIDDING AND CONTRACT REQUIREMENTS

Invitation to Bid
Instructions to Bidders
Bid Form

Form A - CERTIFICATE OF NON-COLLUSION
Form B - CERTIFICATE OF FOREIGN CORPORATION
Form C - BIDDER CERTIFICATION REGARDING PAYMENT OF PREVAILING
WAGES
Form D - CERTIFICATE OF PAYMENT OF STATE TAXES

Wage Rates

SECTION 101426: POST AND PANEL SIGN

SECTION 321400: GRANITE PAVER BANDS

SECTION 321401: STEEL EDGE RESTRAINT

SECTION 329200: TURF AND GRASSES

SECTION 329300: PLANTS

GATEWAY 1: MYSTIC STREET AT OLD MYSTIC STREET

GATEWAY 2: RIVER STREET AT MYSTIC VALLEY PARKWAY

GATEWAY 3: PLEASANT STREET AT ROUTE 2

ARLINGTON WELCOME SIGN: SITE DETAILS

PLANTING DETAILS

END OF SECTION

**TOWN OF ARLINGTON
MASSACHUSETTS**

INVITATION TO BID

BID No. 16-42-1 ARLINGTON GATEWAYS

Sealed bids for Arlington Gateways for the Town of Arlington, Massachusetts, will be received at the Purchasing Department, 730 Massachusetts Avenue, Arlington, MA 02476 until **10:00 AM prevailing time, on October 27, 2016** at which time and place said bids will be publicly opened and read aloud.

All bids must be in a sealed envelope plainly marked: **BID No. 16-42-1 ARLINGTON GATEWAYS.**

The scope of work of the Base Bid includes improvements to Gateway 3. The project includes post and panel sign fabrication and installation, plantings, and granite paver installation. Add Alternate #1 for improvements to Gateway 2, including post and panel sign fabrication and installation and plantings. Add Alternate #2 for improvements to Gateway 1, including post and panel sign fabrication and installation, plantings, and granite paver and steel edge restraint installation.

Bid Security in the form of a bid bond, cash, certified check, treasurer's or cashier's check payable to the Owner, is required in the amount of five percent of the bid, in accordance with Section 00200, INSTRUCTIONS TO BIDDERS.

The contract duration for the Base Bid is 150 consecutive days.

Copies may be obtained at the Office of the Purchasing Agent, located at 730 Massachusetts Avenue, Arlington, Massachusetts 02476, from 9 a.m. to 12 noon and 1 to 4 p.m.

Contract Documents and plans will not be mailed.

Contract Documents and plans are available for down load and review on the Town Website:

www.arlingtonma.gov/purchasing

The selected contractor shall furnish a performance bond and a payment bond in amount at least equal to one hundred percent (100%) of the contract price as stipulated in Section 00700 GENERAL CONDITIONS of these specifications.

Minimum Wage Rates as determined by the Commissioner of the Division of Occupational Safety of the Executive Office of Labor and Workforce Development under the provisions of the Massachusetts General Laws Chapter 149, Section 26 to 27D, as amended, apply to this project. It is the responsibility of the Bidder, before bid opening, to request if necessary, any additional information on Minimum Wage Rates for those trades people who may be employed for the proposed work under this contract.

All bids for this project are subject to applicable bidding laws of Massachusetts, including General Laws Chapter 30, Section 39M as amended.

The Bidder agrees that this bid shall be good and may not be withdrawn for a period of 30 working days, Saturdays, Sundays and legal holidays excluded after the opening of bids.

The Owner reserves the right to waive any informalities or to reject any or all bids.

TOWN OF ARLINGTON

Adam W. Chapdelaine
Town Manager

INSTRUCTIONS TO BIDDERS

- I. COMPLEMENTARY DOCUMENT
 - A. INVITATION TO BID, including herewith, is complementary to this document and shall be reviewed by bidder for specific instruction which are not repeated herein.

2. STATUTES REGUALTING COMPETITIVE BIDDING
 - A. Bidding procedures and award of general contract and subcontracts shall be in accordance with the provisions of Chapter 30, Section 39M and Chapter 149, Section 44A through 44L inclusive, of the General Laws of the Commonwealth of Massachusetts, including all current amendments.
 - B. In the event of any discrepancy or inconsistency between the provisions of these Bid and Contract Documents and the above-mentioned statutes, the provisions of the above-mentioned statutes shall govern. In such event, the application of all remaining provisions not in conflict to any circumstance other than that in which the conflict occurs shall not be affected thereby.

3. BIDDER'S QUALIFICATIONS
 - A. DCPO Certification not required.
 - B. The Contractors' Update Statements are not public records and will not be open to public inspection.

4. INTERPRETATION OF DOCUMENTS: NOTIFICATION OF ERRORS
 - A. Interpretations of the provisions of the Bid and Contract Documents will be made by the designer upon written request of any general bidder or sub-bidder, provided that such request is received by the Designer at least seven (7) days prior to the date of the applicable bid opening, and that the Designer considers such interpretation to be of sufficient importance. Oral or telephone interpretations will not generally be made, and if made shall be strictly informal and not legally valid or binding.
 - B. Such written interpretations shall be in the form of Addenda to the Bid and Contract Documents.
 - C. Bidders are urged to communicate all errors and discrepancies found in the Bid and Contract Documents to the Designer. Telephone calls pointing out any such errors or discrepancies will be taken by the Designer, but only for the purpose of receiving the information in order that it may be properly processed, and not for interpretation or clarification.

5. EXAMINATION OF BIDDING AND CONTRACT DOCUMENTS
 - A. Each Bidder shall carefully examine the Bid and Contract Documents to obtain a thorough understanding of the work of his bid in addition to the work of related trades. In addition, each General Bidder shall personally visit the

site to thoroughly acquaint himself/herself with the conditions as they exist hereon.

- B. Failure of any Bidder to thoroughly examine the Bid and Contract Documents or to visit and examine the site shall in no way relieve him/her of any obligation with respect to his/her bid or of any responsibility assigned to him under the Contract.

6. PRE-BID CONFERENCE

- A. N/A

7. MODIFICATION AND WITHDRAWAL OF BIDS

- A. Modification of withdrawal of Bids will be permitted after the submission of such bids provided clearly written, readily understandable instructions for same are received by the Owner in writing prior to the time established for opening of such bids. No Bid may be withdrawn after that time, except as otherwise provided herein or by law.

8. ADDENDA

- A. Addenda may be required during the bidding period to modify, clarify or interpret the Bid and Contract Documents. It is intended, but not guaranteed, that such Addenda shall be mailed by the Owner to all persons or parties to whom Bid and Contract Documents have been issued (Bidders of Record). Failure to receive such Addenda shall in no way relieve any bidder from the execution of its provisions. All bidders are cautioned to verify the number of Addenda which have been issued and to secure any needed copies from the Designer before submitting a Bid.

9. FORM FOR BIDS

- A. The Owner will make available, to every person applying therefor, a Bid Form. Each bona fide Bidder will be furnished forms for his proposal upon request. Such forms will be made available at the Owner's office during the regular office hours throughout the bidding period. Bids must be submitted on the forms provided by Owner or of forms included in the bid documents of the Project Manual.
- B. All blank spaces provided on the bid forms shall be filled in with ink or typewriter. Where space is provided, sums shall be expressed in both words and figures. In case of a discrepancy between the two, the written words shall govern.
- C. No interlineations, additional, alterations or erasures shall be made on the forms.

10. ALTERNATES

- A. Each Bidder shall bid on alternatives listed. In the event that any alternate does not involve a change in the amount of the Bid, the Bidder shall so

indicate by using the words "No Change" in the space provided for that alternate.

- B. General Bidders shall enter on the form for General Bid a single amount for each alternate, each amount to consist of the total of all the subbidders' amounts for the given alternate plus the amount of for work of the alternate to be performed by the General Contractor.
- C. If alternate(s) are accepted, they shall be accepted in the order listed. The low bidder will be determined on the basis of the sum of the Base Bid and the alternates accepted.

11. SUBMISSION OF BIDS

- A. The Bid Form shall be properly executed and enclosed with the required bid deposit in a sealed envelope plainly marked on the outside with the following information.

Bid For:

SUBMITTED BY:

(Name of Bidder)

(Address of Bidder)

- B. If Bids are mailed; the above required envelope shall be enclosed in a second envelope identified with the above markings and mailed to the place of bid opening, as described in the Invitation to Bid. Mailed Bids must be received before the time scheduled for opening of Bids.

12. PERFORMANCE AND PAYMENT BONDS

- A. Labor and Materials Payment Bond required of the General Contractor shall be in the amount of 50% of the contract sum from a surety company qualified to do business under the laws of the Commonwealth of Massachusetts and approved by the Owner.

13. FOREIGN CORPORATIONS

- A. The attention of bidders is called to General Laws, Chapter 30, Section 39L, as amended by Acts of 1967, Chapter 3, under which the Owner may not enter into a contract with a foreign corporation as a subcontractor unless the foreign corporation has filed with the Owner a certificate by the State Secretary stating that the foreign corporation has complied with General Laws Chapter 181, Sections 3 and 5 and stating the date of such compliance.

14. AWARD OF CONTRACT

- A. The Contract will be awarded to the lowest responsible and eligible bidder except in the event of a substitution as provided by under Chapter 149, Sections 44E and 44F of the above-reference General Laws.

15. COMMENCEMENT AND COMPLETION OF WORK

- A. The successful bidder, upon completion of the Contract Agreement, shall commence the work of the Contract within seven (7) calendar days from receipt of written Notice to Proceed issued by the Owner within fourteen (14) calendar days after said execution of the Contract Agreement, and shall therefore diligently and continuously carry on the work in such manner as to substantially complete the work on or before October 30, 2016 except as noted herein.

16. LIQUIDATED DAMAGES

- A. The attention of bidders is particularly called to the requirements as to the conditions of employment to be observed, the minimum wage rates to be paid under the Contract and affirmative action to ensure equal employment opportunity.

BID FORM

For: Arlington Gateways (Bid #16-42-1)

Proposal (BID) of _____
(hereinafter called "Bidder") a corporation, organized and existing under the laws of the Commonwealth of Massachusetts.

_____ doing business as _____
(corporation, proprietorship, partnership)

to the TOWN OF ARLINGTON hereinafter called "Owner".

Gentlemen:

A. The Bidder, in compliance with your invitation for bids for Arlington Gateways, Arlington Massachusetts, having examined the plan and specifications with related documents and the site of the proposed project including the availability of materials and labor, hereby proposes to furnish all labor, materials and supplies, and to construct the project in accordance with the Contract Documents, within the time set forth therein, and at the prices stated below. These prices are to cover all expenses incurred in performing the work required under the Contract Documents, of which this proposal is a part.

Bidder hereby agrees to commence work under this Contract on or before a date to be specified in the written "Notice to Proceed" from the Owner, and to complete the work by June 15, 2017. The Bidder further agrees to pay as liquidated damages, the sum of \$100.00 for each consecutive calendar day thereafter that the works remains incomplete, as provided in the Instruction to Bidders, Modifications to General Conditions.

B. Bidder acknowledges receipt of the following addendum:

_____ Dated _____
_____ Dated _____
_____ Dated _____

C. Bidder agrees to perform all work described in the specifications and shown on the drawings, for the following lump sum price of:

1. Total Proposed Base Bid Contract Price (Gateway 3):

_____ Dollars (\$ _____)

2. Alternates

This bid includes Alternates as follows:

ADD Alternate No. 1 (Gateway 2): _____ dollars
and _____ cents \$({ _____}).

ADD Alternate No. 2 (Gateway 1): _____ dollars
and _____ cents \$({ _____}).

D. If the Bid is accepted by the Owner, the undersigned agrees to complete the entire work provided to be done under the contract within the time stipulated by the Owner.

E. The undersigned agrees that for extra work, if any, performed in accordance with the AGREEMENT, he will accept compensation as stipulated therein in full payment for such extra work.

- F. Bidder understands that the Owner reserves the right to reject any and all bids.
- G. The undersigned hereby agrees that he will not withdraw the Bid within thirty (30) consecutive calendar days after the actual date of the opening of Bids and that, if the Owner accepts this Bid, the undersigned will duly execute and acknowledge the required Contract Bonds within 10 days after notification that the AGREEMENT is ready for signature.
- H. Should the undersigned fail to fulfill any of his agreements as here in before set forth, the Owner shall have the right to retain as liquidated damages the amount of the Bid security, which shall become the Owner/s property. If a bid was furnished as bid security, it is agreed that the amount thereof shall be paid as liquidated damages to the Owner by the Surety.
- I. The Undersigned certifies under penalty of perjury that this Bid is in all respect bona fide, fair and made without collusion or fraud with any other person. As used in this subsection the "person" shall men natural person, joint venture, partnership, corporation or other business or legal entity.
- J. The undersigned certifies that he is able to furnish labor that can work in harmony with all with all laws and regulations applicable to awards made subject forty-four A.
 - 1. Have been in business under the present name for_____years.
 - 2. Ever failed to complete any work awarded?_____(Yes),_____(No). If yes, explain: _____

K. The Bidder is required to state below all work he/she and his/her subcontractors (if subcontractors are to perform substantial portions of the work) has compete within the past 5 years of a similar character and value to that of the work included in the proposed Contract and to give references that will enable the Owners to judge the Bidder's experience, skill and business standing. The Bidder is required to list a minimum of 3 completed projects that are comparable in scope, complexity and value. For each project, include the name, location, type, date complete, construction value and owner contact.

(add supplementary page if necessary)

L. The Bidder is required to state below all construction projects he/she currently has under contract. For each project, include the name, location, type, scheduled completion date, construction value and owner contact.

M. The undersigned bidder hereby certifies that the tools and equipment required to meet the specified requirements of the Contract document, with special attention called to Section 31 00 00 Earthwork, will be utilized in the performance of the work.

N. The undersigned further certifies under the penalty of perjury that the said undersigned is not presently debarred from doing public construction work in the Commonwealth of Massachusetts under the provisions of section 29F, or any other applicable debarment provisions of any other chapter of the General Laws or any rule or regulation declared there under.

Date: _____

Name of General Bidder

By:

Name and Title of Person Signing Bond

Business Address

FORM A

CERTIFICATE OF NON-COLLUSION

The undersigned certifies under penalties of perjury that this bid is in all respects bona fide, fir and made without collusion or fraud with any other person. As used in this section the word 'person' shall mean any natural person, joint venture, partnership, corporation or other business or legal entity.

Authorized Name

Authorized Signature

Date

Social Security Number or Federal Identification Number

Legal Name of Business Entity (Print or Type)

Address

City, State, Zip Code

Corporate Seal (If applicable)

FORM B

CERTIFICATE OF FOREIGN CORPORATION

The undersigned certifies that it has been duly established, organized, or chartered as a corporation under the laws of:

Jurisdiction

The undersigned further certifies that it complies with the requirements of M.G.L, c. 30, sec. 39L and with the requirements of M.G.L, c. 181 relative to the registration and operation of foreign corporations within the Commonwealth of Massachusetts.

Name of Person Signing the Bid or Proposal Date

Signature of Person Signing the Bid or Proposal Date

Name of Business (Print or Type)

Corporate Seal (If applicable)

FORM C

BIDDER CERTIFICATION REGARDING PAYMENT OF PREVAILING WAGES

The undersigned hereby certifies, under pains and penalties of perjury, that the foregoing bid is based upon the payment to laborers to be employed on the project of wages in an amount no less than the applicable wage rates established for the project by the Massachusetts Department of Labor and Industries. The undersigned bidder agrees to identify the awarding authority for, from, and against any loss, expense, damages, action, or claims, including any expense incurred in connection with any delay or stoppage of the project work, arising out of or as a result of (1) the failure of the said bid to be based upon the payment of the said applicable prevailing wage rates or (2) the failure of the bidder, if selected as the contractor, to pay laborers employed on the project the said applying prevailing wage rates.

Date

Name of Person Signing the Bid or Proposal

Signature of Person Signing the Bid or Proposal Title

Name of Business (Print or Type)

Corporate Seal (If applicable)

FORM D

CERTIFICATION OF PAYMENT OF STATE TAXES

Legislation enacted by the Commonwealth of Massachusetts, effective, 1983, requires that attestation below be signed:

Pursuant top M.G.L c. 62C, sec. 49A, I certify under the penalties of perjury, that I, to my best knowledge and belief, have filed all state tax returns and paid all state taxes required by law.

APPROVAL OF A CONTRACT OR ANY OTHER AGREEMENT WILL NOT BE GRANTED UNLESS THIS CERITFCATION CLAUSE IS SIGNED BY AN AUTHORIZED CORPROATE OFFICER.

THE TAX PAYER IDENTIFICATION NUMBER WILL BE FURNISHED TO THE MASSACHUSETIS DPEARTMENT OF REVENUE TO DETERMINE IF TAX FILINGS AND/OR TAX PAYMENT OBLIGATIONS HAVE BEEN MET. PROVIDERS WHO FAIL TO CORRECT THIER NON-FILING AND/OR DELIQUENCY STATUS SHALL NOT HAVE A CONTRACT OR ANY OTHER AGREEMENT ISSUED, RENEWED OR EXTENDED

(Signature of Individual) Title

Social Security Number or Federal Identification Number

Corporate Name

Name of Person Signing the Proposal (Print or Type) Date

Legal Name of Business Entity (Print or Type)

Business Address

Corporate Seal (If applicable)

To view and print Weekly Payroll & Statement of Compliance Forms, click on www.mass.gov/dols/pw.

PLEASE NOTE: The attached Prevailing Wage Schedule is valid for 90 days. An Awarding Authority should re-request an up to date Prevailing Wage Schedule if it has NOT opened bids or selected a contractor within 90 days of the issuance date of the attached prevailing wage schedule.

*For MULTI-YEAR projects bid on or after 8/8/08, Awarding Authorities must request an Annual Update to this Prevailing Wage Schedule each year for the duration of the project, no later than two weeks before the anniversary date of the execution of the general contract. Annual updates are not required for projects that last LESS THAN ONE YEAR.

*For CM AT RISK projects (bid pursuant to GL c.149A), Awarding Authorities must request a Prevailing Wage Schedule NOT sooner than 90-days before the earlier of: (a) the execution date of the GMP Amendment, or (b) the bid for the first construction scope of work.

*For MULTI-YEAR CM AT RISK projects, Awarding Authorities must request an Annual Update to this Prevailing Wage Schedule each year for the duration of the project, no later than two weeks before the anniversary date, which is the earlier of: (a) the execution date of the GMP Amendment, or (b) the execution date of the first amendment to procure construction scopes of work.

Apprentice wages (expressed as dollar figures) and the required benefits are listed on the Prevailing Wage Schedule. For further details, please see opinion letter PW-2010-03-03.16.10 (dated March 18, 2010) at www.mass.gov/dols/pw.

Request Prevailing Wage Rates online at: www.mass.gov/dols/pw.

THIS IS A SYSTEM-GENERATED EMAIL. PLEASE DO NOT REPLY TO THIS EMAIL. TO CONTACT DLS REGARDING PREVAILING WAGE MATTERS, CALL 617-626-6953.

=====

APPROVAL/DENIAL COMMENTS

This e-mail message, including any attachments, is for the sole use of the intended recipient(s) and may contain confidential and privileged information. Any unauthorized review, use, disclosure, or distribution is strictly prohibited and may be the subject of legal action. If you are not the intended recipient, please contact the sender by reply e-mail and destroy all copies of the original message. Thank you.



**THE COMMONWEALTH OF MASSACHUSETTS
EXECUTIVE OFFICE OF LABOR AND WORKFORCE DEVELOPMENT
DEPARTMENT OF LABOR STANDARDS**

Prevailing Wage Rates

**As determined by the Director under the provisions of the
Massachusetts General Laws, Chapter 149, Sections 26 to 27H**

RONALD L. WALKER, II
Secretary

WILLIAM D MCKINNEY
Director

CHARLES D. BAKER
Governor

KARYN E. POLITO
Lt. Governor

Awarding Authority: Town of Arlington
Contract Number: 16-42 **City/Town:** ARLINGTON
Description of Work: Arlington Gateways Project - Signage Fabrication & Installation, Landscaping & Irrigation Installation as required.
Job Location: Various

Information about Prevailing Wage Schedules for Awarding Authorities and Contractors

- This wage schedule applies only to the specific project referenced at the top of this page and uniquely identified by the “Wage Request Number” on all pages of this schedule.
- An Awarding Authority must request an updated wage schedule from the Department of Labor Standards (“DLS”) if it has not opened bids or selected a contractor within 90 days of the date of issuance of the wage schedule. For CM AT RISK projects (bid pursuant to G.L. c.149A), the earlier of: (a) the execution date of the GMP Amendment, or (b) the bid for the first construction scope of work must be within 90-days of the wage schedule issuance date.
- The wage schedule shall be incorporated in any advertisement or call for bids for the project as required by M.G.L. c. 149, § 27. The wage schedule shall be made a part of the contract awarded for the project. The wage schedule must be posted in a conspicuous place at the work site for the life of the project in accordance with M.G.L. c. 149 § 27. The wages listed on the wage schedule must be paid to employees performing construction work on the project whether they are employed by the prime contractor, a filed sub-bidder, or any sub-contractor.
- All apprentices working on the project are required to be registered with the Massachusetts Department of Labor Standards, Division of Apprentice Standards (DLS/DAS). Apprentice must keep his/her apprentice identification card on his/her person during all work hours on the project. An apprentice registered with DAS may be paid the lower apprentice wage rate at the applicable step as provided on the prevailing wage schedule. **Any apprentice not registered with DLS/DAS regardless of whether or not they are registered with any other federal, state, local, or private agency must be paid the journeyworker's rate for the trade.**
- The wage rates will remain in effect for the duration of the project, except in the case of multi-year public construction projects. For construction projects lasting longer than one year, awarding authorities must request an updated wage schedule. Awarding authorities are required to request these updates no later than two weeks before the anniversary of the date the contract was executed by the awarding authority and the general contractor. For multi-year CM AT RISK projects, awarding authority must request an annual update no later than two weeks before the anniversary date, determined as the earlier of: (a) the execution date of the GMP Amendment, or (b) the execution date of the first amendment to permit procurement of construction services. Contractors are required to obtain the wage schedules from awarding authorities, and to pay no less than these rates to covered workers. The annual update requirement is not applicable to 27F “rental of equipment” contracts.
- Every contractor or subcontractor which performs construction work on the project is required to submit weekly payroll reports and a Statement of Compliance directly to the awarding authority by mail or email and keep them on file for three years. Each weekly payroll report must contain: the employee’s name, address, occupational classification, hours worked, and wages paid. Do not submit weekly payroll reports to DLS. A sample of a payroll reporting form may be obtained at <http://www.mass.gov/dols/pw>.
- Contractors with questions about the wage rates or classifications included on the wage schedule have an affirmative obligation to inquire with DLS at (617) 626-6953.
- Employees not receiving the prevailing wage rate set forth on the wage schedule may report the violation to the Fair Labor Division of the office of the Attorney General at (617) 727-3465.
- Failure of a contractor or subcontractor to pay the prevailing wage rates listed on the wage schedule to all employees who perform construction work on the project is a violation of the law and subjects the contractor or subcontractor to civil and

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
Construction						
(2 AXLE) DRIVER - EQUIPMENT <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.25	\$10.91	\$10.08	\$0.00	\$54.24
	12/01/2016	\$33.25	\$10.91	\$10.89	\$0.00	\$55.05
(3 AXLE) DRIVER - EQUIPMENT <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.32	\$10.91	\$10.08	\$0.00	\$54.31
	12/01/2016	\$33.32	\$10.91	\$10.89	\$0.00	\$55.12
(4 & 5 AXLE) DRIVER - EQUIPMENT <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.44	\$10.91	\$10.08	\$0.00	\$54.43
	12/01/2016	\$33.44	\$10.91	\$10.89	\$0.00	\$55.24
ADS/SUBMERSIBLE PILOT <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$88.29	\$9.80	\$19.23	\$0.00	\$117.32
For apprentice rates see "Apprentice- PILE DRIVER"						
AIR TRACK OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.60	\$7.45	\$13.80	\$0.00	\$57.85
	12/01/2016	\$37.60	\$7.45	\$13.80	\$0.00	\$58.85
For apprentice rates see "Apprentice- LABORER"						
ASBESTOS REMOVER - PIPE / MECH. EQUIPT. <i>HEAT & FROST INSULATORS LOCAL 6 (BOSTON)</i>	06/01/2016	\$32.90	\$11.50	\$7.10	\$0.00	\$51.50
	12/01/2016	\$33.90	\$11.50	\$7.10	\$0.00	\$52.50
	06/01/2017	\$34.90	\$11.50	\$7.10	\$0.00	\$53.50
	12/01/2017	\$35.90	\$11.50	\$7.10	\$0.00	\$54.50
	06/01/2018	\$36.90	\$11.50	\$7.10	\$0.00	\$55.50
	12/01/2018	\$37.90	\$11.50	\$7.10	\$0.00	\$56.50
	06/01/2019	\$38.90	\$11.50	\$7.10	\$0.00	\$57.50
	12/01/2019	\$39.90	\$11.50	\$7.10	\$0.00	\$58.50
	06/01/2020	\$40.90	\$11.50	\$7.10	\$0.00	\$59.50
	12/01/2020	\$41.90	\$11.50	\$7.10	\$0.00	\$60.50
ASPHALT RAKER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
ASPHALT/CONCRETE/CRUSHER PLANT-ON SITE <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
BACKHOE/FRONT-END LOADER <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
BARCO-TYPE JUMPING TAMPER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
BLOCK PAVER, RAMMER / CURB SETTER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.60	\$7.45	\$13.80	\$0.00	\$57.85
	12/01/2016	\$37.60	\$7.45	\$13.80	\$0.00	\$58.85
For apprentice rates see "Apprentice- LABORER"						
BOILER MAKER <i>BOILERMAKERS LOCAL 29</i>	01/01/2016	\$41.62	\$6.97	\$16.21	\$0.00	\$64.80
	01/01/2017	\$42.92	\$6.97	\$16.21	\$0.00	\$66.10

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - BOILERMAKER - Local 29

Effective Date - 01/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	65	\$27.05	\$6.97	\$10.54	\$0.00	\$44.56
2	65	\$27.05	\$6.97	\$10.54	\$0.00	\$44.56
3	70	\$29.13	\$6.97	\$11.35	\$0.00	\$47.45
4	75	\$31.22	\$6.97	\$12.16	\$0.00	\$50.35
5	80	\$33.30	\$6.97	\$12.97	\$0.00	\$53.24
6	85	\$35.38	\$6.97	\$13.78	\$0.00	\$56.13
7	90	\$37.46	\$6.97	\$14.59	\$0.00	\$59.02
8	95	\$39.54	\$6.97	\$15.40	\$0.00	\$61.91

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	65	\$27.90	\$6.97	\$10.54	\$0.00	\$45.41
2	65	\$27.90	\$6.97	\$10.54	\$0.00	\$45.41
3	70	\$30.04	\$6.97	\$11.35	\$0.00	\$48.36
4	75	\$32.19	\$6.97	\$12.16	\$0.00	\$51.32
5	80	\$34.34	\$6.97	\$12.97	\$0.00	\$54.28
6	85	\$36.48	\$6.97	\$13.78	\$0.00	\$57.23
7	90	\$38.63	\$6.97	\$14.59	\$0.00	\$60.19
8	95	\$40.77	\$6.97	\$15.40	\$0.00	\$63.14

Notes:

Apprentice to Journeyworker Ratio:1:5

BRICK/STONE/ARTIFICIAL MASONRY (INCL. MASONRY WATERPROOFING)	08/01/2016	\$50.76	\$10.18	\$19.22	\$0.00	\$80.16
BRICKLAYERS LOCAL 3 (BOSTON)	02/01/2017	\$51.33	\$10.18	\$19.22	\$0.00	\$80.73

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - BRICK/PLASTER/CEMENT MASON - Local 3 Boston

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.38	\$10.18	\$19.22	\$0.00	\$54.78
2	60	\$30.46	\$10.18	\$19.22	\$0.00	\$59.86
3	70	\$35.53	\$10.18	\$19.22	\$0.00	\$64.93
4	80	\$40.61	\$10.18	\$19.22	\$0.00	\$70.01
5	90	\$45.68	\$10.18	\$19.22	\$0.00	\$75.08

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.67	\$10.18	\$19.22	\$0.00	\$55.07
2	60	\$30.80	\$10.18	\$19.22	\$0.00	\$60.20
3	70	\$35.93	\$10.18	\$19.22	\$0.00	\$65.33
4	80	\$41.06	\$10.18	\$19.22	\$0.00	\$70.46
5	90	\$46.20	\$10.18	\$19.22	\$0.00	\$75.60

Notes:

Apprentice to Journeyworker Ratio:1:5

BULLDOZER/GRADER/SCRAPER <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

CAISSON & UNDERPINNING BOTTOM MAN <i>LABORERS - FOUNDATION AND MARINE</i>	06/01/2016	\$36.95	\$7.45	\$14.00	\$0.00	\$58.40
	12/01/2016	\$37.95	\$7.45	\$14.00	\$0.00	\$59.40

For apprentice rates see "Apprentice- LABORER"

CAISSON & UNDERPINNING LABORER <i>LABORERS - FOUNDATION AND MARINE</i>	06/01/2016	\$35.80	\$7.45	\$14.00	\$0.00	\$57.25
	12/01/2016	\$36.80	\$7.45	\$14.00	\$0.00	\$58.25

For apprentice rates see "Apprentice- LABORER"

CAISSON & UNDERPINNING TOP MAN <i>LABORERS - FOUNDATION AND MARINE</i>	06/01/2016	\$35.80	\$7.45	\$14.00	\$0.00	\$57.25
	12/01/2016	\$36.80	\$7.45	\$14.00	\$0.00	\$58.25

For apprentice rates see "Apprentice- LABORER"

CARBIDE CORE DRILL OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

CARPENTER <i>CARPENTERS -ZONE 2 (Eastern Massachusetts)</i>	09/01/2016	\$38.08	\$9.80	\$16.82	\$0.00	\$64.70
	03/01/2017	\$39.05	\$9.80	\$16.82	\$0.00	\$65.67
	09/01/2017	\$40.06	\$9.80	\$16.82	\$0.00	\$66.68
	03/01/2018	\$41.06	\$9.80	\$16.82	\$0.00	\$67.68
	09/01/2018	\$42.10	\$9.80	\$16.82	\$0.00	\$68.72
	03/01/2019	\$43.13	\$9.80	\$16.82	\$0.00	\$69.75

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - CARPENTER - Zone 2 Eastern MA

Effective Date - 09/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.04	\$9.80	\$1.63	\$0.00	\$30.47
2	60	\$22.85	\$9.80	\$1.63	\$0.00	\$34.28
3	70	\$26.66	\$9.80	\$11.93	\$0.00	\$48.39
4	75	\$28.56	\$9.80	\$11.93	\$0.00	\$50.29
5	80	\$30.46	\$9.80	\$13.56	\$0.00	\$53.82
6	80	\$30.46	\$9.80	\$13.56	\$0.00	\$53.82
7	90	\$34.27	\$9.80	\$15.19	\$0.00	\$59.26
8	90	\$34.27	\$9.80	\$15.19	\$0.00	\$59.26

Effective Date - 03/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.53	\$9.80	\$1.63	\$0.00	\$30.96
2	60	\$23.43	\$9.80	\$1.63	\$0.00	\$34.86
3	70	\$27.34	\$9.80	\$11.93	\$0.00	\$49.07
4	75	\$29.29	\$9.80	\$11.93	\$0.00	\$51.02
5	80	\$31.24	\$9.80	\$13.56	\$0.00	\$54.60
6	80	\$31.24	\$9.80	\$13.56	\$0.00	\$54.60
7	90	\$35.15	\$9.80	\$15.19	\$0.00	\$60.14
8	90	\$35.15	\$9.80	\$15.19	\$0.00	\$60.14

Notes:

Apprentice to Journeyworker Ratio:1:5

CEMENT MASONRY/PLASTERING BRICKLAYERS LOCAL 3 (BOSTON)	01/01/2016	\$46.44	\$10.90	\$18.71	\$1.30	\$77.35
-------------------------------------------------------------------	-------------------	----------------	----------------	----------------	---------------	----------------

Apprentice - CEMENT MASONRY/PLASTERING - Eastern Mass (Boston)

Effective Date - 01/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$23.22	\$10.90	\$12.21	\$0.00	\$46.33
2	60	\$27.86	\$10.90	\$13.71	\$1.30	\$53.77
3	65	\$30.19	\$10.90	\$14.71	\$1.30	\$57.10
4	70	\$32.51	\$10.90	\$15.71	\$1.30	\$60.42
5	75	\$34.83	\$10.90	\$16.71	\$1.30	\$63.74
6	80	\$37.15	\$10.90	\$17.71	\$1.30	\$67.06
7	90	\$41.80	\$10.90	\$18.71	\$1.30	\$72.71

Notes:
Steps 3,4 are 500 hrs. All other steps are 1,000 hrs.

Apprentice to Journeyworker Ratio:1:3

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
CHAIN SAW OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
CLAM SHELLS/SLURRY BUCKETS/HEADING MACHINES <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$45.23	\$10.00	\$15.15	\$0.00	\$70.38
	12/01/2016	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	06/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63
	12/01/2017	\$48.48	\$10.00	\$15.15	\$0.00	\$73.63
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
COMPRESSOR OPERATOR <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$30.40	\$10.00	\$15.15	\$0.00	\$55.55
	12/01/2016	\$31.27	\$10.00	\$15.15	\$0.00	\$56.42
	06/01/2017	\$31.96	\$10.00	\$15.15	\$0.00	\$57.11
	12/01/2017	\$32.65	\$10.00	\$15.15	\$0.00	\$57.80
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
DELEADER (BRIDGE) <i>PAINTERS LOCAL 35 - ZONE 2</i>	07/01/2016	\$50.46	\$7.85	\$16.10	\$0.00	\$74.41
	01/01/2017	\$51.41	\$7.85	\$16.10	\$0.00	\$75.36

Apprentice - PAINTER Local 35 - BRIDGES/TANKS

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.23	\$7.85	\$0.00	\$0.00	\$33.08
2	55	\$27.75	\$7.85	\$3.66	\$0.00	\$39.26
3	60	\$30.28	\$7.85	\$3.99	\$0.00	\$42.12
4	65	\$32.80	\$7.85	\$4.32	\$0.00	\$44.97
5	70	\$35.32	\$7.85	\$14.11	\$0.00	\$57.28
6	75	\$37.85	\$7.85	\$14.44	\$0.00	\$60.14
7	80	\$40.37	\$7.85	\$14.77	\$0.00	\$62.99
8	90	\$45.41	\$7.85	\$15.44	\$0.00	\$68.70

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.71	\$7.85	\$0.00	\$0.00	\$33.56
2	55	\$28.28	\$7.85	\$3.66	\$0.00	\$39.79
3	60	\$30.85	\$7.85	\$3.99	\$0.00	\$42.69
4	65	\$33.42	\$7.85	\$4.32	\$0.00	\$45.59
5	70	\$35.99	\$7.85	\$14.11	\$0.00	\$57.95
6	75	\$38.56	\$7.85	\$14.44	\$0.00	\$60.85
7	80	\$41.13	\$7.85	\$14.77	\$0.00	\$63.75
8	90	\$46.27	\$7.85	\$15.44	\$0.00	\$69.56

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

DEMO: ADZEMAN <i>LABORERS - ZONE 1</i>	12/01/2015	\$35.50	\$7.45	\$13.55	\$0.00	\$56.50
For apprentice rates see "Apprentice- LABORER"						

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
DEMO: BACKHOE/LOADER/HAMMER OPERATOR <i>LABORERS - ZONE 1</i>	12/01/2015	\$36.50	\$7.45	\$13.55	\$0.00	\$57.50
For apprentice rates see "Apprentice- LABORER"						
DEMO: BURNERS <i>LABORERS - ZONE 1</i>	12/01/2015	\$36.25	\$7.45	\$13.55	\$0.00	\$57.25
For apprentice rates see "Apprentice- LABORER"						
DEMO: CONCRETE CUTTER/SAWYER <i>LABORERS - ZONE 1</i>	12/01/2015	\$36.50	\$7.45	\$13.55	\$0.00	\$57.50
For apprentice rates see "Apprentice- LABORER"						
DEMO: JACKHAMMER OPERATOR <i>LABORERS - ZONE 1</i>	12/01/2015	\$36.25	\$7.45	\$13.55	\$0.00	\$57.25
For apprentice rates see "Apprentice- LABORER"						
DEMO: WRECKING LABORER <i>LABORERS - ZONE 1</i>	12/01/2015	\$35.50	\$7.45	\$13.55	\$0.00	\$56.50
For apprentice rates see "Apprentice- LABORER"						
DIRECTIONAL DRILL MACHINE OPERATOR <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
DIVER <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$58.86	\$9.80	\$19.23	\$0.00	\$87.89
For apprentice rates see "Apprentice- PILE DRIVER"						
DIVER TENDER <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$42.04	\$9.80	\$19.23	\$0.00	\$71.07
For apprentice rates see "Apprentice- PILE DRIVER"						
DIVER TENDER (EFFLUENT) <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$63.06	\$9.80	\$19.23	\$0.00	\$92.09
For apprentice rates see "Apprentice- PILE DRIVER"						
DIVER/SLURRY (EFFLUENT) <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$88.23	\$9.80	\$19.23	\$0.00	\$117.26
For apprentice rates see "Apprentice- PILE DRIVER"						
DRAWBRIDGE OPERATOR (Construction) <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$46.17	\$13.00	\$16.39	\$0.00	\$75.56
For apprentice rates see "Apprentice- ELECTRICIAN"						
ELECTRICIAN <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$46.17	\$13.00	\$16.39	\$0.00	\$75.56

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - ELECTRICIAN - Local 103

Effective Date - 03/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$18.47	\$13.00	\$0.55	\$0.00	\$32.02
2	40	\$18.47	\$13.00	\$0.55	\$0.00	\$32.02
3	45	\$20.78	\$13.00	\$12.34	\$0.00	\$46.12
4	45	\$20.78	\$13.00	\$12.34	\$0.00	\$46.12
5	50	\$23.09	\$13.00	\$12.71	\$0.00	\$48.80
6	55	\$25.39	\$13.00	\$13.07	\$0.00	\$51.46
7	60	\$27.70	\$13.00	\$13.44	\$0.00	\$54.14
8	65	\$30.01	\$13.00	\$13.81	\$0.00	\$56.82
9	70	\$32.32	\$13.00	\$14.18	\$0.00	\$59.50
10	75	\$34.63	\$13.00	\$14.55	\$0.00	\$62.18

Notes:
App Prior 1/1/03; 30/35/40/45/50/55/65/70/75/80

Apprentice to Journeyworker Ratio:2:3***

ELEVATOR CONSTRUCTOR	01/01/2016	\$54.53	\$14.43	\$14.96	\$0.00	\$83.92
ELEVATOR CONSTRUCTORS LOCAL 4	01/01/2017	\$55.86	\$15.28	\$15.71	\$0.00	\$86.85

Apprentice - ELEVATOR CONSTRUCTOR - Local 4

Effective Date - 01/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$27.27	\$14.43	\$0.00	\$0.00	\$41.70
2	55	\$29.99	\$14.43	\$14.96	\$0.00	\$59.38
3	65	\$35.44	\$14.43	\$14.96	\$0.00	\$64.83
4	70	\$38.17	\$14.43	\$14.96	\$0.00	\$67.56
5	80	\$43.62	\$14.43	\$14.96	\$0.00	\$73.01

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$27.93	\$15.28	\$0.00	\$0.00	\$43.21
2	55	\$30.72	\$15.28	\$15.71	\$0.00	\$61.71
3	65	\$36.31	\$15.28	\$15.71	\$0.00	\$67.30
4	70	\$39.10	\$15.28	\$15.71	\$0.00	\$70.09
5	80	\$44.69	\$15.28	\$15.71	\$0.00	\$75.68

Notes:
Steps 1-2 are 6 mos.; Steps 3-5 are 1 year

Apprentice to Journeyworker Ratio:1:1

ELEVATOR CONSTRUCTOR HELPER	01/01/2016	\$38.17	\$14.43	\$14.96	\$0.00	\$67.56
ELEVATOR CONSTRUCTORS LOCAL 4	01/01/2017	\$39.10	\$15.28	\$15.71	\$0.00	\$70.09

For apprentice rates see "Apprentice - ELEVATOR CONSTRUCTOR"

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
FENCE & GUARD RAIL ERECTOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
FIELD ENG.INST.PERSON-BLDG,SITE,HVY/HWY <i>OPERATING ENGINEERS LOCAL 4</i>	05/01/2016	\$41.03	\$10.00	\$14.90	\$0.00	\$65.93
	11/01/2016	\$41.62	\$10.00	\$14.90	\$0.00	\$66.52
	05/01/2017	\$42.50	\$10.00	\$14.90	\$0.00	\$67.40
	11/01/2017	\$43.23	\$10.00	\$14.90	\$0.00	\$68.13
	05/01/2018	\$43.94	\$10.00	\$14.90	\$0.00	\$68.84
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
FIELD ENG.PARTY CHIEF-BLDG,SITE,HVY/HWY <i>OPERATING ENGINEERS LOCAL 4</i>	05/01/2016	\$42.47	\$10.00	\$14.90	\$0.00	\$67.37
	11/01/2016	\$43.07	\$10.00	\$14.90	\$0.00	\$67.97
	05/01/2017	\$43.96	\$10.00	\$14.90	\$0.00	\$68.86
	11/01/2017	\$44.69	\$10.00	\$14.90	\$0.00	\$69.59
	05/01/2018	\$45.41	\$10.00	\$14.90	\$0.00	\$70.31
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
FIELD ENG.ROD PERSON-BLDG,SITE,HVY/HWY <i>OPERATING ENGINEERS LOCAL 4</i>	05/01/2016	\$21.88	\$10.00	\$14.90	\$0.00	\$46.78
	11/01/2016	\$22.23	\$10.00	\$14.90	\$0.00	\$47.13
	05/01/2017	\$22.76	\$10.00	\$14.90	\$0.00	\$47.66
	11/01/2017	\$23.18	\$10.00	\$14.90	\$0.00	\$48.08
	05/01/2018	\$23.61	\$10.00	\$14.90	\$0.00	\$48.51
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
FIRE ALARM INSTALLER <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$46.17	\$13.00	\$16.39	\$0.00	\$75.56
For apprentice rates see "Apprentice- ELECTRICIAN"						
FIRE ALARM REPAIR / MAINTENANCE / COMMISSIONING <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$34.63	\$13.00	\$14.55	\$0.00	\$62.18
For apprentice rates see "Apprentice- TELECOMMUNICATIONS TECHNICIAN"						
FIREMAN (ASST. ENGINEER) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$36.71	\$10.00	\$15.15	\$0.00	\$61.86
	12/01/2016	\$37.75	\$10.00	\$15.15	\$0.00	\$62.90
	06/01/2017	\$38.59	\$10.00	\$15.15	\$0.00	\$63.74
	12/01/2017	\$39.42	\$10.00	\$15.15	\$0.00	\$64.57
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
FLAGGER & SIGNALER <i>LABORERS - ZONE 1</i>	06/01/2016	\$20.50	\$7.45	\$13.80	\$0.00	\$41.75
	12/01/2016	\$20.50	\$7.45	\$13.80	\$0.00	\$41.75
For apprentice rates see "Apprentice- LABORER"						
FLOORCOVERER <i>FLOORCOVERERS LOCAL 2168 ZONE 1</i>	03/01/2016	\$42.13	\$9.80	\$17.62	\$0.00	\$69.55

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - FLOORCOVERER - Local 2168 Zone I

Effective Date - 03/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$21.07	\$9.80	\$1.79	\$0.00	\$32.66
2	55	\$23.17	\$9.80	\$1.79	\$0.00	\$34.76
3	60	\$25.28	\$9.80	\$12.25	\$0.00	\$47.33
4	65	\$27.38	\$9.80	\$12.25	\$0.00	\$49.43
5	70	\$29.49	\$9.80	\$14.04	\$0.00	\$53.33
6	75	\$31.60	\$9.80	\$14.04	\$0.00	\$55.44
7	80	\$33.70	\$9.80	\$15.83	\$0.00	\$59.33
8	85	\$35.81	\$9.80	\$15.83	\$0.00	\$61.44

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

FORK LIFT/CHERRY PICKER	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
<i>OPERATING ENGINEERS LOCAL 4</i>	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

GENERATOR/LIGHTING PLANT/HEATERS	06/01/2016	\$30.40	\$10.00	\$15.15	\$0.00	\$55.55
<i>OPERATING ENGINEERS LOCAL 4</i>	12/01/2016	\$31.27	\$10.00	\$15.15	\$0.00	\$56.42
	06/01/2017	\$31.96	\$10.00	\$15.15	\$0.00	\$57.11
	12/01/2017	\$32.65	\$10.00	\$15.15	\$0.00	\$57.80

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

GLAZIER (GLASS PLANK/AIR BARRIER/INTERIOR SYSTEMS)	07/01/2016	\$39.96	\$7.85	\$16.10	\$0.00	\$63.91
<i>GLAZIERS LOCAL 35 (ZONE 2)</i>	01/01/2017	\$40.91	\$7.85	\$16.10	\$0.00	\$64.86

Apprentice - GLAZIER - Local 35 Zone 2

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.98	\$7.85	\$0.00	\$0.00	\$27.83
2	55	\$21.98	\$7.85	\$3.66	\$0.00	\$33.49
3	60	\$23.98	\$7.85	\$3.99	\$0.00	\$35.82
4	65	\$25.97	\$7.85	\$4.32	\$0.00	\$38.14
5	70	\$27.97	\$7.85	\$14.11	\$0.00	\$49.93
6	75	\$29.97	\$7.85	\$14.44	\$0.00	\$52.26
7	80	\$31.97	\$7.85	\$14.77	\$0.00	\$54.59
8	90	\$35.96	\$7.85	\$15.44	\$0.00	\$59.25

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$20.46	\$7.85	\$0.00	\$0.00	\$28.31
2	55	\$22.50	\$7.85	\$3.66	\$0.00	\$34.01
3	60	\$24.55	\$7.85	\$3.99	\$0.00	\$36.39
4	65	\$26.59	\$7.85	\$4.32	\$0.00	\$38.76
5	70	\$28.64	\$7.85	\$14.11	\$0.00	\$50.60
6	75	\$30.68	\$7.85	\$14.44	\$0.00	\$52.97
7	80	\$32.73	\$7.85	\$14.77	\$0.00	\$55.35
8	90	\$36.82	\$7.85	\$15.44	\$0.00	\$60.11

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

HOISTING ENGINEER/CRANES/GRADALLS	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
OPERATING ENGINEERS LOCAL 4	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - OPERATING ENGINEERS - Local 4

Effective Date - 06/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	55	\$24.33	\$10.00	\$0.00	\$0.00	\$34.33
2	60	\$26.54	\$10.00	\$15.15	\$0.00	\$51.69
3	65	\$28.75	\$10.00	\$15.15	\$0.00	\$53.90
4	70	\$30.96	\$10.00	\$15.15	\$0.00	\$56.11
5	75	\$33.17	\$10.00	\$15.15	\$0.00	\$58.32
6	80	\$35.38	\$10.00	\$15.15	\$0.00	\$60.53
7	85	\$37.60	\$10.00	\$15.15	\$0.00	\$62.75
8	90	\$39.81	\$10.00	\$15.15	\$0.00	\$64.96

Effective Date - 12/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	55	\$25.01	\$10.00	\$0.00	\$0.00	\$35.01
2	60	\$27.29	\$10.00	\$15.15	\$0.00	\$52.44
3	65	\$29.56	\$10.00	\$15.15	\$0.00	\$54.71
4	70	\$31.84	\$10.00	\$15.15	\$0.00	\$56.99
5	75	\$34.11	\$10.00	\$15.15	\$0.00	\$59.26
6	80	\$36.38	\$10.00	\$15.15	\$0.00	\$61.53
7	85	\$38.66	\$10.00	\$15.15	\$0.00	\$63.81
8	90	\$40.93	\$10.00	\$15.15	\$0.00	\$66.08

Notes:

Apprentice to Journeyworker Ratio:1:6

HVAC (DUCTWORK) <i>SHEETMETAL WORKERS LOCAL 17 - A</i>	08/01/2016	\$43.31	\$10.70	\$23.07	\$2.31	\$79.39
	02/01/2017	\$44.41	\$10.70	\$23.07	\$2.31	\$80.49
	08/01/2017	\$45.51	\$10.70	\$23.07	\$2.31	\$81.59
	02/01/2018	\$46.66	\$10.70	\$23.07	\$2.31	\$82.74

For apprentice rates see "Apprentice- SHEET METAL WORKER"

HVAC (ELECTRICAL CONTROLS) <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$46.17	\$13.00	\$16.39	\$0.00	\$75.56
-------------------------------------------------------------	------------	---------	---------	---------	--------	---------

For apprentice rates see "Apprentice- ELECTRICIAN"

HVAC (TESTING AND BALANCING - AIR) <i>SHEETMETAL WORKERS LOCAL 17 - A</i>	08/01/2016	\$43.31	\$10.70	\$23.07	\$2.31	\$79.39
	02/01/2017	\$44.41	\$10.70	\$23.07	\$2.31	\$80.49
	08/01/2017	\$45.51	\$10.70	\$23.07	\$2.31	\$81.59
	02/01/2018	\$46.66	\$10.70	\$23.07	\$2.31	\$82.74

For apprentice rates see "Apprentice- SHEET METAL WORKER"

HVAC (TESTING AND BALANCING -WATER) <i>PIPEFITTERS LOCAL 537</i>	09/01/2016	\$50.19	\$9.70	\$18.14	\$0.00	\$78.03
	03/01/2017	\$51.19	\$9.70	\$18.14	\$0.00	\$79.03

For apprentice rates see "Apprentice- PIPEFITTER" or "PLUMBER/PIPEFITTER"

HVAC MECHANIC <i>PIPEFITTERS LOCAL 537</i>	09/01/2016	\$50.19	\$9.70	\$18.14	\$0.00	\$78.03
	03/01/2017	\$51.19	\$9.70	\$18.14	\$0.00	\$79.03

For apprentice rates see "Apprentice- PIPEFITTER" or "PLUMBER/PIPEFITTER"

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
HYDRAULIC DRILLS <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.60	\$7.45	\$13.80	\$0.00	\$57.85
	12/01/2016	\$37.60	\$7.45	\$13.80	\$0.00	\$58.85
For apprentice rates see "Apprentice- LABORER"						
INSULATOR (PIPES & TANKS) <i>HEAT & FROST INSULATORS LOCAL 6 (BOSTON)</i>	09/01/2016	\$45.09	\$11.75	\$14.20	\$0.00	\$71.04
	09/01/2017	\$47.09	\$11.75	\$14.20	\$0.00	\$73.04
	09/01/2018	\$49.34	\$11.75	\$14.20	\$0.00	\$75.29
	09/01/2019	\$51.84	\$11.75	\$14.20	\$0.00	\$77.79

Apprentice - ASBESTOS INSULATOR (Pipes & Tanks) - Local 6 Boston

Effective Date - 09/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$22.55	\$11.75	\$10.45	\$0.00	\$44.75
2	60	\$27.05	\$11.75	\$11.20	\$0.00	\$50.00
3	70	\$31.56	\$11.75	\$11.95	\$0.00	\$55.26
4	80	\$36.07	\$11.75	\$12.70	\$0.00	\$60.52

Effective Date - 09/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$23.55	\$11.75	\$10.45	\$0.00	\$45.75
2	60	\$28.25	\$11.75	\$11.20	\$0.00	\$51.20
3	70	\$32.96	\$11.75	\$11.95	\$0.00	\$56.66
4	80	\$37.67	\$11.75	\$12.70	\$0.00	\$62.12

Notes:

Steps are 1 year

Apprentice to Journeyworker Ratio:1:4

IRONWORKER/WELDER <i>IRONWORKERS LOCAL 7 (BOSTON AREA)</i>	03/16/2016	\$43.40	\$7.80	\$20.85	\$0.00	\$72.05
	09/16/2016	\$44.05	\$7.80	\$20.85	\$0.00	\$72.70
	03/16/2017	\$44.65	\$7.80	\$20.85	\$0.00	\$73.30

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - IRONWORKER - Local 7 Boston

Effective Date - 03/16/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$26.04	\$7.80	\$20.85	\$0.00	\$54.69
2	70	\$30.38	\$7.80	\$20.85	\$0.00	\$59.03
3	75	\$32.55	\$7.80	\$20.85	\$0.00	\$61.20
4	80	\$34.72	\$7.80	\$20.85	\$0.00	\$63.37
5	85	\$36.89	\$7.80	\$20.85	\$0.00	\$65.54
6	90	\$39.06	\$7.80	\$20.85	\$0.00	\$67.71

Effective Date - 09/16/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$26.43	\$7.80	\$20.85	\$0.00	\$55.08
2	70	\$30.84	\$7.80	\$20.85	\$0.00	\$59.49
3	75	\$33.04	\$7.80	\$20.85	\$0.00	\$61.69
4	80	\$35.24	\$7.80	\$20.85	\$0.00	\$63.89
5	85	\$37.44	\$7.80	\$20.85	\$0.00	\$66.09
6	90	\$39.65	\$7.80	\$20.85	\$0.00	\$68.30

Notes:

** Structural 1:6; Ornamental 1:4

Apprentice to Journeyworker Ratio:**

JACKHAMMER & PAVING BREAKER OPERATOR	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
LABORERS - ZONE 1	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
LABORER	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
LABORERS - ZONE 1	12/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10

Apprentice - LABORER - Zone 1

Effective Date - 06/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$21.51	\$7.45	\$13.80	\$0.00	\$42.76
2	70	\$25.10	\$7.45	\$13.80	\$0.00	\$46.35
3	80	\$28.68	\$7.45	\$13.80	\$0.00	\$49.93
4	90	\$32.27	\$7.45	\$13.80	\$0.00	\$53.52

Effective Date - 12/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$22.11	\$7.45	\$13.80	\$0.00	\$43.36
2	70	\$25.80	\$7.45	\$13.80	\$0.00	\$47.05
3	80	\$29.48	\$7.45	\$13.80	\$0.00	\$50.73
4	90	\$33.17	\$7.45	\$13.80	\$0.00	\$54.42

Notes:

Apprentice to Journeyworker Ratio:1:5

LABORER: CARPENTER TENDER <i>LABORERS - ZONE 1</i>	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
-------------------------------------------------------	------------	---------	--------	---------	--------	---------

For apprentice rates see "Apprentice- LABORER"

LABORER: CEMENT FINISHER TENDER <i>LABORERS - ZONE 1</i>	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
	12/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10

For apprentice rates see "Apprentice- LABORER"

LABORER: HAZARDOUS WASTE/ASBESTOS REMOVER <i>LABORERS - ZONE 1</i>	12/01/2015	\$35.50	\$7.45	\$13.55	\$0.00	\$56.50
-----------------------------------------------------------------------	------------	---------	--------	---------	--------	---------

For apprentice rates see "Apprentice- LABORER"

LABORER: MASON TENDER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

LABORER: MULTI-TRADE TENDER <i>LABORERS - ZONE 1</i>	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
	12/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10

For apprentice rates see "Apprentice- LABORER"

LABORER: TREE REMOVER <i>LABORERS - ZONE 1</i>	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
	12/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10

This classification applies to all tree work associated with the removal of standing trees, and trimming and removal of branches and limbs when the work is not done for a utility company for the purpose of operation, maintenance or repair of utility company equipment. For apprentice rates see "Apprentice- LABORER"

LASER BEAM OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

MARBLE & TILE FINISHERS <i>BRICKLAYERS LOCAL 3 - MARBLE & TILE</i>	08/01/2016	\$38.78	\$10.18	\$17.78	\$0.00	\$66.74
	02/01/2017	\$39.24	\$10.18	\$17.78	\$0.00	\$67.20

Apprentice - MARBLE & TILE FINISHER - Local 3 Marble & Tile

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.39	\$10.18	\$17.78	\$0.00	\$47.35
2	60	\$23.27	\$10.18	\$17.78	\$0.00	\$51.23
3	70	\$27.15	\$10.18	\$17.78	\$0.00	\$55.11
4	80	\$31.02	\$10.18	\$17.78	\$0.00	\$58.98
5	90	\$34.90	\$10.18	\$17.78	\$0.00	\$62.86

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.62	\$10.18	\$17.78	\$0.00	\$47.58
2	60	\$23.54	\$10.18	\$17.78	\$0.00	\$51.50
3	70	\$27.47	\$10.18	\$17.78	\$0.00	\$55.43
4	80	\$31.39	\$10.18	\$17.78	\$0.00	\$59.35
5	90	\$35.32	\$10.18	\$17.78	\$0.00	\$63.28

Notes:

Apprentice to Journeyworker Ratio:1:3

MARBLE MASONS, TILELAYERS & TERRAZZO MECH	08/01/2016	\$50.80	\$10.18	\$19.22	\$0.00	\$80.20
BRICKLAYERS LOCAL 3 - MARBLE & TILE	02/01/2017	\$51.37	\$10.18	\$19.22	\$0.00	\$80.77

Apprentice - MARBLE-TILE-TERRAZZO MECHANIC - Local 3 Marble & Tile

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.40	\$10.18	\$19.22	\$0.00	\$54.80
2	60	\$30.48	\$10.18	\$19.22	\$0.00	\$59.88
3	70	\$35.56	\$10.18	\$19.22	\$0.00	\$64.96
4	80	\$40.64	\$10.18	\$19.22	\$0.00	\$70.04
5	90	\$45.72	\$10.18	\$19.22	\$0.00	\$75.12

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.69	\$10.18	\$19.22	\$0.00	\$55.09
2	60	\$30.82	\$10.18	\$19.22	\$0.00	\$60.22
3	70	\$35.96	\$10.18	\$19.22	\$0.00	\$65.36
4	80	\$41.10	\$10.18	\$19.22	\$0.00	\$70.50
5	90	\$46.23	\$10.18	\$19.22	\$0.00	\$75.63

Notes:

Apprentice to Journeyworker Ratio:1:5

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
MECH. SWEEPER OPERATOR (ON CONST. SITES) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

MECHANICS MAINTENANCE <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

MILLWRIGHT (Zone 1) <i>MILLWRIGHTS LOCAL 1121 - Zone 1</i>	04/01/2015	\$37.64	\$9.80	\$16.21	\$0.00	\$63.65
---------------------------------------------------------------	------------	---------	--------	---------	--------	---------

Apprentice - MILLWRIGHT - Local 1121 Zone 1

Effective Date - 04/01/2015

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	55	\$20.70	\$9.80	\$4.48	\$0.00	\$34.98
2	65	\$24.47	\$9.80	\$13.36	\$0.00	\$47.63
3	75	\$28.23	\$9.80	\$14.18	\$0.00	\$52.21
4	85	\$31.99	\$9.80	\$14.99	\$0.00	\$56.78

Notes:

Steps are 2,000 hours

Apprentice to Journeyworker Ratio:1:5

MORTAR MIXER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

OILER (OTHER THAN TRUCK CRANES,GRADALLS) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$22.41	\$10.00	\$15.15	\$0.00	\$47.56
	12/01/2016	\$23.06	\$10.00	\$15.15	\$0.00	\$48.21
	06/01/2017	\$23.57	\$10.00	\$15.15	\$0.00	\$48.72
	12/01/2017	\$24.09	\$10.00	\$15.15	\$0.00	\$49.24

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

OILER (TRUCK CRANES, GRADALLS) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$26.29	\$10.00	\$15.15	\$0.00	\$51.44
	12/01/2016	\$27.04	\$10.00	\$15.15	\$0.00	\$52.19
	06/01/2017	\$27.64	\$10.00	\$15.15	\$0.00	\$52.79
	12/01/2017	\$28.25	\$10.00	\$15.15	\$0.00	\$53.40

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

OTHER POWER DRIVEN EQUIPMENT - CLASS II <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

PAINTER (BRIDGES/TANKS) <i>PAINTERS LOCAL 35 - ZONE 2</i>	07/01/2016	\$50.46	\$7.85	\$16.10	\$0.00	\$74.41
	01/01/2017	\$51.41	\$7.85	\$16.10	\$0.00	\$75.36

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - PAINTER Local 35 - BRIDGES/TANKS

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.23	\$7.85	\$0.00	\$0.00	\$33.08
2	55	\$27.75	\$7.85	\$3.66	\$0.00	\$39.26
3	60	\$30.28	\$7.85	\$3.99	\$0.00	\$42.12
4	65	\$32.80	\$7.85	\$4.32	\$0.00	\$44.97
5	70	\$35.32	\$7.85	\$14.11	\$0.00	\$57.28
6	75	\$37.85	\$7.85	\$14.44	\$0.00	\$60.14
7	80	\$40.37	\$7.85	\$14.77	\$0.00	\$62.99
8	90	\$45.41	\$7.85	\$15.44	\$0.00	\$68.70

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.71	\$7.85	\$0.00	\$0.00	\$33.56
2	55	\$28.28	\$7.85	\$3.66	\$0.00	\$39.79
3	60	\$30.85	\$7.85	\$3.99	\$0.00	\$42.69
4	65	\$33.42	\$7.85	\$4.32	\$0.00	\$45.59
5	70	\$35.99	\$7.85	\$14.11	\$0.00	\$57.95
6	75	\$38.56	\$7.85	\$14.44	\$0.00	\$60.85
7	80	\$41.13	\$7.85	\$14.77	\$0.00	\$63.75
8	90	\$46.27	\$7.85	\$15.44	\$0.00	\$69.56

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

PAINTER (SPRAY OR SANDBLAST, NEW) *	07/01/2016	\$41.36	\$7.85	\$16.10	\$0.00	\$65.31
* If 30% or more of surfaces to be painted are new construction, NEW paint rate shall be used. PAINTERS LOCAL 35 - ZONE 2	01/01/2017	\$42.31	\$7.85	\$16.10	\$0.00	\$66.26

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - PAINTER Local 35 Zone 2 - Spray/Sandblast - New

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$20.68	\$7.85	\$0.00	\$0.00	\$28.53
2	55	\$22.75	\$7.85	\$3.66	\$0.00	\$34.26
3	60	\$24.82	\$7.85	\$3.99	\$0.00	\$36.66
4	65	\$26.88	\$7.85	\$4.32	\$0.00	\$39.05
5	70	\$28.95	\$7.85	\$14.11	\$0.00	\$50.91
6	75	\$31.02	\$7.85	\$14.44	\$0.00	\$53.31
7	80	\$33.09	\$7.85	\$14.77	\$0.00	\$55.71
8	90	\$37.22	\$7.85	\$15.44	\$0.00	\$60.51

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$21.16	\$7.85	\$0.00	\$0.00	\$29.01
2	55	\$23.27	\$7.85	\$3.66	\$0.00	\$34.78
3	60	\$25.39	\$7.85	\$3.99	\$0.00	\$37.23
4	65	\$27.50	\$7.85	\$4.32	\$0.00	\$39.67
5	70	\$29.62	\$7.85	\$14.11	\$0.00	\$51.58
6	75	\$31.73	\$7.85	\$14.44	\$0.00	\$54.02
7	80	\$33.85	\$7.85	\$14.77	\$0.00	\$56.47
8	90	\$38.08	\$7.85	\$15.44	\$0.00	\$61.37

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

PAINTER (SPRAY OR SANDBLAST, REPAINT)	07/01/2016	\$39.42	\$7.85	\$16.10	\$0.00	\$63.37
PAINTERS LOCAL 35 - ZONE 2	01/01/2017	\$40.37	\$7.85	\$16.10	\$0.00	\$64.32

Apprentice - PAINTER Local 35 Zone 2 - Spray/Sandblast - Repaint

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.71	\$7.85	\$0.00	\$0.00	\$27.56
2	55	\$21.68	\$7.85	\$3.66	\$0.00	\$33.19
3	60	\$23.65	\$7.85	\$3.99	\$0.00	\$35.49
4	65	\$25.62	\$7.85	\$4.32	\$0.00	\$37.79
5	70	\$27.59	\$7.85	\$14.11	\$0.00	\$49.55
6	75	\$29.57	\$7.85	\$14.44	\$0.00	\$51.86
7	80	\$31.54	\$7.85	\$14.77	\$0.00	\$54.16
8	90	\$35.48	\$7.85	\$15.44	\$0.00	\$58.77

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$20.19	\$7.85	\$0.00	\$0.00	\$28.04
2	55	\$22.20	\$7.85	\$3.66	\$0.00	\$33.71
3	60	\$24.22	\$7.85	\$3.99	\$0.00	\$36.06
4	65	\$26.24	\$7.85	\$4.32	\$0.00	\$38.41
5	70	\$28.26	\$7.85	\$14.11	\$0.00	\$50.22
6	75	\$30.28	\$7.85	\$14.44	\$0.00	\$52.57
7	80	\$32.30	\$7.85	\$14.77	\$0.00	\$54.92
8	90	\$36.33	\$7.85	\$15.44	\$0.00	\$59.62

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

PAINTER (TRAFFIC MARKINGS)	06/01/2016	\$35.85	\$7.45	\$13.80	\$0.00	\$57.10
LABORERS - ZONE 1	12/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10

For Apprentice rates see "Apprentice- LABORER"

PAINTER / TAPER (BRUSH, NEW) *	07/01/2016	\$39.96	\$7.85	\$16.10	\$0.00	\$63.91
* If 30% or more of surfaces to be painted are new construction, NEW paint rate shall be used. PAINTERS LOCAL 35 - ZONE 2	01/01/2017	\$40.91	\$7.85	\$16.10	\$0.00	\$64.86

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - PAINTER - Local 35 Zone 2 - BRUSH NEW

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.98	\$7.85	\$0.00	\$0.00	\$27.83
2	55	\$21.98	\$7.85	\$3.66	\$0.00	\$33.49
3	60	\$23.98	\$7.85	\$3.99	\$0.00	\$35.82
4	65	\$25.97	\$7.85	\$4.32	\$0.00	\$38.14
5	70	\$27.97	\$7.85	\$14.11	\$0.00	\$49.93
6	75	\$29.97	\$7.85	\$14.44	\$0.00	\$52.26
7	80	\$31.97	\$7.85	\$14.77	\$0.00	\$54.59
8	90	\$35.96	\$7.85	\$15.44	\$0.00	\$59.25

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$20.46	\$7.85	\$0.00	\$0.00	\$28.31
2	55	\$22.50	\$7.85	\$3.66	\$0.00	\$34.01
3	60	\$24.55	\$7.85	\$3.99	\$0.00	\$36.39
4	65	\$26.59	\$7.85	\$4.32	\$0.00	\$38.76
5	70	\$28.64	\$7.85	\$14.11	\$0.00	\$50.60
6	75	\$30.68	\$7.85	\$14.44	\$0.00	\$52.97
7	80	\$32.73	\$7.85	\$14.77	\$0.00	\$55.35
8	90	\$36.82	\$7.85	\$15.44	\$0.00	\$60.11

Notes:
Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

PAINTER / TAPER (BRUSH, REPAINT)	07/01/2016	\$38.02	\$7.85	\$16.10	\$0.00	\$61.97
PAINTERS LOCAL 35 - ZONE 2	01/01/2017	\$38.97	\$7.85	\$16.10	\$0.00	\$62.92

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - PAINTER Local 35 Zone 2 - BRUSH REPAINT

Effective Date - 07/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.01	\$7.85	\$0.00	\$0.00	\$26.86
2	55	\$20.91	\$7.85	\$3.66	\$0.00	\$32.42
3	60	\$22.81	\$7.85	\$3.99	\$0.00	\$34.65
4	65	\$24.71	\$7.85	\$4.32	\$0.00	\$36.88
5	70	\$26.61	\$7.85	\$14.11	\$0.00	\$48.57
6	75	\$28.52	\$7.85	\$14.44	\$0.00	\$50.81
7	80	\$30.42	\$7.85	\$14.77	\$0.00	\$53.04
8	90	\$34.22	\$7.85	\$15.44	\$0.00	\$57.51

Effective Date - 01/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$19.49	\$7.85	\$0.00	\$0.00	\$27.34
2	55	\$21.43	\$7.85	\$3.66	\$0.00	\$32.94
3	60	\$23.38	\$7.85	\$3.99	\$0.00	\$35.22
4	65	\$25.33	\$7.85	\$4.32	\$0.00	\$37.50
5	70	\$27.28	\$7.85	\$14.11	\$0.00	\$49.24
6	75	\$29.23	\$7.85	\$14.44	\$0.00	\$51.52
7	80	\$31.18	\$7.85	\$14.77	\$0.00	\$53.80
8	90	\$35.07	\$7.85	\$15.44	\$0.00	\$58.36

Notes:

Steps are 750 hrs.

Apprentice to Journeyworker Ratio:1:1

PANEL & PICKUP TRUCKS DRIVER <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.08	\$10.91	\$10.08	\$0.00	\$54.07
	12/01/2016	\$33.08	\$10.91	\$10.89	\$0.00	\$54.88
PIER AND DOCK CONSTRUCTOR (UNDERPINNING AND DECK) <i>PILE DRIVER LOCAL 56 (ZONE 1)</i> For apprentice rates see "Apprentice- PILE DRIVER"	08/01/2015	\$42.04	\$9.80	\$19.23	\$0.00	\$71.07
PILE DRIVER <i>PILE DRIVER LOCAL 56 (ZONE 1)</i>	08/01/2015	\$42.04	\$9.80	\$19.23	\$0.00	\$71.07

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - PILE DRIVER - Local 56 Zone 1

Effective Date - 08/01/2015

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$21.02	\$9.80	\$19.23	\$0.00	\$50.05
2	60	\$25.22	\$9.80	\$19.23	\$0.00	\$54.25
3	70	\$29.43	\$9.80	\$19.23	\$0.00	\$58.46
4	75	\$31.53	\$9.80	\$19.23	\$0.00	\$60.56
5	80	\$33.63	\$9.80	\$19.23	\$0.00	\$62.66
6	80	\$33.63	\$9.80	\$19.23	\$0.00	\$62.66
7	90	\$37.84	\$9.80	\$19.23	\$0.00	\$66.87
8	90	\$37.84	\$9.80	\$19.23	\$0.00	\$66.87

Notes:

Apprentice to Journeyworker Ratio:1:3

PIPEFITTER & STEAMFITTER PIPEFITTERS LOCAL 537	09/01/2016	\$50.19	\$9.70	\$18.14	\$0.00	\$78.03
	03/01/2017	\$51.19	\$9.70	\$18.14	\$0.00	\$79.03

Apprentice - PIPEFITTER - Local 537

Effective Date - 09/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$20.08	\$9.70	\$7.50	\$0.00	\$37.28
2	45	\$22.59	\$9.70	\$18.14	\$0.00	\$50.43
3	60	\$30.11	\$9.70	\$18.14	\$0.00	\$57.95
4	70	\$35.13	\$9.70	\$18.14	\$0.00	\$62.97
5	80	\$40.15	\$9.70	\$18.14	\$0.00	\$67.99

Effective Date - 03/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$20.48	\$9.70	\$7.50	\$0.00	\$37.68
2	45	\$23.04	\$9.70	\$18.14	\$0.00	\$50.88
3	60	\$30.71	\$9.70	\$18.14	\$0.00	\$58.55
4	70	\$35.83	\$9.70	\$18.14	\$0.00	\$63.67
5	80	\$40.95	\$9.70	\$18.14	\$0.00	\$68.79

Notes:
 ** 1:3; 3:15; 1:10 thereafter / Steps are 1 yr.
 Refrig/AC Mechanic **1:1;1:2;2:4;3:6;4:8;5:10;6:12;7:14;8:17;9:20;10:23(Max)

Apprentice to Journeyworker Ratio:**

PIPELAYER LABORERS - ZONE 1	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

PLUMBERS & GASFITTERS PLUMBERS & GASFITTERS LOCAL 12	09/01/2016	\$51.69	\$11.32	\$15.46	\$0.00	\$78.47
	03/01/2017	\$52.69	\$11.32	\$15.46	\$0.00	\$79.47

Apprentice - PLUMBER/GASFITTER - Local 12

Effective Date - 09/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	35	\$18.09	\$11.32	\$5.74	\$0.00	\$35.15
2	40	\$20.68	\$11.32	\$6.49	\$0.00	\$38.49
3	55	\$28.43	\$11.32	\$8.73	\$0.00	\$48.48
4	65	\$33.60	\$11.32	\$10.23	\$0.00	\$55.15
5	75	\$38.77	\$11.32	\$11.72	\$0.00	\$61.81

Effective Date - 03/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	35	\$18.44	\$11.32	\$5.74	\$0.00	\$35.50
2	40	\$21.08	\$11.32	\$6.49	\$0.00	\$38.89
3	55	\$28.98	\$11.32	\$8.73	\$0.00	\$49.03
4	65	\$34.25	\$11.32	\$10.23	\$0.00	\$55.80
5	75	\$39.52	\$11.32	\$11.72	\$0.00	\$62.56

Notes:

** 1:2; 2:6; 3:10; 4:14; 5:19/Steps are 1 yr
Step4 with lic\$58.50 Step5 with lic\$65.36

Apprentice to Journeyworker Ratio:**

PNEUMATIC CONTROLS (TEMP.) <i>PIPEFITTERS LOCAL 537</i>	09/01/2016	\$50.19	\$9.70	\$18.14	\$0.00	\$78.03
------------------------------------------------------------	------------	---------	--------	---------	--------	---------

For apprentice rates see "Apprentice- PIPEFITTER" or "PLUMBER/PIPEFITTER"

PNEUMATIC DRILL/TOOL OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35

For apprentice rates see "Apprentice- LABORER"

POWDERMAN & BLASTER <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.85	\$7.45	\$13.80	\$0.00	\$58.10
	12/01/2016	\$37.85	\$7.45	\$13.80	\$0.00	\$59.10

For apprentice rates see "Apprentice- LABORER"

POWER SHOVEL/DERRICK/TRENCHING MACHINE <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

PUMP OPERATOR (CONCRETE) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

PUMP OPERATOR (DEWATERING, OTHER) <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$30.40	\$10.00	\$15.15	\$0.00	\$55.55
	12/01/2016	\$31.27	\$10.00	\$15.15	\$0.00	\$56.42
	06/01/2017	\$31.96	\$10.00	\$15.15	\$0.00	\$57.11
	12/01/2017	\$32.65	\$10.00	\$15.15	\$0.00	\$57.80

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
READY MIX CONCRETE DRIVERS after 4/30/10 (Drivers Hired After 4/30/2010) <i>TEAMSTERS LOCAL 25c</i>	07/01/2016	\$28.03	\$8.23	\$9.31	\$0.00	\$45.57
	05/01/2017	\$28.18	\$8.23	\$9.72	\$0.00	\$46.13
	07/01/2017	\$28.18	\$8.48	\$9.72	\$0.00	\$46.38
READY-MIX CONCRETE DRIVER <i>TEAMSTERS LOCAL 25c</i>	07/01/2016	\$29.33	\$8.23	\$9.31	\$0.00	\$46.87
	05/01/2017	\$29.48	\$8.23	\$9.72	\$0.00	\$47.43
	07/01/2017	\$29.48	\$8.48	\$9.72	\$0.00	\$47.68
RECLAIMERS <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
RESIDENTIAL WOOD FRAME (All Other Work) <i>CARPENTERS -ZONE 2 (Residential Wood)</i>	04/01/2015	\$25.25	\$9.80	\$16.82	\$0.00	\$51.87
RESIDENTIAL WOOD FRAME CARPENTER ** ** The Residential Wood Frame Carpenter classification applies only to the construction of new, wood frame residences that do not exceed four stories including the basement. <i>CARPENTERS -ZONE 2 (Residential Wood)</i> As of 9/1/09 Carpentry work on wood-frame residential WEATHERIZATION projects shall be paid the RESIDENTIAL WOOD FRAME CARPENTER rate.	04/01/2015	\$25.30	\$7.00	\$6.31	\$0.00	\$38.61

Apprentice - CARPENTER (Residential Wood Frame) - Zone 2

Effective Date - 04/01/2015

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$15.18	\$7.00	\$0.00	\$0.00	\$22.18
2	60	\$15.18	\$7.00	\$0.00	\$0.00	\$22.18
3	65	\$16.45	\$7.00	\$6.31	\$0.00	\$29.76
4	70	\$17.71	\$7.00	\$6.31	\$0.00	\$31.02
5	75	\$18.98	\$7.00	\$6.31	\$0.00	\$32.29
6	80	\$20.24	\$7.00	\$6.31	\$0.00	\$33.55
7	85	\$21.51	\$7.00	\$6.31	\$0.00	\$34.82
8	90	\$22.77	\$7.00	\$6.31	\$0.00	\$36.08

Notes:

Apprentice to Journeyworker Ratio:1:5

RIDE-ON MOTORIZED BUGGY OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
ROLLER/SPREADER/MULCHING MACHINE <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
ROOFER (Inc.Roofer Waterproofing &Roofer Damproofg) ROOFERS LOCAL 33	08/01/2016	\$41.11	\$11.00	\$13.00	\$0.00	\$65.11
	02/01/2017	\$42.26	\$11.00	\$13.00	\$0.00	\$66.26
	08/01/2017	\$43.36	\$11.00	\$13.00	\$0.00	\$67.36
	02/01/2018	\$44.51	\$11.00	\$13.00	\$0.00	\$68.51
	08/01/2018	\$45.61	\$11.00	\$13.00	\$0.00	\$69.61
	02/01/2019	\$46.76	\$11.00	\$13.00	\$0.00	\$70.76

Apprentice - ROOFER - Local 33

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$20.56	\$11.00	\$3.44	\$0.00	\$35.00
2	60	\$24.67	\$11.00	\$13.00	\$0.00	\$48.67
3	65	\$26.72	\$11.00	\$13.00	\$0.00	\$50.72
4	75	\$30.83	\$11.00	\$13.00	\$0.00	\$54.83
5	85	\$34.94	\$11.00	\$13.00	\$0.00	\$58.94

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$21.13	\$11.00	\$3.44	\$0.00	\$35.57
2	60	\$25.36	\$11.00	\$13.00	\$0.00	\$49.36
3	65	\$27.47	\$11.00	\$13.00	\$0.00	\$51.47
4	75	\$31.70	\$11.00	\$13.00	\$0.00	\$55.70
5	85	\$35.92	\$11.00	\$13.00	\$0.00	\$59.92

Notes: ** 1:5, 2:6-10, the 1:10; Reroofing: 1:4, then 1:1
Step 1 is 2000 hrs.; Steps 2-5 are 1000 hrs.

Apprentice to Journeyworker Ratio:**

ROOFER SLATE / TILE / PRECAST CONCRETE ROOFERS LOCAL 33	08/01/2016	\$41.36	\$11.00	\$13.00	\$0.00	\$65.36
	02/01/2017	\$42.51	\$11.00	\$13.00	\$0.00	\$66.51
	08/01/2017	\$43.61	\$11.00	\$13.00	\$0.00	\$67.61
	02/01/2018	\$44.76	\$11.00	\$13.00	\$0.00	\$68.76
	08/01/2018	\$45.86	\$11.00	\$13.00	\$0.00	\$69.86
	02/01/2019	\$47.01	\$11.00	\$13.00	\$0.00	\$71.01

For apprentice rates see "Apprentice- ROOFER"

SHEETMETAL WORKER SHEETMETAL WORKERS LOCAL 17 - A	08/01/2016	\$43.31	\$10.70	\$23.07	\$2.31	\$79.39
	02/01/2017	\$44.41	\$10.70	\$23.07	\$2.31	\$80.49
	08/01/2017	\$45.51	\$10.70	\$23.07	\$2.31	\$81.59
	02/01/2018	\$46.66	\$10.70	\$23.07	\$2.31	\$82.74

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - SHEET METAL WORKER - Local 17-A

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$17.32	\$10.70	\$5.24	\$0.00	\$33.26
2	40	\$17.32	\$10.70	\$5.24	\$0.00	\$33.26
3	45	\$19.49	\$10.70	\$10.31	\$1.21	\$41.71
4	45	\$19.49	\$10.70	\$10.31	\$1.21	\$41.71
5	50	\$21.66	\$10.70	\$11.21	\$1.31	\$44.88
6	50	\$21.66	\$10.70	\$11.46	\$1.31	\$45.13
7	60	\$25.99	\$10.70	\$13.02	\$1.49	\$51.20
8	65	\$28.15	\$10.70	\$13.93	\$1.58	\$54.36
9	75	\$32.48	\$10.70	\$15.74	\$1.77	\$60.69
10	85	\$36.81	\$10.70	\$17.05	\$1.94	\$66.50

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$17.76	\$10.70	\$5.24	\$0.00	\$33.70
2	40	\$17.76	\$10.70	\$5.24	\$0.00	\$33.70
3	45	\$19.98	\$10.70	\$10.31	\$1.23	\$42.22
4	45	\$19.98	\$10.70	\$10.31	\$1.23	\$42.22
5	50	\$22.21	\$10.70	\$11.21	\$1.32	\$45.44
6	50	\$22.21	\$10.70	\$11.46	\$1.33	\$45.70
7	60	\$26.65	\$10.70	\$13.02	\$1.51	\$51.88
8	65	\$28.87	\$10.70	\$13.93	\$1.61	\$55.11
9	75	\$33.31	\$10.70	\$15.74	\$1.79	\$61.54
10	85	\$37.75	\$10.70	\$17.05	\$1.97	\$67.47

Notes:
Steps are 6 mos.

Apprentice to Journeyworker Ratio:1:4

SIGN ERECTOR PAINTERS LOCAL 35 - ZONE 2	06/01/2013	\$25.81	\$7.07	\$7.05	\$0.00	\$39.93
--------------------------------------------	------------	---------	--------	--------	--------	---------

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - SIGN ERECTOR - Local 35 Zone 2

Effective Date - 06/01/2013

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$12.91	\$7.07	\$0.00	\$0.00	\$19.98
2	55	\$14.20	\$7.07	\$2.45	\$0.00	\$23.72
3	60	\$15.49	\$7.07	\$2.45	\$0.00	\$25.01
4	65	\$16.78	\$7.07	\$2.45	\$0.00	\$26.30
5	70	\$18.07	\$7.07	\$7.05	\$0.00	\$32.19
6	75	\$19.36	\$7.07	\$7.05	\$0.00	\$33.48
7	80	\$20.65	\$7.07	\$7.05	\$0.00	\$34.77
8	85	\$21.94	\$7.07	\$7.05	\$0.00	\$36.06
9	90	\$23.23	\$7.07	\$7.05	\$0.00	\$37.35

Notes:
Steps are 4 mos.

Apprentice to Journeyworker Ratio:1:1

SPECIALIZED EARTH MOVING EQUIP < 35 TONS <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.54	\$10.91	\$10.08	\$0.00	\$54.53
	12/01/2016	\$33.54	\$10.91	\$10.89	\$0.00	\$55.34
SPECIALIZED EARTH MOVING EQUIP > 35 TONS <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.83	\$10.91	\$10.08	\$0.00	\$54.82
	12/01/2016	\$33.83	\$10.91	\$10.89	\$0.00	\$55.63
SPRINKLER FITTER <i>SPRINKLER FITTERS LOCAL 550 - (Section A) Zone 1</i>	03/01/2016	\$54.43	\$8.67	\$16.80	\$0.00	\$79.90
	10/01/2016	\$55.53	\$8.67	\$16.80	\$0.00	\$81.00
	03/01/2017	\$56.53	\$8.67	\$16.80	\$0.00	\$82.00

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - SPRINKLER FITTER - Local 550 (Section A) Zone 1

Effective Date - 03/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	35	\$19.05	\$8.67	\$8.55	\$0.00	\$36.27
2	40	\$21.77	\$8.67	\$8.55	\$0.00	\$38.99
3	45	\$24.49	\$8.67	\$8.55	\$0.00	\$41.71
4	50	\$27.22	\$8.67	\$8.55	\$0.00	\$44.44
5	55	\$29.94	\$8.67	\$8.55	\$0.00	\$47.16
6	60	\$32.66	\$8.67	\$8.55	\$0.00	\$49.88
7	65	\$35.38	\$8.67	\$8.55	\$0.00	\$52.60
8	70	\$38.10	\$8.67	\$8.55	\$0.00	\$55.32
9	75	\$40.82	\$8.67	\$8.55	\$0.00	\$58.04
10	80	\$43.54	\$8.67	\$8.55	\$0.00	\$60.76

Effective Date - 10/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	35	\$19.44	\$8.67	\$8.55	\$0.00	\$36.66
2	40	\$22.21	\$8.67	\$8.55	\$0.00	\$39.43
3	45	\$24.99	\$8.67	\$8.55	\$0.00	\$42.21
4	50	\$27.77	\$8.67	\$8.55	\$0.00	\$44.99
5	55	\$30.54	\$8.67	\$8.55	\$0.00	\$47.76
6	60	\$33.32	\$8.67	\$8.55	\$0.00	\$50.54
7	65	\$36.09	\$8.67	\$8.55	\$0.00	\$53.31
8	70	\$38.87	\$8.67	\$8.55	\$0.00	\$56.09
9	75	\$41.65	\$8.67	\$8.55	\$0.00	\$58.87
10	80	\$44.42	\$8.67	\$8.55	\$0.00	\$61.64

Notes: Apprentice entered prior 9/30/10:
40/45/50/55/60/65/70/75/80/85
Steps are 850 hours

Apprentice to Journeyworker Ratio:1:3

STEAM BOILER OPERATOR <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

TAMPERS, SELF-PROPELLED OR TRACTOR DRAWN <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17

For apprentice rates see "Apprentice- OPERATING ENGINEERS"

TELECOMMUNICATION TECHNICIAN <i>ELECTRICIANS LOCAL 103</i>	03/01/2016	\$34.63	\$13.00	\$14.55	\$0.00	\$62.18
----------------------------------------------------------------------	------------	---------	---------	---------	--------	---------

Classification

Effective Date Base Wage Health Pension Supplemental Unemployment Total Rate

Apprentice - TELECOMMUNICATION TECHNICIAN - Local 103

Effective Date - 03/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	40	\$13.85	\$13.00	\$0.42	\$0.00	\$27.27
2	40	\$13.85	\$13.00	\$0.42	\$0.00	\$27.27
3	45	\$15.58	\$13.00	\$11.52	\$0.00	\$40.10
4	45	\$15.58	\$13.00	\$11.52	\$0.00	\$40.10
5	50	\$17.32	\$13.00	\$11.79	\$0.00	\$42.11
6	55	\$19.05	\$13.00	\$12.06	\$0.00	\$44.11
7	60	\$20.78	\$13.00	\$12.34	\$0.00	\$46.12
8	65	\$22.51	\$13.00	\$12.62	\$0.00	\$48.13
9	70	\$24.24	\$13.00	\$12.90	\$0.00	\$50.14
10	75	\$25.97	\$13.00	\$13.17	\$0.00	\$52.14

Notes:

Apprentice to Journeyworker Ratio:1:1

TERRAZZO FINISHERS	08/01/2016	\$49.70	\$10.18	\$19.22	\$0.00	\$79.10
BRICKLAYERS LOCAL 3 - MARBLE & TILE	02/01/2017	\$50.27	\$10.18	\$19.22	\$0.00	\$79.67

Apprentice - TERRAZZO FINISHER - Local 3 Marble & Tile

Effective Date - 08/01/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$24.85	\$10.18	\$19.22	\$0.00	\$54.25
2	60	\$29.82	\$10.18	\$19.22	\$0.00	\$59.22
3	70	\$34.79	\$10.18	\$19.22	\$0.00	\$64.19
4	80	\$39.76	\$10.18	\$19.22	\$0.00	\$69.16
5	90	\$44.73	\$10.18	\$19.22	\$0.00	\$74.13

Effective Date - 02/01/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	50	\$25.14	\$10.18	\$19.22	\$0.00	\$54.54
2	60	\$30.16	\$10.18	\$19.22	\$0.00	\$59.56
3	70	\$35.19	\$10.18	\$19.22	\$0.00	\$64.59
4	80	\$40.22	\$10.18	\$19.22	\$0.00	\$69.62
5	90	\$45.24	\$10.18	\$19.22	\$0.00	\$74.64

Notes:

Apprentice to Journeyworker Ratio:1:3

TEST BORING DRILLER	06/01/2016	\$37.20	\$7.45	\$14.00	\$0.00	\$58.65
LABORERS - FOUNDATION AND MARINE	12/01/2016	\$38.20	\$7.45	\$14.00	\$0.00	\$59.65

For apprentice rates see "Apprentice- LABORER"

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
TEST BORING DRILLER HELPER <i>LABORERS - FOUNDATION AND MARINE</i>	06/01/2016	\$35.92	\$7.45	\$14.00	\$0.00	\$57.37
	12/01/2016	\$36.92	\$7.45	\$14.00	\$0.00	\$58.37
For apprentice rates see "Apprentice- LABORER"						
TEST BORING LABORER <i>LABORERS - FOUNDATION AND MARINE</i>	06/01/2016	\$35.80	\$7.45	\$14.00	\$0.00	\$57.25
	12/01/2016	\$36.80	\$7.45	\$14.00	\$0.00	\$58.25
For apprentice rates see "Apprentice- LABORER"						
TRACTORS/PORTABLE STEAM GENERATORS <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$43.81	\$10.00	\$15.15	\$0.00	\$68.96
	12/01/2016	\$45.04	\$10.00	\$15.15	\$0.00	\$70.19
	06/01/2017	\$46.03	\$10.00	\$15.15	\$0.00	\$71.18
	12/01/2017	\$47.02	\$10.00	\$15.15	\$0.00	\$72.17
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
TRAILERS FOR EARTH MOVING EQUIPMENT <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$34.12	\$10.91	\$10.08	\$0.00	\$55.11
	12/01/2016	\$34.12	\$10.91	\$10.89	\$0.00	\$55.92
TUNNEL WORK - COMPRESSED AIR <i>LABORERS (COMPRESSED AIR)</i>	06/01/2016	\$48.08	\$7.45	\$14.40	\$0.00	\$69.93
	12/01/2016	\$49.08	\$7.45	\$14.40	\$0.00	\$70.93
For apprentice rates see "Apprentice- LABORER"						
TUNNEL WORK - COMPRESSED AIR (HAZ. WASTE) <i>LABORERS (COMPRESSED AIR)</i>	06/01/2016	\$50.08	\$7.45	\$14.40	\$0.00	\$71.93
	12/01/2016	\$51.08	\$7.45	\$14.40	\$0.00	\$72.93
For apprentice rates see "Apprentice- LABORER"						
TUNNEL WORK - FREE AIR <i>LABORERS (FREE AIR TUNNEL)</i>	06/01/2016	\$40.15	\$7.45	\$14.40	\$0.00	\$62.00
	12/01/2016	\$41.15	\$7.45	\$14.40	\$0.00	\$63.00
For apprentice rates see "Apprentice- LABORER"						
TUNNEL WORK - FREE AIR (HAZ. WASTE) <i>LABORERS (FREE AIR TUNNEL)</i>	06/01/2016	\$42.15	\$7.45	\$14.40	\$0.00	\$64.00
	12/01/2016	\$43.15	\$7.45	\$14.40	\$0.00	\$65.00
For apprentice rates see "Apprentice- LABORER"						
VAC-HAUL <i>TEAMSTERS JOINT COUNCIL NO. 10 ZONE A</i>	08/01/2016	\$33.54	\$10.91	\$10.08	\$0.00	\$54.53
	12/01/2016	\$33.54	\$10.91	\$10.89	\$0.00	\$55.34
WAGON DRILL OPERATOR <i>LABORERS - ZONE 1</i>	06/01/2016	\$36.10	\$7.45	\$13.80	\$0.00	\$57.35
	12/01/2016	\$37.10	\$7.45	\$13.80	\$0.00	\$58.35
For apprentice rates see "Apprentice- LABORER"						
WASTE WATER PUMP OPERATOR <i>OPERATING ENGINEERS LOCAL 4</i>	06/01/2016	\$44.23	\$10.00	\$15.15	\$0.00	\$69.38
	12/01/2016	\$45.48	\$10.00	\$15.15	\$0.00	\$70.63
	06/01/2017	\$46.48	\$10.00	\$15.15	\$0.00	\$71.63
	12/01/2017	\$47.48	\$10.00	\$15.15	\$0.00	\$72.63
For apprentice rates see "Apprentice- OPERATING ENGINEERS"						
WATER METER INSTALLER <i>PLUMBERS & GASFITTERS LOCAL 12</i>	09/01/2016	\$51.69	\$11.32	\$15.46	\$0.00	\$78.47
	03/01/2017	\$52.69	\$11.32	\$15.46	\$0.00	\$79.47
For apprentice rates see "Apprentice- PLUMBER/PIPEFITTER" or "PLUMBER/GASFITTER"						
Outside Electrical - East						
CABLE TECHNICIAN (Power Zone) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$26.61	\$7.50	\$1.80	\$0.00	\$35.91
	09/03/2017	\$27.14	\$7.75	\$1.81	\$0.00	\$36.70
For apprentice rates see "Apprentice- LINEMAN"						
CABLEMAN (Underground Ducts & Cables) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$37.70	\$7.50	\$8.87	\$0.00	\$54.07
	09/03/2017	\$38.45	\$7.75	\$9.53	\$0.00	\$55.73
For apprentice rates see "Apprentice- LINEMAN"						
DRIVER / GROUNDMAN CDL <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$31.05	\$7.50	\$8.89	\$0.00	\$47.44
	09/03/2017	\$31.66	\$7.75	\$9.44	\$0.00	\$48.85
For apprentice rates see "Apprentice- LINEMAN"						

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
DRIVER / GROUNDMAN -Inexperienced (<2000 Hrs) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$24.39	\$7.50	\$1.73	\$0.00	\$33.62
	09/03/2017	\$24.88	\$7.75	\$1.75	\$0.00	\$34.38
For apprentice rates see "Apprentice- LINEMAN"						
EQUIPMENT OPERATOR (Class A CDL) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$37.70	\$7.50	\$12.95	\$0.00	\$58.15
	09/03/2017	\$38.45	\$7.75	\$13.61	\$0.00	\$59.81
For apprentice rates see "Apprentice- LINEMAN"						
EQUIPMENT OPERATOR (Class B CDL) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$33.26	\$7.50	\$9.63	\$0.00	\$50.39
	09/03/2017	\$33.92	\$7.75	\$10.21	\$0.00	\$51.88
For apprentice rates see "Apprentice- LINEMAN"						
GROUNDMAN <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$24.39	\$7.50	\$1.73	\$0.00	\$33.62
	09/03/2017	\$24.88	\$7.75	\$1.75	\$0.00	\$34.38
For apprentice rates see "Apprentice- LINEMAN"						
GROUNDMAN -Inexperienced (<2000 Hrs.) <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$19.96	\$7.50	\$1.60	\$0.00	\$29.06
	09/03/2017	\$20.35	\$7.75	\$1.61	\$0.00	\$29.71
For apprentice rates see "Apprentice- LINEMAN"						
JOURNEYMAN LINEMAN <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	08/28/2016	\$44.35	\$7.50	\$15.83	\$0.00	\$67.68
	09/03/2017	\$45.23	\$7.75	\$16.61	\$0.00	\$69.59

Apprentice - LINEMAN (Outside Electrical) - East Local 104

Effective Date - 08/28/2016

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$26.61	\$7.50	\$3.30	\$0.00	\$37.41
2	65	\$28.83	\$7.50	\$3.36	\$0.00	\$39.69
3	70	\$31.05	\$7.50	\$3.43	\$0.00	\$41.98
4	75	\$33.26	\$7.50	\$5.00	\$0.00	\$45.76
5	80	\$35.48	\$7.50	\$5.06	\$0.00	\$48.04
6	85	\$37.70	\$7.50	\$5.13	\$0.00	\$50.33
7	90	\$39.92	\$7.50	\$7.20	\$0.00	\$54.62

Effective Date - 09/03/2017

Step	percent	Apprentice Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
1	60	\$27.14	\$7.75	\$3.31	\$0.00	\$38.20
2	65	\$29.40	\$7.75	\$3.38	\$0.00	\$40.53
3	70	\$31.66	\$7.75	\$3.45	\$0.00	\$42.86
4	75	\$33.92	\$7.75	\$5.02	\$0.00	\$46.69
5	80	\$36.18	\$7.75	\$5.09	\$0.00	\$49.02
6	85	\$38.45	\$7.75	\$5.15	\$0.00	\$51.35
7	90	\$40.71	\$7.75	\$7.22	\$0.00	\$55.68

Notes:

Apprentice to Journeyworker Ratio:1:2

TELEDATA CABLE SPLICER <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	01/01/2016	\$28.98	\$4.25	\$3.12	\$0.00	\$36.35
TELEDATA LINEMAN/EQUIPMENT OPERATOR <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	01/01/2016	\$27.31	\$4.25	\$3.07	\$0.00	\$34.63

Classification	Effective Date	Base Wage	Health	Pension	Supplemental Unemployment	Total Rate
TELEDATA WIREMAN/INSTALLER/TECHNICIAN <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	01/01/2016	\$27.31	\$4.25	\$3.07	\$0.00	\$34.63
TREE TRIMMER <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	01/31/2016	\$18.51	\$3.55	\$0.00	\$0.00	\$22.06
This classification applies only to tree work done: (a) for a utility company, R.E.A. cooperative, or railroad or coal mining company, and (b) for the purpose of operating, maintaining, or repairing the utility company's equipment, and (c) by a person who is using hand or mechanical cutting methods and is not on the ground. This classification does not apply to wholesale tree removal.						
TREE TRIMMER GROUNDMAN <i>OUTSIDE ELECTRICAL WORKERS - EAST LOCAL 104</i>	01/31/2016	\$16.32	\$3.55	\$0.00	\$0.00	\$19.87
This classification applies only to tree work done: (a) for a utility company, R.E.A. cooperative, or railroad or coal mining company, and (b) for the purpose of operating, maintaining, or repairing the utility company's equipment, and (c) by a person who is using hand or mechanical cutting methods and is on the ground. This classification does not apply to wholesale tree removal.						

Additional Apprentices Information:

Minimum wage rates for apprentices employed on public works projects are listed above as a percentage of the pre-determined hourly wage rate established by the Commissioner under the provisions of the M.G.L. c. 149, ss. 26-27D. Apprentices ratios are established by the Division of Apprenticeship Training pursuant to M.G.L. c. 23, ss. 11E-11L.

All apprentices must be registered with the Division of Apprenticeship Training in accordance with M.G.L. c. 23, ss. 11E-11L.

All steps are six months (1000 hours.)

Ratios are expressed in allowable number of apprentices to journeymen or fraction thereof, unless otherwise specified.

** Multiple ratios are listed in the comment field.

*** APP to JM; 1:1, 2:2, 2:3, 3:4, 4:4, 4:5, 4:6, 5:7, 6:7, 6:8, 6:9, 7:10, 8:10, 8:11, 8:12, 9:13, 10:13, 10:14, etc.

**** APP to JM; 1:1, 1:2, 2:3, 2:4, 3:5, 4:6, 4:7, 5:8, 6:9, 6:10, 7:11, 8:12, 8:13, 9:14, 10:15, 10:16, etc.

SECTION 101426
POST AND PANEL SIGN

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
 - 1. Granite posts and panel sign for Arlington Welcome Sign.
 - 2. Sign post footings.
- B. Related Sections:
 - 1. Division 32 Section "Granite Paver Bands"
 - 2. Division 32 Section "Plants"

1.3 DEFINITIONS

- A. ADA-ABA Accessibility Guidelines: U.S. Architectural & Transportation Barriers Compliance Board's "Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines."
- B. ASTM: American Society for Testing and Materials.
- C. AISI: American Steel and Iron Institute.
- D. AWS: American Welding Society.
 - 1. D1.1 Structural Welding Code

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Show fabrication and installation details for post and panel signage.
 - 1. Include plans, elevations, sections, details, and attachments to other work.
 - 2. Provide graphics.
 - a. Include full-size template of Arlington Welcome Sign graphic for approval.
 - 3. For installed products indicated to comply with design loads, include structural analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

- C. Samples for Verification: For each of the following products and for the full range of color, texture, and sign material indicated, of sizes indicated:
 - 1. Sign Panel
 - 2. Granite post
- D. Qualification Data: For Installer.
- E. Maintenance Data: For signs to include in maintenance manuals.
- F. Warranty: Special warranty specified in this Section.

1.5 QUALITY ASSURANCE

- A. Regulatory Requirements:
 - 1. Comply with materials, workmanship, and other applicable requirements of the Commonwealth of Massachusetts Department of Transportation Highway Division, Standard Specifications for Highways and Bridges, latest edition, hereinafter referred to as the Standard Specifications.
 - a. Measurement and payment provisions and safety program submittals included in standard specifications do not apply to this Section.
 - 2. Comply with materials, workmanship, and other applicable requirements of the *Manual on Uniform Traffic Control Devices*, U.S. Dept. of Transportation, latest edition.
 - 3. All Work on accessible routes and parking shall comply with the requirements of the Americans with Disabilities Act (ADA), the Massachusetts Architectural Access Board (MAAB), and local accessibility codes. If code requirements cannot be met during Project layout, notify Architect before proceeding.
 - 4. All work shall comply with the Massachusetts Building Code, latest edition, and local municipalities having jurisdiction.
- B. Installer Qualifications:
 - 1. Installer shall be capable of providing and installing granite posts and sign panel in roadway right-of-ways per regulations of municipalities having jurisdiction.
- C. Source Limitations for Signs: Obtain each sign type indicated from one source from a single manufacturer.

1.6 PROJECT CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit installation of signs to be performed according to manufacturers' written instructions and warranty requirements.
- B. Field Measurements: Indicate measurements on Shop Drawings.
- C. Coordinate signage and police detail as required to create safe working conditions for delivery and construction crews, pedestrians and motorists.

1.7 COORDINATION

- A. Coordinate installation of anchorages for post and panel signage. Furnish setting drawings, templates, and directions for installing anchorages and other items that are to be embedded in concrete.
- B. Contractor shall coordinate the delivery and installation of granite posts and the fabrication, delivery and securement of sign panel.
- C. Contractor shall seek approvals of Owner's representative.

1.8 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of post and panel signs that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Deterioration of finishes beyond normal weathering.
 - b. Deterioration of graphic image.
 - 2. Warranty Period: Five years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 SIGN

- A. Materials for signs, and hardware shall meet or exceed requirements of the Standard Specifications Section 828, Traffic Signs.
- B. Sign Panel shall be 2" thick single sided V-carved signfoam panel. Background paint to be satin finish urethane, cardinal red as approved by Owner. Copy to be hand-painted with reflective beads, silver as approved by Owner. Sign to be provided with 1/4" aluminum flat stock around sides for mounting. Dimensions as indicated on Drawings.
- C. Sign Graphic: "Welcome to" shall be Palatino Linotype italic upper and lower case and "ARLINGTON" shall be Palatino Linotype roman upper case. Text layout and size as indicated on the Drawings. Graphic designer shall take care to space out characters (especially upper case characters) so that the space between characters appears regular.
- D. All hardware shall be hot dipped galvanized in accordance with ASTM A153, or other weather-proof coatings and vandal-resistant fasteners approved by the Owner's representative.

2.2 POSTS AND FOOTINGS

- A. Granite posts:
 - 1. Color: Woodbury Grey, Stanstead Grey, or approved equal.

2. Finish: 2 sides thermal; 2 sides rock face
 3. Dimensions: 8" x 8" x 10'-0"
- B. Concrete shall be 4000 psi conforming to Section M4 of *Standard Specifications*.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. Owner's representative shall approve location of signs in field after rough grading is complete.

3.2 INSTALLATION

- A. Excavation: Excavate for sign foundation to elevations and dimensions indicated. Reconstruct subgrade that is not firm, undisturbed, or compacted soil, or that is damaged by freezing temperatures, frost, rain, accumulated water, or construction activities by excavating a further 12 inches (300 mm), backfilling with satisfactory soil, and compacting to original subgrade elevation.
- B. Set anchor bolts and other embedded items required for installation of signs. Use templates furnished by suppliers of items to be attached.
 1. Protect portion of posts above ground from concrete splatter.
- C. Locate signs and accessories where indicated, using mounting methods of types described and complying with manufacturer's written instructions.
 1. Install signs level, plumb, and at heights indicated, with sign surfaces free of distortion and other defects in appearance.
 2. Mechanical Fasteners: Use nonremovable mechanical fasteners placed through predrilled holes. Attach signs with fasteners and anchors suitable for secure attachment to substrate as recommended in writing by sign manufacturer.

3.3 CLEANING AND PROTECTION

- A. After installation, clean soiled sign surfaces according to manufacturer's or fabricator's written instructions. Protect signs from damage until acceptance by Owner.

END OF SECTION 101426

SECTION 321400
GRANITE PAVER BANDS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Granite pavers
- B. Related Sections:
 - 1. Division 10 Section "Post and Panel Signage"
 - 2. Division 32 Section "Plants"

1.3 SUBMITTALS

- A. Samples for Initial Selection: For the following:
 - 1. Granite pavers.

1.4 QUALITY ASSURANCE

- A. Source Limitations: Obtain each type of stone from single source with resources to provide materials and products of consistent quality in appearance and physical properties.
- B. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.
- C. Preinstallation Conference: Conduct conference at Project site.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store pavers on elevated platforms in a dry location. If units are not stored in an enclosed location, cover tops and sides of stacks with waterproof sheeting, securely tied.
- B. Store aggregates where grading and other required characteristics can be maintained and contamination avoided.

1.6 PROJECT CONDITIONS

- A. Cold-Weather Protection: Do not use frozen materials or materials mixed or coated with ice or frost. Do not build on frozen subgrade or setting beds. Remove and replace unit paver work damaged by frost or freezing.
- B. Coordinate paving and police detail as required to create safe working conditions for delivery and construction crews, pedestrians and motorists.

PART 2 - PRODUCTS

2.1 Granite Pavers

- A. Stone Pavers:
 - 1. Color and Grain: Woodbury Grey, Stanstead Grey, or approved equal.
 - 2. Finish: thermal top, sawn sides.
 - 3. Match Architect's samples for color, finish, and other stone characteristics relating to aesthetic effects.
 - 4. Thickness:
 - a. Paver: Not less than 1.5 inches unless otherwise indicated.
 - 5. Face Size:
 - a. Paver: Minimum size +/- 1 foot by 1 foot.

2.2 AGGREGATE SETTING-BED MATERIALS

- A. Crushed Stone; Graded Aggregate for Subbase: Sound, crushed stone or gravel complying with ASTM D 448 for Size No. 57.
- B. Crusher Run; Graded Aggregate for Base: Sound, crushed stone or gravel complying with ASTM D 448 for Size No. 8.
- C. Stonedust; Stone Screenings for Leveling Course: Sound stone screenings complying with ASTM D 448 for Size No. 10.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas indicated to receive pavers, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

- A. Do not use unit pavers with chips, cracks, voids, discolorations, or other defects that might be visible or cause staining in finished work.

- B. Mix pavers from several pallets or cubes, as they are placed, to produce uniform blend of colors and textures.
- C. Joint Pattern: Butt tight.
- D. Tolerances: Do not exceed 1/4 inch in 10 feet from level, or indicated slope, for finished surface of paving.

3.3 AGGREGATE SETTING-BED APPLICATIONS

- A. Compact soil subgrade uniformly to at least 95 percent of ASTM D 698 laboratory density.
- B. Place aggregate base, compact by tamping with plate vibrator, and screed to depth indicated.
- C. Place leveling course and screed to a thickness of 1 inch, taking care that moisture content remains constant and density is loose and uniform until pavers are set and compacted.
- D. Set pavers butt tight, being careful not to disturb leveling base.
- E. Vibrate pavers into leveling course with a low-amplitude plate vibrator capable of a 3500- to 5000-lbf compaction force at 80 to 90 Hz. Use vibrator with neoprene mat on face of plate or other means as needed to prevent cracking and chipping of pavers. Perform at least three passes across paving with vibrator.
 - 1. Before ending each day's work and when rain interrupts work, cover pavers that have not been compacted and cover leveling course on which pavers have not been placed with nonstaining plastic sheets to protect them from rain.

3.4 REPAIRING AND CLEANING

- A. Remove and replace pavers that are loose, chipped, broken, stained, or otherwise damaged or that do not match adjoining units. Provide new pavers to match adjoining units and install in same manner as original units, with same joint treatment and with no evidence of replacement.
- B. Cleaning: Wash pavers.

END OF SECTION 321400

SECTION 321401
STEEL EDGE RESTRAINT

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Steel edge restraint.
- B. Related Sections:
 - 1. Division 32 Section "Turf and Grasses"
 - 2. Division 32 Section "Plants"

1.3 SUBMITTALS

- A. Product Data: For materials other than water and aggregates.
- B. Product Data: For the following:
 - 1. Steel edge restraint.
- C. Samples for Verification:
 - 1. Steel edge restraint.

1.4 QUALITY ASSURANCE

- A. Mockups: Build mockups to verify selections made under Sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.
 - 1. Approved mockups may become part of the completed Work if undisturbed at time of Substantial Completion.
- B. Preinstallation Conference: Conduct conference at Project site. Edge restraint to be installed after Arlington Welcome Sign and grading and before granite pavers, planting and turf installation.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store edge restraints so that surfaces are not scratched or lengths bent.

1.6 PROJECT CONDITIONS

- A. Cold-Weather Protection: Do not build on frozen subgrade or setting beds.

PART 2 - PRODUCTS

2.1 STEEL EDGE RESTRAINT

- A. Steel Edge Restraints: Manufacturer's standard painted steel edging 3/16 inch (4.8 mm) thick by 4 inches by 16' long with loops pressed from or welded to face to receive stakes at 36 inches o.c., and steel stakes 15 inches long for each loop.
 - 1. Color: Black.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas indicated to receive edge restraint, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance. Adjust grade as required to achieve finished grade. Stake layout of steel edge and obtain approval of layout and grade from Owner's Representative.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Proof-roll prepared subgrade according to requirements in Division 31 Section "Earth Moving" to identify soft pockets and areas of excess yielding. Proceed with installation only after deficient subgrades have been corrected and are ready to receive edge restraint.

3.3 INSTALLATION, GENERAL

- A. Provide edge restraints as indicated. Install edge restraints before placing unit pavers.
 - 1. Install edge restraints to comply with manufacturer's written instructions. Install stakes at intervals required to hold edge restraint in place.
 - 2. Follow manufacturer's written instructions to form radius. Radius shall be constructed of as few lengths of metal as possible.
 - 3. Top of edge restraint to be level with finish grade (soil); position edge restraint and drive stakes accordingly. Edge restraint shall not be visible when grass germinates.
 - 4. Protect finish of edge restraint; do not damage by hammering or other use of tools.

END OF SECTION 321400

SECTION 329200
TURF AND GRASSES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Lawn hydroseeding.

- B. Related Sections:

- 1. Division 32 Section "Steel Edge Restraint"
 - 2. Division 32 Section "Plants"

1.3 DEFINITIONS

- A. Duff Layer: The surface layer of native topsoil that is composed of mostly decayed leaves, twigs, and detritus.
- B. Finish Grade: Elevation of finished surface of planting soil.
- C. Manufactured Topsoil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- D. Pesticide: A substance or mixture intended for preventing, destroying, repelling, or mitigating a pest. This includes insecticides, miticides, herbicides, fungicides, rodenticides, and molluscicides. It also includes substances or mixtures intended for use as a plant regulator, defoliant, or desiccant.
- E. Pests: Living organisms that occur where they are not desired or that cause damage to plants, animals, or people. These include insects, mites, grubs, mollusks (snails and slugs), rodents (gophers, moles, and mice), unwanted plants (weeds), fungi, bacteria, and viruses.
- F. Planting Soil: Standardized topsoil; existing, native surface topsoil; existing, in-place surface soil; imported topsoil; or manufactured topsoil that is modified with soil amendments and perhaps fertilizers to produce a soil mixture best for plant growth.
- G. Subgrade: Surface or elevation of subsoil remaining after excavation is complete, or top surface of a fill or backfill before planting soil is placed.

- H. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.
- I. Surface Soil: Soil that is present at the top layer of the existing soil profile at the Project site. In undisturbed areas, the surface soil is typically topsoil, but in disturbed areas such as urban environments, the surface soil can be subsoil.

1.4 SUBMITTALS

- A. Certification of Grass Seed: From seed vendor for each grass-seed monostand or mixture stating the botanical and common name, percentage by weight of each species and variety, and percentage of purity, germination, and weed seed. Include the year of production and date of packaging.
- B. Qualification Data: For qualified landscape Installer.
- C. Product Certificates:
 - 1. For soil amendments from manufacturer.
 - 2. For erosion control blanket.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified landscape Installer whose work has resulted in successful turf establishment.
 - 1. Professional Membership: Installer shall be a member in good standing of either the Professional Landcare Network or the American Nursery and Landscape Association.
 - 2. Experience: Five years' experience in turf installation in addition to requirements in Division 01 Section "Quality Requirements."
 - 3. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when work is in progress.
 - 4. Personnel Certifications: Installer's field supervisor shall have certification in the following categories from the Professional Landcare Network:
 - a. Certified Landscape Technician - Exterior, with installation specialty area(s), designated CLT-Exterior.
 - b. Certified Turfgrass Professional of Cool Season Lawns, designated CTP-CSL.
- B. Preinstallation Conference: Conduct conference at Project site.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Seed and Other Packaged Materials: Deliver packaged materials in original, unopened containers showing weight, certified analysis, name and address of manufacturer, and indication of conformance with state and federal laws, as applicable.
- B. Bulk Materials:
 - 1. Do not dump or store bulk materials near structures, utilities, walkways and pavements, or on existing turf areas or plants.

2. Provide erosion-control measures to prevent erosion or displacement of bulk materials, discharge of soil-bearing water runoff, and airborne dust reaching adjacent properties, water conveyance systems, or walkways.
3. Accompany each delivery of bulk fertilizers and soil amendments with appropriate certificates.

1.7 PROJECT CONDITIONS

- A. Planting Restrictions: Plant during one of the following periods. Coordinate planting periods with initial maintenance periods to provide required maintenance from date of planting completion.
 1. Spring Planting: April 1 to June 1.
 2. Fall Planting: August 15 to September 30.
- B. Weather Limitations: Proceed with planting only when existing and forecasted weather conditions permit planting to be performed when beneficial and optimum results may be obtained. Apply products during favorable weather conditions according to manufacturer's written instructions.
- C. Coordinate planting and police detail as required to create safe working conditions for construction crews, pedestrians and motorists

1.8 MAINTENANCE SERVICE

- A. Initial Turf Maintenance Service: Provide full maintenance by skilled employees of landscape Installer. Maintain as required in Part 3. Begin maintenance immediately after each area is planted and continue until acceptable turf is established but for not less than the following periods:
 1. Seeded Turf: 60 days from date of planting completion.
 - a. When initial maintenance period has not elapsed before end of planting season, or if meadow or turf is not fully established, continue maintenance during next planting season.

PART 2 - PRODUCTS

2.1 SEED

- A. Grass Seed: Fresh, clean, dry, new-crop seed complying with AOSA's "Journal of Seed Technology; Rules for Testing Seeds" for purity and germination tolerances.
- B. Grass Seed Mix:
 1. "Green Sun and Shade," as supplied by Cavicchio Greenhouses, Inc., 110 Codjer Lane and 294 Lincoln Rd., Sudbury, MA 01776, 978-443-7177 or approved equal.
 - a. 34% Argyle Kentucky Bluegrass
 - b. 33% Pinnacle II Perennial Ryegrass
 - c. 33% Boreal Creeping Red Fescue

2.2 MULCHES

- A. Straw Mulch: Provide air-dry, clean, mildew- and seed-free, salt hay or threshed straw of wheat, rye, oats, or barley.
- B. Fiber Mulch: Biodegradable, dyed-wood, cellulose-fiber mulch; nontoxic and free of plant-growth or germination inhibitors; with a maximum moisture content of 15 percent and a pH range of 4.5 to 6.5.
- C. Nonasphaltic Tackifier: Colloidal tackifier recommended by fiber-mulch manufacturer for slurry application; nontoxic and free of plant-growth or germination inhibitors.

2.3 EROSION CONTROL BLANKET

- A. Bionet S150BN Double Net Straw Blanket by North American Green, 5401 St. Wendel-Cynthiana Road, Poseyville, IN 47633, 800-772-2040, www.nagreen.com or approved equal.
- B. Erosion Control Blanket shall consist of a layer of 100% straw fiber stitched with biodegradable thread between biodegradable, natural-fiber top and bottom nets. Blanket shall provide up to 12 months of erosion protection and mulching on slopes 3:1 and steeper.

2.4 PESTICIDES

- A. General: Pesticide application is not allowed on this Project.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas to be planted for compliance with requirements and other conditions affecting performance.
 - 1. Verify that no foreign or deleterious material or liquid such as paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, or acid has been deposited in soil within a planting area.
 - 2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
 - 3. Suspend soil spreading, grading, and tilling operations during periods of excessive soil moisture until the moisture content reaches acceptable levels to attain the required results.
 - 4. Uniformly moisten excessively dry soil that is not workable and which is too dusty.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. If contamination by foreign or deleterious material or liquid is present in soil within a planting area, remove the soil and contamination as directed by the Owner and replace with new planting soil.

3.2 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities, trees, shrubs, and plantings from damage caused by planting operations.
 - 1. Protect adjacent and adjoining areas from hydroseeding and hydromulching overspray.
 - 2. Protect grade stakes set by others until directed to remove them.
- B. Install or adjust at the Owner's direction erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.

3.3 TURF AREA PREPARATION

- A. Limit turf subgrade preparation to areas to be planted.
- B. Root Zone Areas of Existing Trees to be Protected: Lightly hand-rake existing turf and soil.
- C. Newly Graded Subgrades: Loosen subgrade to a minimum depth of 8 inches in areas of construction and construction staging and stockpiling. Remove stones larger than 1 inch in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Owner's property.
 - 1. Apply soil amendments as recommended in soil analysis for turf planting.
 - 2. Thoroughly blend planting soil before spreading.
 - a. Mix lime with dry soil before mixing fertilizer.
 - 3. Spread planting soil to a depth of 6 inches but not less than required to meet finish grades after light rolling and natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
- D. Unchanged Subgrades: If turf is to be planted in areas unaltered or undisturbed by excavating, grading, or surface-soil stripping operations, prepare surface soil as follows:
 - 1. Remove existing grass, vegetation, and turf. Do not mix into surface soil.
 - 2. Loosen surface soil to a depth of at least 6 inches. Apply soil amendments and fertilizers according to planting soil mix proportions and mix thoroughly into top 4 inches of soil. Till soil to a homogeneous mixture of fine texture.
 - 3. Remove stones larger than 1 inch in any dimension and sticks, roots, trash, and other extraneous matter.
 - 4. Legally dispose of waste material, including grass, vegetation, and turf, off Owner's property.
- E. Finish Grading: Grade planting areas to a smooth, uniform surface plane with loose, uniformly fine texture. Grade to within plus or minus 1/2 inch of finish elevation. Roll and rake, remove ridges, and fill depressions to meet finish grades. Limit finish grading to areas that can be planted in the immediate future.
- F. Moisten prepared area before planting if soil is dry. Water thoroughly and allow surface to dry before planting. Do not create muddy soil.
- G. Before planting, obtain Owner's acceptance of finish grading; restore planting areas if eroded or otherwise disturbed after finish grading.

3.4 HYDROSEEDING

- A. Hydroseeding: Mix specified seed, fertilizer, and fiber mulch in water, using equipment specifically designed for hydroseed application. Continue mixing until uniformly blended into homogeneous slurry suitable for hydraulic application.
 - 1. Mix slurry with fiber-mulch manufacturer's recommended tackifier.
 - 2. Apply slurry uniformly to all areas to be seeded in a one-step process. Apply slurry at a rate so that mulch component is deposited at not less than 1500-lb/acre dry weight, and seed component is deposited at not less than the specified seed-sowing rate.

3.5 TURF RENOVATION

- A. Renovate existing turf damaged by Contractor's operations, such as storage of materials or equipment and movement of vehicles.
 - 1. Reestablish turf where settlement or washouts occur or where minor regrading is required.
 - 2. Install new planting soil as required.
 - 3. Work within the root zone of existing trees only at the direction of the Owner.
- B. Remove sod and vegetation from diseased or unsatisfactory turf areas; do not bury in soil.
- C. Remove topsoil containing foreign materials such as oil drippings, fuel spills, stones, gravel, and other construction materials resulting from Contractor's operations, and replace with new planting soil.
- D. Mow, dethatch, core aerate, and rake existing turf.
- E. Remove weeds before seeding. Where weeds are extensive, apply selective herbicides as required. Do not use pre-emergence herbicides.
- F. Remove waste and foreign materials, including weeds, soil cores, grass, vegetation, and turf, and legally dispose of them off Owner's property.
- G. Till stripped, bare, and compacted areas thoroughly to a soil depth of 6 inches.
- H. Apply soil amendments and initial fertilizers required for establishing new turf and mix thoroughly into top 4 inches of existing soil. Install new planting soil to fill low spots and meet finish grades.
- I. Apply seed and protect with straw mulch as required for new turf.
- J. Water newly planted areas and keep moist until new turf is established.

3.6 EROSION CONTROL BLANKET

- A. Coordinate hydroseeding and hydromulching operation with installation of erosion control blanket on areas designated on the Drawings and any areas with slopes steeper than 3:1.
- B. Install according to manufacturers' recommendations, keying into the slope, overlapping, seeding, stapling and/ or staking as required.

3.7 TURF MAINTENANCE

- A. Maintain and establish turf by watering, fertilizing, weeding, mowing, trimming, replanting, and performing other operations as required to establish healthy, viable turf. Roll, regrade, and replant bare or eroded areas and remulch to produce a uniformly smooth turf. Provide materials and installation the same as those used in the original installation.
 - 1. Fill in as necessary soil subsidence that may occur because of settling or other processes. Replace materials and turf damaged or lost in areas of subsidence.
 - 2. In areas where mulch has been disturbed by wind or maintenance operations, add new mulch and anchor as required to prevent displacement.
 - 3. Apply treatments as required to keep turf and soil free of pests and pathogens or disease. Use integrated pest management practices.
- B. Watering: Install and maintain temporary piping, hoses, and turf-watering equipment to convey water from sources and to keep turf uniformly moist to a depth of 4 inches.
 - 1. Schedule watering to prevent wilting, puddling, erosion, and displacement of seed or mulch. Lay out temporary watering system to avoid walking over muddy or newly planted areas.
 - 2. Water turf with fine spray at a minimum rate of 1 inch per week unless rainfall precipitation is adequate.
- C. Mow turf as soon as top growth is tall enough to cut. Repeat mowing to maintain specified height without cutting more than 1/3 of grass height. Remove no more than 1/3 of grass-leaf growth in initial or subsequent mowings. Do not delay mowing until grass blades bend over and become matted. Do not mow when grass is wet. Schedule initial and subsequent mowings to maintain the following grass height:
 - 1. Mow turf to a height of 2 to 2 1/2 inches.

3.8 SATISFACTORY TURF

- A. Turf installations shall meet the following criteria as determined by the Owner:
 - 1. Satisfactory Seeded Turf: At end of maintenance period, a healthy, uniform, close stand of grass has been established, free of weeds and surface irregularities, with coverage exceeding 90 percent over any 10 sq. ft. and bare spots not exceeding 3 by 3 inches.
- B. Use specified materials to reestablish turf that does not comply with requirements and continue maintenance until turf is satisfactory.

3.9 CLEANUP AND PROTECTION

- A. Promptly remove soil and debris created by turf work from paved areas. Clean wheels of vehicles before leaving site to avoid tracking soil onto roads, walks, or other paved areas.
- B. Erect temporary fencing or barricades and warning signs as required to protect newly planted areas from traffic. Maintain fencing and barricades throughout initial maintenance period and remove after plantings are established.
- C. Remove nondegradable erosion-control measures after grass establishment period.

END OF SECTION 329200

SECTION 329300

PLANTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Plants.
 - 2. Planting Soil Mix.
- B. Related Sections:
 - 1. Division 32 Section "Steel Edge Restraint"
 - 2. Division 32 Section "Turf and Grasses"

1.3 DEFINITIONS

- A. Backfill: The earth used to replace or the act of replacing earth in an excavation.
- B. Balled and Burlapped Stock: Plants dug with firm, natural balls of earth in which they were grown, with ball size not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required; wrapped with burlap, tied, rigidly supported, and drum laced with twine with the root flare visible at the surface of the ball as recommended by ANSI Z60.1.
- C. Balled and Potted Stock: Plants dug with firm, natural balls of earth in which they are grown and placed, unbroken, in a container. Ball size is not less than diameter and depth recommended by ANSI Z60.1 for type and size of plant required.
- D. Container-Grown Stock: Healthy, vigorous, well-rooted plants grown in a container, with a well-established root system reaching sides of container and maintaining a firm ball when removed from container. Container shall be rigid enough to hold ball shape and protect root mass during shipping and be sized according to ANSI Z60.1 for type and size of plant required.
- E. Duff Layer: The surface layer of native topsoil that is composed of mostly decayed leaves, twigs, and detritus.
- F. Finish Grade: Elevation of finished surface of planting soil.
- G. Manufactured Topsoil: Soil produced off-site by homogeneously blending mineral soils or sand with stabilized organic soil amendments to produce topsoil or planting soil.
- H. Pesticide: A substance or mixture intended for preventing, destroying, repelling, or mitigating a pest. This includes insecticides, miticides, herbicides, fungicides, rodenticides, and

molluscicides. It also includes substances or mixtures intended for use as a plant regulator, defoliant, or desiccant.

- I. Pests: Living organisms that occur where they are not desired, or that cause damage to plants, animals, or people. These include insects, mites, grubs, mollusks (snails and slugs), rodents (gophers, moles, and mice), unwanted plants (weeds), fungi, bacteria, and viruses.
- J. Planting Area: Areas to be planted.
- K. Planting Soil Mix: Standardized topsoil; existing, native surface topsoil; existing, in-place surface soil; imported topsoil; or manufactured topsoil that is modified with soil amendments and perhaps fertilizers to produce a soil mixture best for plant growth.
- L. Plant; Plants; Plant Material: These terms refer to vegetation in general, including trees, shrubs, vines, ground covers, bulbs, corms, tubers, plugs or herbaceous vegetation.
- M. Root Flare: Also called "trunk flare." The area at the base of the plant's stem or trunk where the stem or trunk broadens to form roots; the area of transition between the root system and the stem or trunk.
- N. Stem Girdling Roots: Roots that encircle the stems (trunks) of trees below the soil surface.
- O. Subgrade: Surface or elevation of subsoil remaining after excavation is complete, or the top surface of a fill or backfill before planting soil is placed.
- P. Subsoil: All soil beneath the topsoil layer of the soil profile, and typified by the lack of organic matter and soil organisms.
- Q. Surface Soil: Soil that is present at the top layer of the existing soil profile at the Project site. In undisturbed areas, the surface soil is typically topsoil; but in disturbed areas such as urban environments, the surface soil can be subsoil.

1.4 SUBMITTALS

- A. Product Data: For each type of product indicated, including Planting Soil Mix.
- B. Qualification Data: For qualified landscape Installer. Include list of similar projects completed by Installer demonstrating Installer's capabilities and experience. Include project names, addresses, and year completed, and include names and addresses of owners' contact persons.
- C. Product Certificates: For each type of manufactured product, from manufacturer, and complying with the following:
 - 1. Manufacturer's certified analysis of standard products.
 - 2. Analysis of other materials by a recognized laboratory made according to methods established by the Association of Official Analytical Chemists, where applicable.
- D. Material Test Reports:
 - 1. For native stockpiled topsoil, existing in-place surface soil and imported or manufactured topsoil (if required).
- E. Warranty: Submit One-Year Plant Guarantee.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A qualified Landscape Installer whose work has resulted in successful establishment of plants and vegetated roof plants.
1. Professional Membership: Installer shall be a member in good standing of either the Professional Landcare Network or the American Nursery and Landscape Association.
 2. Experience: Five years' experience in landscape installation in addition to requirements in Division 01 Section "Quality Requirements."
 3. Installer's Field Supervision: Require Installer to maintain an experienced full-time supervisor on Project site when work is in progress.
- B. Soil-Testing Laboratory Qualifications: An independent or university laboratory, recognized by the State Department of Agriculture, with the experience and capability to conduct the testing indicated and that specializes in types of tests to be performed.
1. Soil Testing Laboratory for Planting Soil Mix shall be Soil and Plant Tissue Testing Lab, West Experiment Station, 682 North Pleasant St., University of Massachusetts, Amherst, MA, 01003, <http://www.umass.edu/plsoils/soiltest/>
- C. Soil Analysis for Planting Soil Mix: For each soil type (native stockpiled topsoil, existing in-place surface soil and imported or manufactured topsoil (if required)), furnish soil analysis and a written report stating, percentages of organic matter; gradation of sand, silt, and clay content (USDA textural classification); cation exchange capacity; sodium absorption ratio; deleterious material; pH; and mineral and plant-nutrient content of the soil.
1. Testing methods and written recommendations shall comply with USDA's Handbook No. 60.
 2. Contractor shall follow the soil sampling instructions provided by the University of Massachusetts Soil and Plant Tissue Testing Lab for each soil type.
 3. Report suitability of tested soil for plant growth.
 - a. Based upon the test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 1000 sq. ft. or volume per cu. yd. for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.
 - b. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.
 - c. Recommendations should be made for each unamended soil type (on-site topsoil, existing in-place surface soil and imported or manufactured topsoil) for turf lawn, and trees and shrubs.
- D. Provide quality, size, genus, species, and variety of plants indicated, complying with applicable requirements in ANSI Z60.1.
1. Selection of plants will be made by the Owner, who will tag plants at their place of growth before they are prepared for transplanting.
- E. Measurements: Measure according to ANSI Z60.1. Do not prune to obtain required sizes.
1. Trees and Shrubs: Measure with branches and trunks or canes in their normal position. Take height measurements from or near the top of the root flare for field-grown stock and

container grown stock. Measure main body of tree or shrub for height and spread; do not measure branches or roots tip to tip. Take caliper measurements 6 inches above the root flare for trees up to 4-inch caliper size, and 12 inches above the root flare for larger sizes.

2. Other Plants: Measure with stems, petioles, and foliage in their normal position.

F. Plant Material Observation: The Owner will observe plant material at place of growth and at site before planting for compliance with requirements for genus, species, variety, cultivar, size, and quality. The Owner retains right to observe trees and shrubs further for size and condition of balls and root systems, pests, disease symptoms, injuries, and latent defects and to reject unsatisfactory or defective material at any time during progress of work. Remove rejected trees or shrubs immediately from Project site.

G. Preinstallation Conference: Conduct conference at Project site.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Packaged Materials: Deliver packaged materials in original, unopened containers showing weight, certified analysis, name and address of manufacturer, and indication of conformance with state and federal laws if applicable.

B. Bulk Materials:

1. Do not dump or store bulk materials near structures, utilities, walkways and pavements, or on existing turf areas or plants.
2. Provide erosion-control measures to prevent erosion or displacement of bulk materials, discharge of soil-bearing water runoff, and airborne dust reaching adjacent properties, water conveyance systems, or walkways.
3. Accompany each delivery of bulk fertilizers and soil amendments with appropriate certificates.

C. Plants:

1. Do not prune trees and shrubs before delivery. Protect bark, branches, and root systems from sun scald, drying, wind burn, sweating, whipping, and other handling and tying damage. Do not bend or bind-tie trees or shrubs in such a manner as to destroy their natural shape. Provide protective covering of plants during shipping and delivery. Do not drop plants during delivery and handling.
2. Handle planting stock by root ball.
3. Deliver plants after preparations for planting have been completed, and install immediately. If planting is delayed more than six hours after delivery, set plants and trees in their appropriate aspect (sun, filtered sun, or shade), protect from weather and mechanical damage, and keep roots moist.
 - a. Set balled stock on ground and cover ball with soil.
 - b. Do not remove container-grown stock from containers before time of planting.
 - c. Water root systems of plants stored on-site deeply and thoroughly with a fine-mist spray. Water as often as necessary to maintain root systems in a moist, but not overly-wet condition.

1.7 PROJECT CONDITIONS

A. Field Measurements: Verify actual grade elevations, service and utility locations, and dimensions of plantings and construction contiguous with new plantings by field measurements before proceeding with planting work.

- B. Planting Restrictions: Plant during one of the following periods. Coordinate planting periods with maintenance periods to provide required maintenance from date of Substantial Completion.
1. Planting:
 - a. Deciduous Plants:

<u>Spring Season</u>	<u>Fall Season</u>
March 1 to May 15	September 1 until ground freezes
 - b. Evergreen Plants:

April 1 to June 1	August 15 to November 1
-------------------	-------------------------
- C. Weather Limitations: Proceed with planting only when existing and forecasted weather conditions permit planting to be performed when beneficial and optimum results may be obtained. Apply products during favorable weather conditions according to manufacturer's written instructions and warranty requirements.
- D. Coordination with Seeded Areas: Plant trees, shrubs, and other plants after finish grades are established and before planting seeded areas unless otherwise indicated.
- E. When planting trees, shrubs, and other plants after planting seeded areas, protect seeded areas, and promptly repair damage caused by planting operations.
- F. Coordinate planting and police detail as required to create safe working conditions for delivery and construction crews, pedestrians and motorists

1.8 WARRANTY

- A. Special Warranty: Installer agrees to repair or replace plantings and accessories that fail in materials, workmanship, or growth within specified warranty period.
1. Failures include, but are not limited to, the following:
 - a. Death and unsatisfactory growth, except for defects resulting from abuse, lack of adequate maintenance, or neglect by Owner, or incidents that are beyond Contractor's control.
 - b. Structural failures including plantings falling or blowing over.
 - c. Faulty performance of tree stabilization.
 2. Warranty Periods from Date of Substantial Completion:
 - a. Plants: One year.
 3. Include the following remedial actions as a minimum:
 - a. Immediately remove dead plants and replace unless required to plant in the succeeding planting season.
 - b. Plants:
 - 1) Replace plants that are more than 25 percent dead or in an unhealthy condition at end of warranty period.
 - 2) A limit of one replacement of each plant will be required except for losses or replacements due to failure to comply with requirements.
 - c. Provide extended warranty for period equal to original warranty period, for replaced plant material.

1.9 MAINTENANCE SERVICE

- A. Initial Maintenance Service: Provide maintenance by skilled employees of Landscape Installer. Maintain as required in Part 3. Begin maintenance immediately after plants are installed and continue until plantings are acceptably healthy and well established but for not less than maintenance period below.
1. Maintenance Period: Three months from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PLANT MATERIAL

- A. General: Furnish nursery-grown plants true to genus, species, variety, cultivar, stem form, shearing, and other features indicated in Plant Schedule shown on Drawings and complying with ANSI Z60.1; and with healthy root systems developed by transplanting or root pruning. Provide well-shaped, fully branched, healthy, vigorous stock, densely foliated when in leaf and free of disease, pests, eggs, larvae, and defects such as knots, sun scald, injuries, abrasions, and disfigurement.
1. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed between two branches or between branch and trunk ("included bark"); crossing trunks; cut-off limbs more than 3/4 inch in diameter; or with stem girdling roots will be rejected.
 2. Collected Stock: Do not use plants harvested from the wild, from native stands, from an established landscape planting, or not grown in a nursery unless otherwise indicated.
- B. Provide plants of sizes, grades, and ball or container sizes complying with ANSI Z60.1 for types and form of plants required. Plants of a larger size may be used if acceptable to the Owner, with a proportionate increase in size of roots or balls.
- C. Root-Ball Depth: Furnish trees and shrubs with root balls measured from top of root ball, which shall begin at root flare according to ANSI Z60.1. Root flare shall be visible before planting.
- D. All upland plugs shall meet the following standards:
1. Upland plugs shall be as listed in the PLANT SCHEDULE.
 2. Upland plugs shall be healthy and well cared for, with no evidence of insects or diseases present. Insect-ridden or diseased plants shall be rejected. Plants shall have a deep green foliage and dense, compact growth. Upland plugs shall have multi-stemmed bases and with a root system substantially developed enough to firmly hold the planting media in the tray hole.
- E. Perennials: Provide healthy, disease-free plants of species and variety shown or listed, with well-established root systems reaching to sides of the container to maintain a firm ball, but not with excessive root growth encircling the container. Provide only plants that are acclimated to outdoor conditions before delivery.

2.2 INORGANIC SOIL AMENDMENTS

- A. Lime: ASTM C 602, agricultural liming material containing a minimum of 80 percent calcium carbonate equivalent and as follows:

1. Class: O, with a minimum of 95 percent passing through No. 8 sieve and a minimum of 55 percent passing through No. 60 sieve.
 2. Provide lime in form of ground dolomitic limestone or calcitic limestone.
- B. Sulfur: Granular, biodegradable, and containing a minimum of 90 percent sulfur, with a minimum of 99 percent passing through No. 6 sieve and a maximum of 10 percent passing through No. 40 sieve.
- C. Perlite: Horticultural perlite, soil amendment grade.
- D. Agricultural Gypsum: Minimum 90 percent calcium sulfate, finely ground with 90 percent passing through No. 50 sieve.
- E. Sand: Clean, washed, natural or manufactured, and free of toxic materials.

2.3 ORGANIC SOIL AMENDMENTS

- A. Compost: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 3/4-inch sieve; soluble salt content of 5 to 10 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
1. Organic Matter Content: 50 to 60 percent of dry weight.
 2. Feedstock: Agricultural, food, or industrial residuals; biosolids (Massachusetts Department of Environmental Protection-permitted material); yard trimmings; or source-separated or compostable mixed solid waste.
- B. Wood Derivatives: Decomposed, nitrogen-treated sawdust, ground bark, or wood waste; of uniform texture and free of chips, stones, sticks, soil, or toxic materials.
- C. Manure: Well-rotted, unleached, stable or cattle manure containing not more than 25 percent by volume of straw, sawdust, or other bedding materials; free of toxic substances, stones, sticks, soil, weed seed, debris, and material harmful to plant growth.

2.4 FERTILIZERS

- A. Bonemeal: Commercial, raw or steamed, finely ground; a minimum of 1 percent nitrogen and 10 percent phosphoric acid.
- B. Superphosphate: Commercial, phosphate mixture, soluble; a minimum of 20 percent available phosphoric acid.
- C. Commercial Fertilizer: Commercial-grade complete fertilizer of neutral character, consisting of fast- and slow-release nitrogen, 50 percent derived from natural organic sources of urea formaldehyde, phosphorous, and potassium in the following composition:
1. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing laboratory.
- D. Slow-Release Fertilizer: Granular or pelleted fertilizer consisting of 50 percent water-insoluble nitrogen, phosphorus, and potassium in the following composition:
1. Composition: Nitrogen, phosphorous, and potassium in amounts recommended in soil reports from a qualified soil-testing laboratory.

- E. Planting Tablets: Tightly compressed chip type, long-lasting, slow-release, commercial-grade planting fertilizer in tablet form. Tablets shall break down with soil bacteria, converting nutrients into a form that can be absorbed by plant roots.
 - 1. Size: 5-gram tablets.
 - 2. Nutrient Composition: 20 percent nitrogen, 10 percent phosphorous, and 5 percent potassium, by weight plus micronutrients.
- F. Chelated Iron: Commercial-grade FeEDDHA for dicots and woody plants, and commercial-grade FeDTPA for ornamental grasses and monocots.

2.5 PLANTING SOILS

- A. Planting Soil Mix: Existing, native surface topsoil formed under natural conditions with the duff layer retained during excavation process and stockpiled on-site and amended per the recommendation of soil test reports and the following chemical and mechanical requirements:
 - 1. USDA Classification: "Fine Sandy Loam" or "Sandy Loam"
 - 2. pH range: pH5.6 to pH 6.5
 - 3. Organic Matter Range: Not less than 4% and not more than 10%
 - 4. Free of stones greater than one inch, lumps, plants or their roots, debris and other extraneous matter.
 - 5. No toxic substances harmful to plant growth.
 - 6. Supplement on-site topsoil with imported planting soil when quantities are insufficient.
 - a. Imported topsoil or manufactured topsoil from off-site sources. Obtain topsoil displaced from naturally well-drained construction or mining sites where topsoil occurs at least 4 inches deep; do not obtain from agricultural land, bogs, or marshes.
 - 1) Additional Properties of Imported Topsoil or Manufactured Topsoil: Screened and free of stones 1 inch or larger in any dimension; free of roots, plants, sod, clods, clay lumps, pockets of coarse sand, paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, building debris, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, acid, and other extraneous materials harmful to plant growth; free of obnoxious weeds and invasive plants including quackgrass, Johnsongrass, poison ivy, nutsedge, nimblewill, Canada thistle, bindweed, bentgrass, wild garlic, ground ivy, perennial sorrel, and brome grass; not infested with nematodes; grubs; or other pests, pest eggs, or other undesirable organisms and disease-causing plant pathogens; friable and with sufficient structure to give good tilth and aeration. Continuous, air-filled pore space content on a volume/volume basis shall be at least 15 percent when moisture is present at field capacity. Soil shall have a field capacity of at least 15 percent on a dry weight basis.
 - 2) Test imported topsoil or manufactured topsoil and amend per the recommendation of soil test reports and the chemical and mechanical requirements for Planting Soil Mix listed above.

2.6 MULCHES

- A. Mulch shall be dark, composted triple-ground premium bark mulch, aged for at least 6 months and not longer than 2 years. Bark mulch shall be dark brown in color (dyes not permitted), shredded to a uniform size, free of dirt, debris and foreign matter, with pieces no thicker than ¼". Mulch shall be free of stringy material or chunks over 3 inches in size and shall not contain, in the judgement of the Owner, an excess of fine particles. Submit sample for Owner approval.
- B. Compost Mulch: Well-composted, stable, and weed-free organic matter, pH range of 5.5 to 8; moisture content 35 to 55 percent by weight; 100 percent passing through 1-inch sieve; soluble salt content of 2 to 5 decisiemens/m; not exceeding 0.5 percent inert contaminants and free of substances toxic to plantings; and as follows:
 - 1. Organic Matter Content: 50 to 60 percent of dry weight.
 - 2. Feedstock: Agricultural, food, or industrial residuals; biosolids (Massachusetts Department of Environmental Protection-permitted material); yard trimmings; or source-separated or compostable mixed solid waste.

2.7 PESTICIDES

- A. General: Pesticide application is not allowed on this Project.

2.8 TREE STABILIZATION MATERIALS

- A. Stakes and Guys:
 - 1. Upright and Guy Stakes: Rough-sawn, sound, new hardwood, free of knots, holes, cross grain, and other defects, 2-by-4-inch nominal by 10' length, notched to receive guy wires, pointed at one end. Stain black.
 - 2. Guy Wires: 12-gauge galvanized-steel wire, with zinc-coated turnbuckles.
 - 3. Hose to encase wires shall be new two-ply reinforced rubber garden hose not less than 1/2 inch inside diameter. Color shall be black.
 - 4. Flags: Standard surveyor's plastic flagging tape, white, 12 inches long.

2.9 MISCELLANEOUS PRODUCTS

- A. Antidesiccant: Water-insoluble emulsion, permeable moisture retarder, film forming, for trees and shrubs. Deliver in original, sealed, and fully labeled containers and mix according to manufacturer's written instructions.
- B. Burlap: Non-synthetic, biodegradable.
- C. Bio-degradable jute mesh, satisfying the following specifications:
 - 1. Aperture ≥ 0.375 in and ≤ 1.0 in
 - 2. Weight ≤ 20 oz/ft²
 - 3. Tensile strength (ASTM D4632) ≥ 20 lb
- D. Mycorrhizal Fungi: Dry, granular inoculant containing at least 5300 spores per lb of vesicular-arbuscular mycorrhizal fungi and 95 million spores per lb of ectomycorrhizal fungi, 33 percent hydrogel, and a maximum of 5.5 percent inert material.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas to receive plants for compliance with requirements and conditions affecting installation and performance.
 - 1. Verify that no foreign or deleterious material or liquid such as paint, paint washout, concrete slurry, concrete layers or chunks, cement, plaster, oils, gasoline, diesel fuel, paint thinner, turpentine, tar, roofing compound, or acid has been deposited in soil within a planting area.
 - 2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
 - 3. Suspend soil spreading, grading, and tilling operations during periods of excessive soil moisture until the moisture content reaches acceptable levels to attain the required results.
 - 4. Uniformly moisten excessively dry soil that is not workable and which is too dusty.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.
- C. If contamination by foreign or deleterious material or liquid is present in soil within a planting area, remove the soil and contamination as directed by the Owner and replace with new planting soil.

3.2 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities and turf areas and existing plants from damage caused by planting operations.
- B. Install erosion-control measures to prevent erosion or displacement of soils and discharge of soil-bearing water runoff or airborne dust to adjacent properties and walkways.
- C. Lay out individual tree and shrub locations and areas for multiple plantings. Stake locations, outline areas, adjust locations when requested, and obtain the Owner's acceptance of layout before excavating or planting. Make minor adjustments as required.
- D. The Owner's representative will lay out plants.
- E. Wrap trees and shrubs with burlap fabric over trunks, branches, stems, twigs, and foliage to protect from wind and other damage during digging, handling, and transportation.

3.3 PLANTING AREA ESTABLISHMENT

- A. Planting Areas: Loosen subgrade of planting areas to the dimensions indicated on the Drawings. Remove stones larger than 2 inches in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Owner's property.
 - 1. Thoroughly blend planting soil before spreading.
 - a. Delay mixing fertilizer with planting soil if planting will not proceed within a few days.
 - b. Mix lime with dry soil before mixing fertilizer.

2. Spread planting soil to a depth of 6 inches but not less than required to meet finish grades after natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
 - a. Spread approximately one-half the thickness of planting soil over loosened subgrade. Mix thoroughly into top 2 inches of subgrade. Spread remainder of planting soil.
3. Finish Grading: Grade planting areas to a smooth, uniform surface plane with loose, uniformly fine texture. Roll and rake, remove ridges, and fill depressions to meet finish grades.
4. Before planting, obtain the Owner's acceptance of finish grading; restore planting areas if eroded or otherwise disturbed after finish grading.
5. All plants shall be inoculated with mycorrhizal fungi. Inoculant shall be added after the plants have been placed in their holes. Open the required number of packets for each plant and thoroughly mix the inoculant powder into the upper 10 inches of backfill soil.
 - a. Mycorrhizal fungal inoculant shall be added to the plant pits according to plant size.
 - b. The application rates for mycorrhizal fungal packets shall be in accordance with the manufacturer's recommendations.
 - c. Submit the purchasing receipt showing the total quantity purchased for the project prior to installation. Submit empty packets of fungal spore inoculant to the Engineer for verification of use. Engineer shall excavate tree pits to determine presence of mycorrhizal fungal inoculant.

3.4 EXCAVATION FOR TREES AND SHRUBS

- A. Planting Pits and Trenches: Excavate circular planting pits to the dimensions shown of the Drawings, with sides sloping inward at a 45-degree angle. Excavations with vertical sides are not acceptable. Trim perimeter of bottom leaving center area of bottom raised slightly to support root ball and assist in drainage away from center. Do not further disturb base. Ensure that root ball will sit on undisturbed base soil to prevent settling. Scarify sides of planting pit smeared or smoothed during excavation.
 1. Do not excavate deeper than depth of the root ball, measured from the root flare to the bottom of the root ball.
 2. If area under the plant was initially dug too deep, add soil to raise it to the correct level and thoroughly tamp the added soil to prevent settling.
 3. Maintain required angles of repose of adjacent materials as shown on the Drawings. Do not excavate subgrades of adjacent paving, structures, hardscapes, or other new or existing improvements.
 4. Maintain supervision of excavations during working hours.
 5. Keep excavations covered or otherwise protected when unattended by Installer's personnel.
- B. Subsoil and topsoil removed from excavations may be used as backfill planting soil.
- C. Obstructions: Notify the Owner if unexpected rock or obstructions detrimental to trees or shrubs are encountered in excavations.
- D. Drainage: Notify the Owner if subsoil conditions evidence unexpected water seepage or retention in tree or shrub planting pits.

3.5 TREE AND SHRUB PLANTING

- A. Before planting, verify that root flare is visible at top of root ball according to ANSI Z60.1. If root flare is not visible, remove soil in a level manner from the root ball to where the top-most root emerges from the trunk. After soil removal to expose the root flare, verify that root ball still meets size requirements.
- B. Remove stem girdling roots and kinked roots. Remove injured roots by cutting cleanly; do not break.
- C. Set plant plumb and in center of planting pit or trench with root flare 1 inch above adjacent finish grades.
 - 1. Use soil excavated for planting pit or planting soil mix for backfill.
 - 2. After placing some backfill around root ball to stabilize plant, carefully cut and remove burlap, rope, and wire baskets. Remove pallets, if any, before setting. Do not use planting stock if root ball is cracked or broken before or during planting operation.
 - 3. Backfill around root ball in layers, tamping to settle soil and eliminate voids and air pockets. When planting pit is approximately one-half filled, water thoroughly before placing remainder of backfill. Repeat watering until no more water is absorbed.
 - 4. Place planting tablets in each planting pit when pit is approximately one-half filled; in amounts recommended in soil reports from soil-testing laboratory. Place tablets beside the root ball about 1 inch from root tips; do not place tablets in bottom of the hole.
 - 5. Continue backfilling process. Water again after placing and tamping final layer of soil.
- D. When planting on slopes, set the plant so the root flare on the uphill side is flush with the surrounding soil on the slope; the edge of the root ball on the downhill side will be above the surrounding soil. Apply enough soil to cover the downhill side of the root ball.

3.6 MECHANIZED TREE SPADE PLANTING

- A. Trees may be planted with an approved mechanized tree spade at the designated locations. Do not use tree spade to move trees larger than the maximum size allowed for a similar field-grown, balled-and-burlapped root-ball diameter according to ANSI Z60.1, or larger than the manufacturer's maximum size recommendation for the tree spade being used, whichever is smaller.
- B. When extracting the tree, center the trunk within the tree spade and move tree with a solid ball of earth.
- C. Cut exposed roots cleanly during transplanting operations.
- D. Use the same tree spade to excavate the planting hole as was used to extract and transport the tree.
- E. Plant trees as shown on Drawings, following procedures in "Tree and Shrub Planting" Article below.
- F. Where possible, orient the tree in the same direction as in its original location.

3.7 TREE AND SHRUB PRUNING

- A. Remove only dead, dying, or broken branches. Do not prune for shape.

- B. Do not apply pruning paint to wounds.

3.8 TREE STABILIZATION

- A. Staking and guying shall be determined by the Owner on a tree by tree basis.
- B. If staking and guying is required, install tree stabilization as shown on the drawings and as directed by Owner.
- C. Remove tree stabilization materials prior to Acceptance at the end of the guarantee period.

3.9 GROUND COVER AND PLANT PLANTING

- A. Ground cover and plants other than trees, shrubs and vines shall be placed in the field by the Owner.
- B. For rooted cutting plants supplied in flats, plant each in a manner that will minimally disturb the root system but to a depth not less than two nodes.
- C. Work soil around roots to eliminate air pockets and leave a slight saucer indentation around plants to hold water.
- D. Water thoroughly after planting, taking care not to cover plant crowns with wet soil.
- E. Protect plants from hot sun and wind; remove protection if plants show evidence of recovery from transplanting shock. All trees for the project shall be individually tagged for approval with the Owner's tags, and no trees shall be accepted for delivery to the site without such tags. Representative samples only of shrubs and representative sample trays of each of plug species (50 plugs per tray, typical) may be tagged or marked for approval as an "Approved Typical Sample". Any shrub or plug that arrives at the construction site that does not meet the Approved Typical Sample shall be rejected by the Owner.
- F. All plants shall be inoculated with mycorrhizal fungi. Inoculant shall be added after the plants have been placed in their holes. Open the required number of packets for each plant and thoroughly mix the inoculant powder into the upper 10 inches of backfill soil.
 - 1. Mycorrhizal fungal inoculant shall be added to the plant pits according to plant size.
 - 2. The application rates for mycorrhizal fungal packets shall be in accordance with the manufacturer's recommendations.
 - 3. Submit the purchasing receipt showing the total quantity purchased for the project prior to installation. Submit empty packets of fungal spore inoculant to the Owner for verification of use. The Owner shall excavate tree pits to determine presence of mycorrhizal fungal inoculant.

3.10 PLANTING AREA MULCHING

- A. Mulch backfilled surfaces of planting areas and other areas indicated.
 - 1. Trees in Turf Areas: Apply bark mulch ring of 2-inch average thickness over planting pit. Do not place mulch within 6 inches of trunks.
 - 2. Bark Mulch in Planting Areas: Apply 2-inch average thickness of organic mulch over whole surface of planting area, and finish level with adjacent finish grades. Do not place mulch within 3 inches of stems.

3.11 EDGING INSTALLATION

- A. Shovel-Cut Edging: Separate mulched areas from turf areas with a 45-degree, 4- to 6-inch-deep, shovel-cut edge

3.12 PLANT MAINTENANCE

- A. For Planting:
 - 1. Maintain plantings by pruning, cultivating, watering, weeding, fertilizing, mulching, restoring planting saucers, adjusting and repairing tree-stabilization devices, resetting to proper grades or vertical position, and performing other operations as required to establish healthy, viable plantings.
 - 2. Fill in as necessary soil subsidence that may occur because of settling or other processes with specified soils. Replace bark mulch damaged or lost in areas of subsidence.
 - 3. Apply treatments as required to keep plant materials, planted areas, and soils free of pests and pathogens or disease. Use integrated pest management practices. Treatments include physical controls such as hosing off foliage, mechanical controls such as traps, and biological control agents.

3.13 CLEANUP AND PROTECTION








- A. During planting, keep adjacent paving and construction clean and work area in an orderly condition.
- B. Protect plants from damage due to landscape operations and operations of other contractors and trades. Maintain protection during installation and maintenance periods. Treat, repair, or replace damaged plantings.
- C. After installation and before Substantial Completion, remove nursery tags, nursery stakes, tie tape, labels, wire, burlap, and other debris from plant material, planting areas, and Project site.

3.14 DISPOSAL

- A. Remove surplus soil and waste material including excess subsoil, unsuitable soil, trash, and debris and legally dispose of them off Owner's property.

END OF SECTION 329300

LEGEND


-  PROPOSED SHRUBS
-  PROPOSED DECIDUOUS TREE
-  PROPOSED EVERGREEN TREE
-  MOWED LAWN
-  GROUND COVERS & PERENNIALS
-  SWITCHGRASS MEADOW
-  ARLINGTON WELCOME SIGN

NOTES





1. THE EXISTING CONDITIONS SHOWN HEREON ARE REFERENCED FROM THE TOWN OF ARLINGTON, MA G.I.S. & ARE NOT MEANT TO REPRESENT SURVEYED CONDITIONS. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN THE FIELD, INCLUDING LOCATIONS OF UTILITIES.
2. DEMOLITION & SITE PREPARATION BY OWNER.
3. AUTOMATIC IRRIGATION BY OWNER. CONTRACTOR SHALL COORDINATE INSTALLATION OF SITE IMPROVEMENTS & PLANTING WITH AUTOMATIC IRRIGATION.
4. INSTALLATION OF ARLINGTON WELCOME SIGN BY OTHERS.
5. ALL PLANTS TO BE LOCATED IN THE FIELD BY THE OWNER'S REPRESENTATIVE.

PLANT SCHEDULE

EVERGREEN TREES				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
7	TO	<i>Thuja occidentalis 'Techny'</i>	Techny Arborvitae	6-7' ht.
DECIDUOUS UNDERSTORY TREES				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
5	CC	<i>Carpinus caroliniana</i>	Hornbeam	7-8' ht. multi
1	NS	<i>Nyssa sylvatica</i>	Tupelo	6-7' ht.
DECIDUOUS SHRUBS				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
10	AP	<i>Aronia arbutifolia 'Brilliantissima'</i>	Red Chokeberry	#5
GROUND COVERS & PERENNIALS				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
36	AE	<i>Aster ericoides 'Snow Flurry'</i>	Heath Aster	flats/ plugs
40	DP	<i>Dennstaedtia punctilobula</i>	Hay-scented Fern	flats/ plugs
30	GF	<i>Geum fragarioides</i>	Barren Strawberry	flats/ plugs
85	PV	<i>Panicum virgatum 'Shenandoah'</i>	Shenandoah Switchgrass	flats/ plugs
36	PT	<i>Potentilla tridentata</i>	Three-toothed Cinquefoil	#1
100	VL	<i>Viola labradorica</i>	Labrador Violet	flats/ plugs

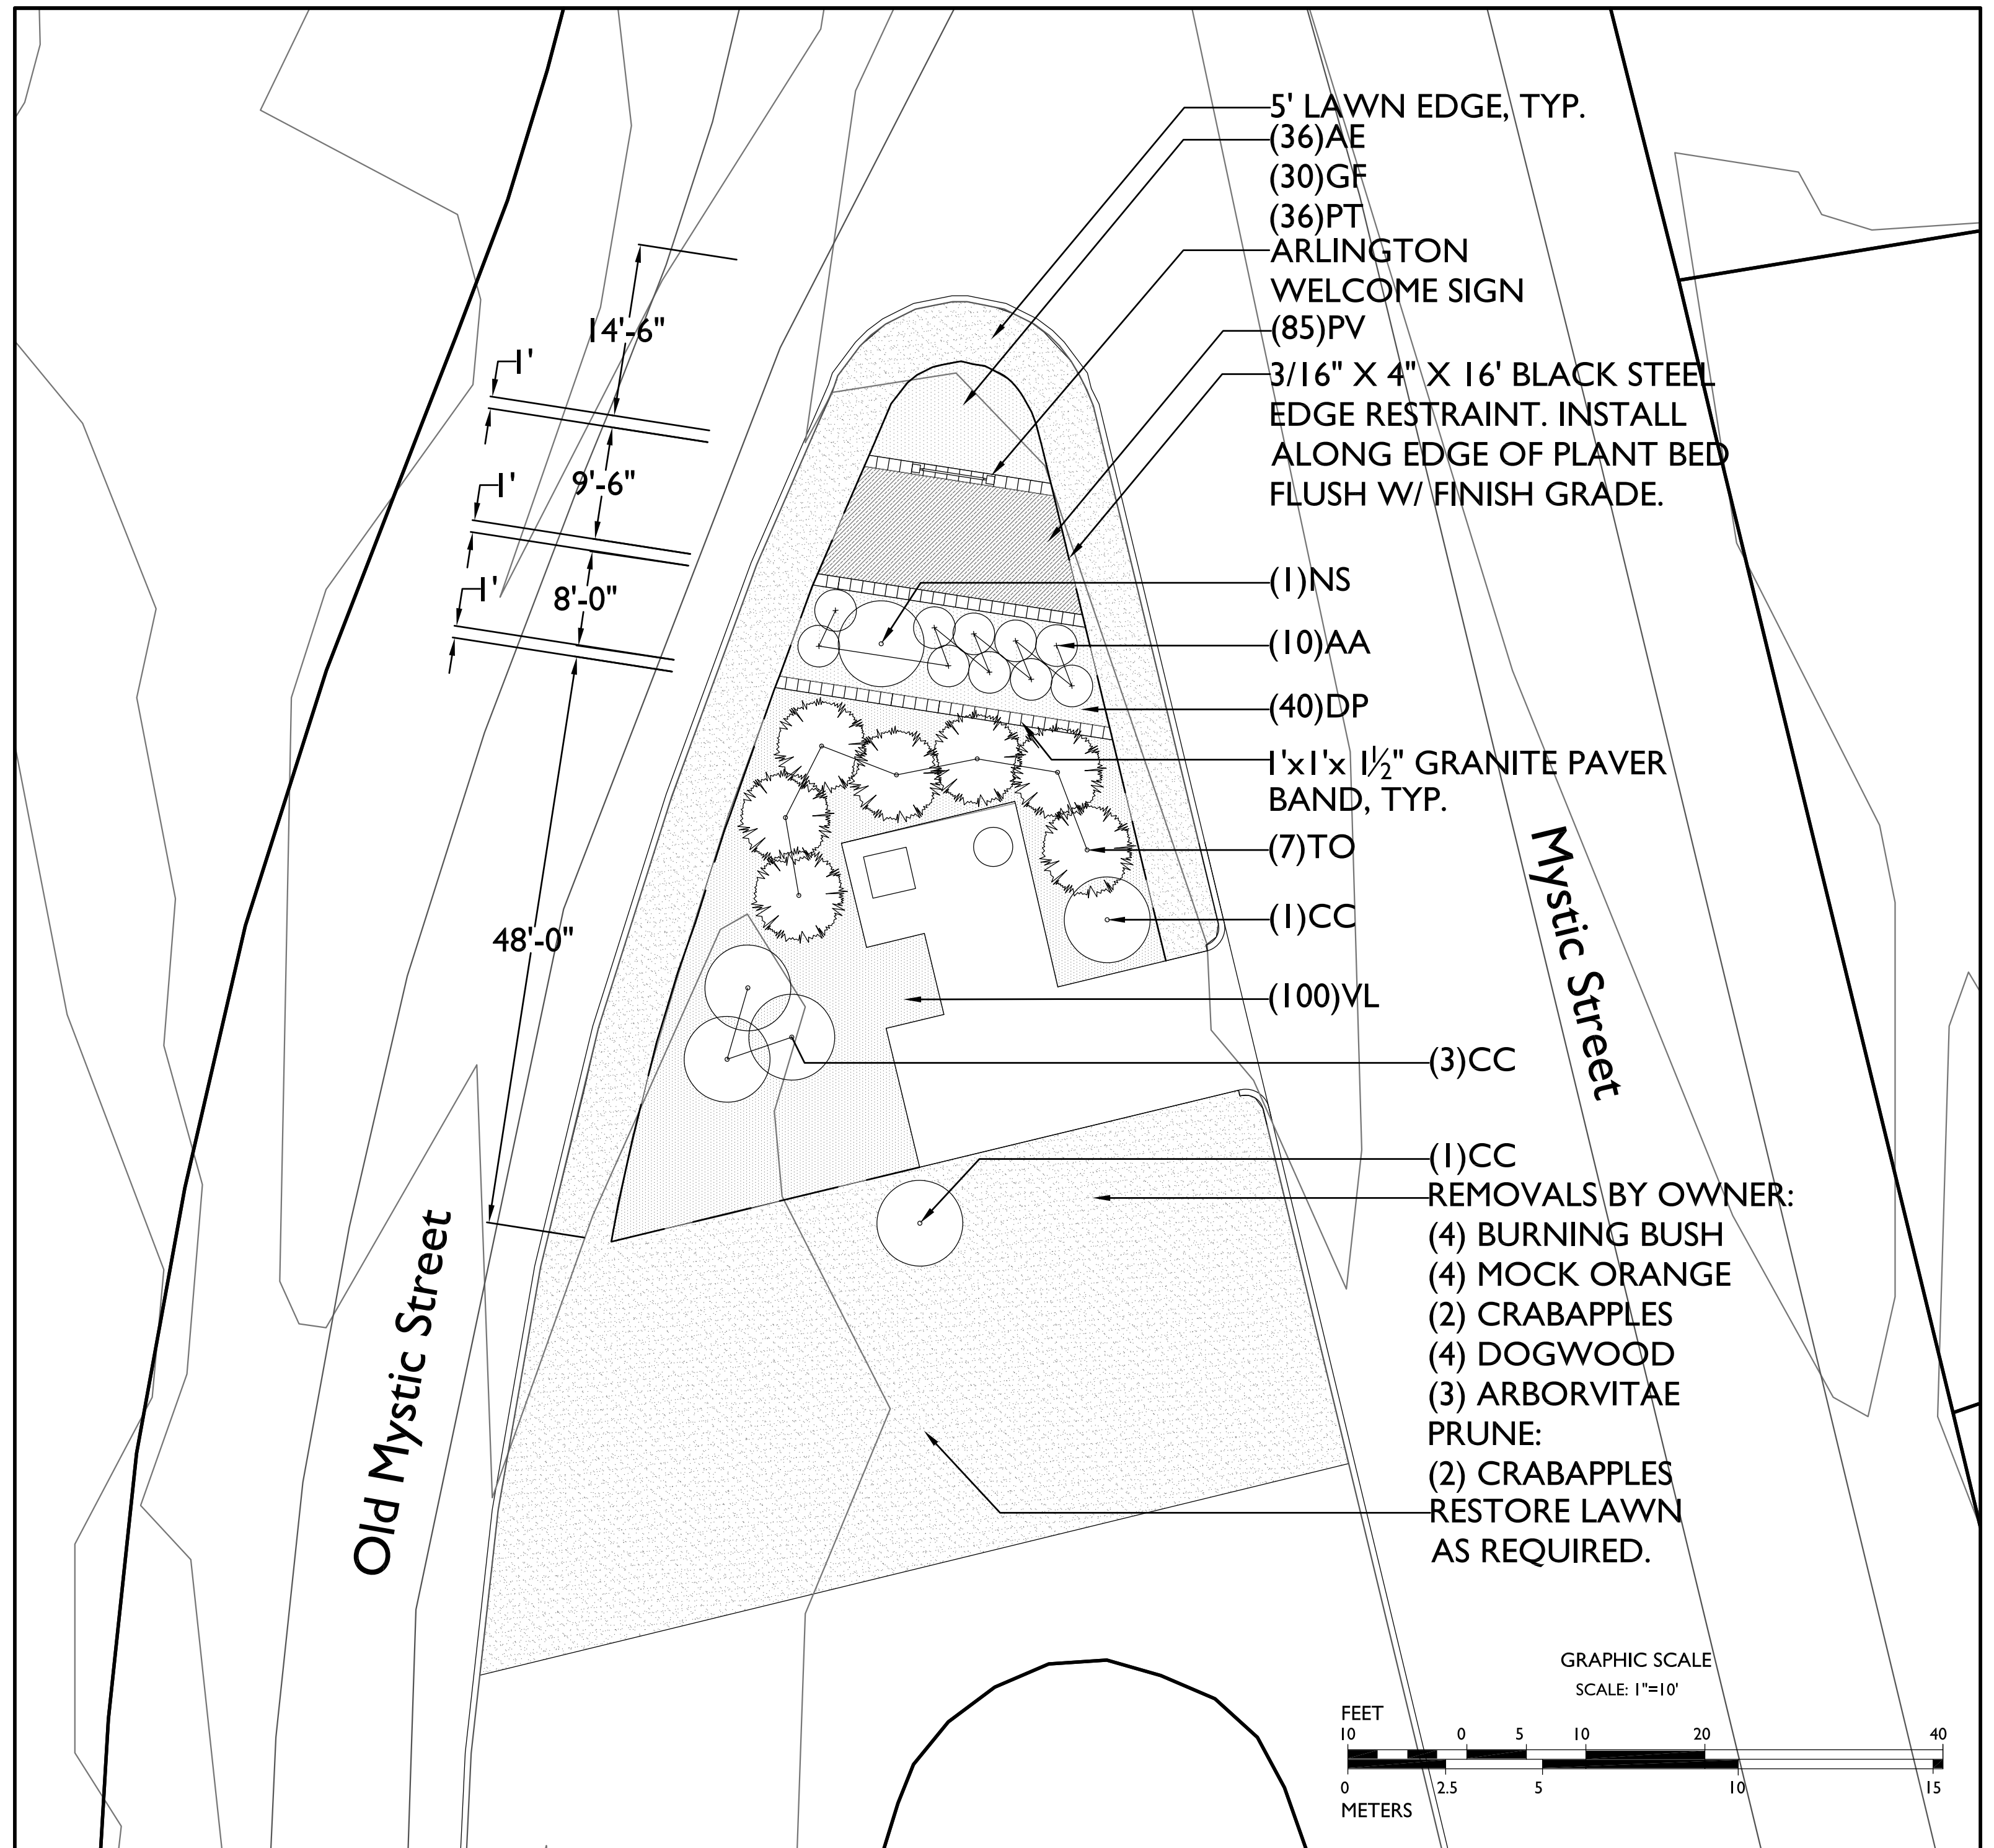


LEGEND

-  PROPOSED DECIDUOUS TREE
-  EXISTING DECIDUOUS TREE TO REMAIN
-  MOWED LAWN; SEED & LOAM AS REQUIRED TO RESTORE LAWN
-  ARLINGTON WELCOME SIGN


NOTES

1. THE EXISTING CONDITIONS SHOWN HEREON ARE REFERENCED FROM THE TOWN OF ARLINGTON, MA G.I.S. & ARE NOT MEANT TO REPRESENT SURVEYED CONDITIONS. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN THE FIELD, INCLUDING LOCATIONS OF UTILITIES.
2. DEMOLITION & SITE PREPARATION BY OWNER.
3. INSTALLATION OF ARLINGTON WELCOME SIGN BY OTHERS.
4. TREE TO BE LOCATED IN THE FIELD BY THE OWNER'S REPRESENTATIVE.

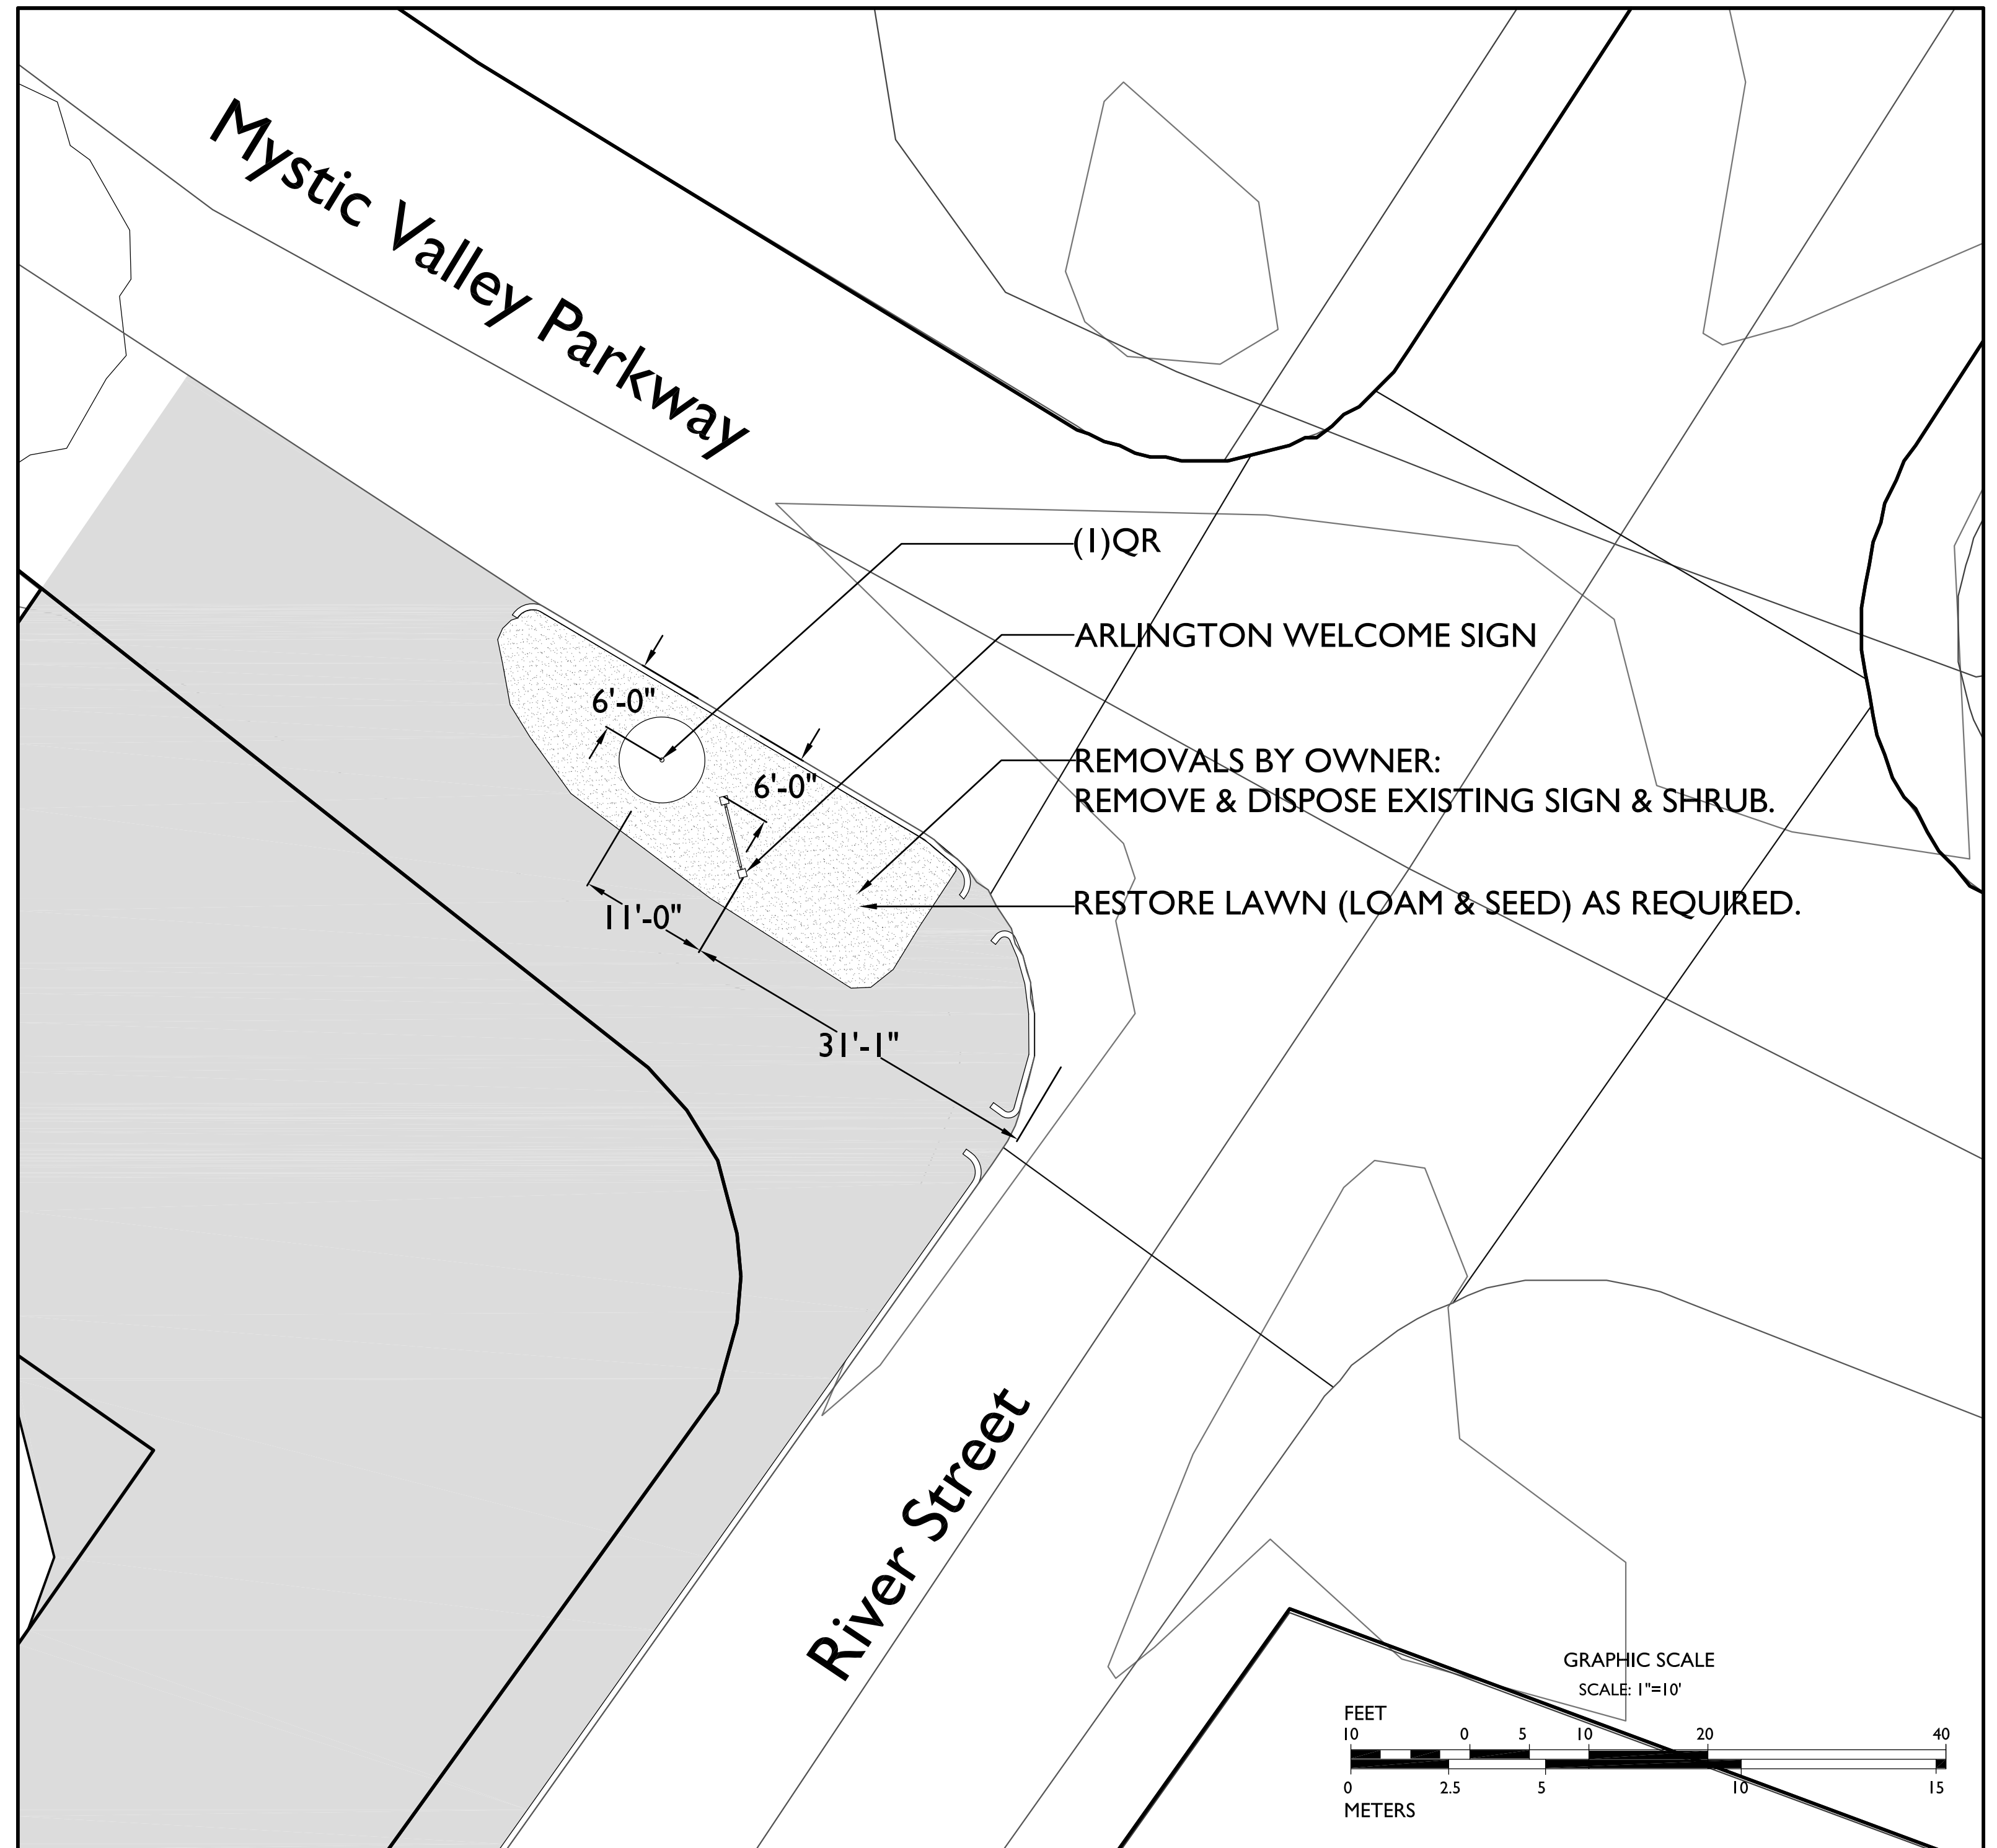







PLANT SCHEDULE

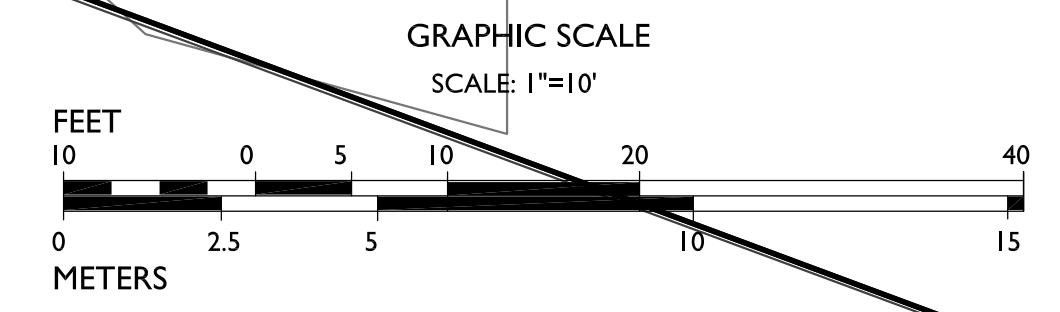DECIDUOUS TREES				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
1	QR	Quercus rubra	Northern Red Oak	2" cal.



LEGEND

-  PROPOSED TREE
-  PROPOSED SHRUBS
-  EXISTING EVERGREEN TREE TO REMAIN
-  GROUND COVERS & PERENNIALS
-  NATIVE GRASS MEADOW
-  ARLINGTON WELCOME SIGN

NOTES


1. THE EXISTING CONDITIONS SHOWN HEREON ARE REFERENCED FROM THE TOWN OF ARLINGTON, MA G.I.S. & ARE NOT MEANT TO REPRESENT SURVEYED CONDITIONS. CONTRACTOR SHALL VERIFY ALL CONDITIONS IN THE FIELD, INCLUDING LOCATIONS OF UTILITIES.
2. DEMOLITION & SITE PREPARATION BY OWNER.
3. AUTOMATIC IRRIGATION BY OWNER. CONTRACTOR SHALL COORDINATE INSTALLATION OF SITE IMPROVEMENTS & PLANTING WITH AUTOMATIC IRRIGATION.
4. INSTALLATION OF ARLINGTON WELCOME SIGN BY OTHERS.
5. ALL PLANTS TO BE LOCATED IN THE FIELD BY THE OWNER'S REPRESENTATIVE.


PLANT SCHEDULE (Base Bid)

DECIDUOUS UNDERSTORY TREES				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
6	CCI	<i>Crataegus crus-galli</i> 'inermis'	Thornless Cockspur Haw.	6-7' ht., multi

DECIDUOUS SHRUBS				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
14	HK	<i>Hypericum kalmianum</i>	Kalm St. Johns Wort	#3/ 24" ht.
8	IV	<i>Ilex verticillata</i> 'Red Sprite'	'Red Sprite' Winterberry	#3/ 24" ht., 1 male

GROUND COVERS & PERENNIALS				
QTY.	SYM.	SCIENTIFIC NAME	COMMON NAME	SIZE
144	AE	<i>Aster ericoides</i> 'Snow Flurry'	Heath Aster	flats/ plugs
50	DP	<i>Dennstaedtia punctilobula</i>	Hay-scented Fern	flats/ plugs
125	GT	<i>Gillenia trifoliata</i>	Bowman's Root	flats/ plugs
400	PV	<i>Panicum virgatum</i> 'Shenandoah'	Shenandoah Switchgrass	flats/ plugs
144	PT	<i>Potentilla tridentata</i>	Three-toothed Cinquefoil	#1
175	PM	<i>Pycnanthemum muticum</i>	Short-toothed Mtn. Mint	flats/ plugs

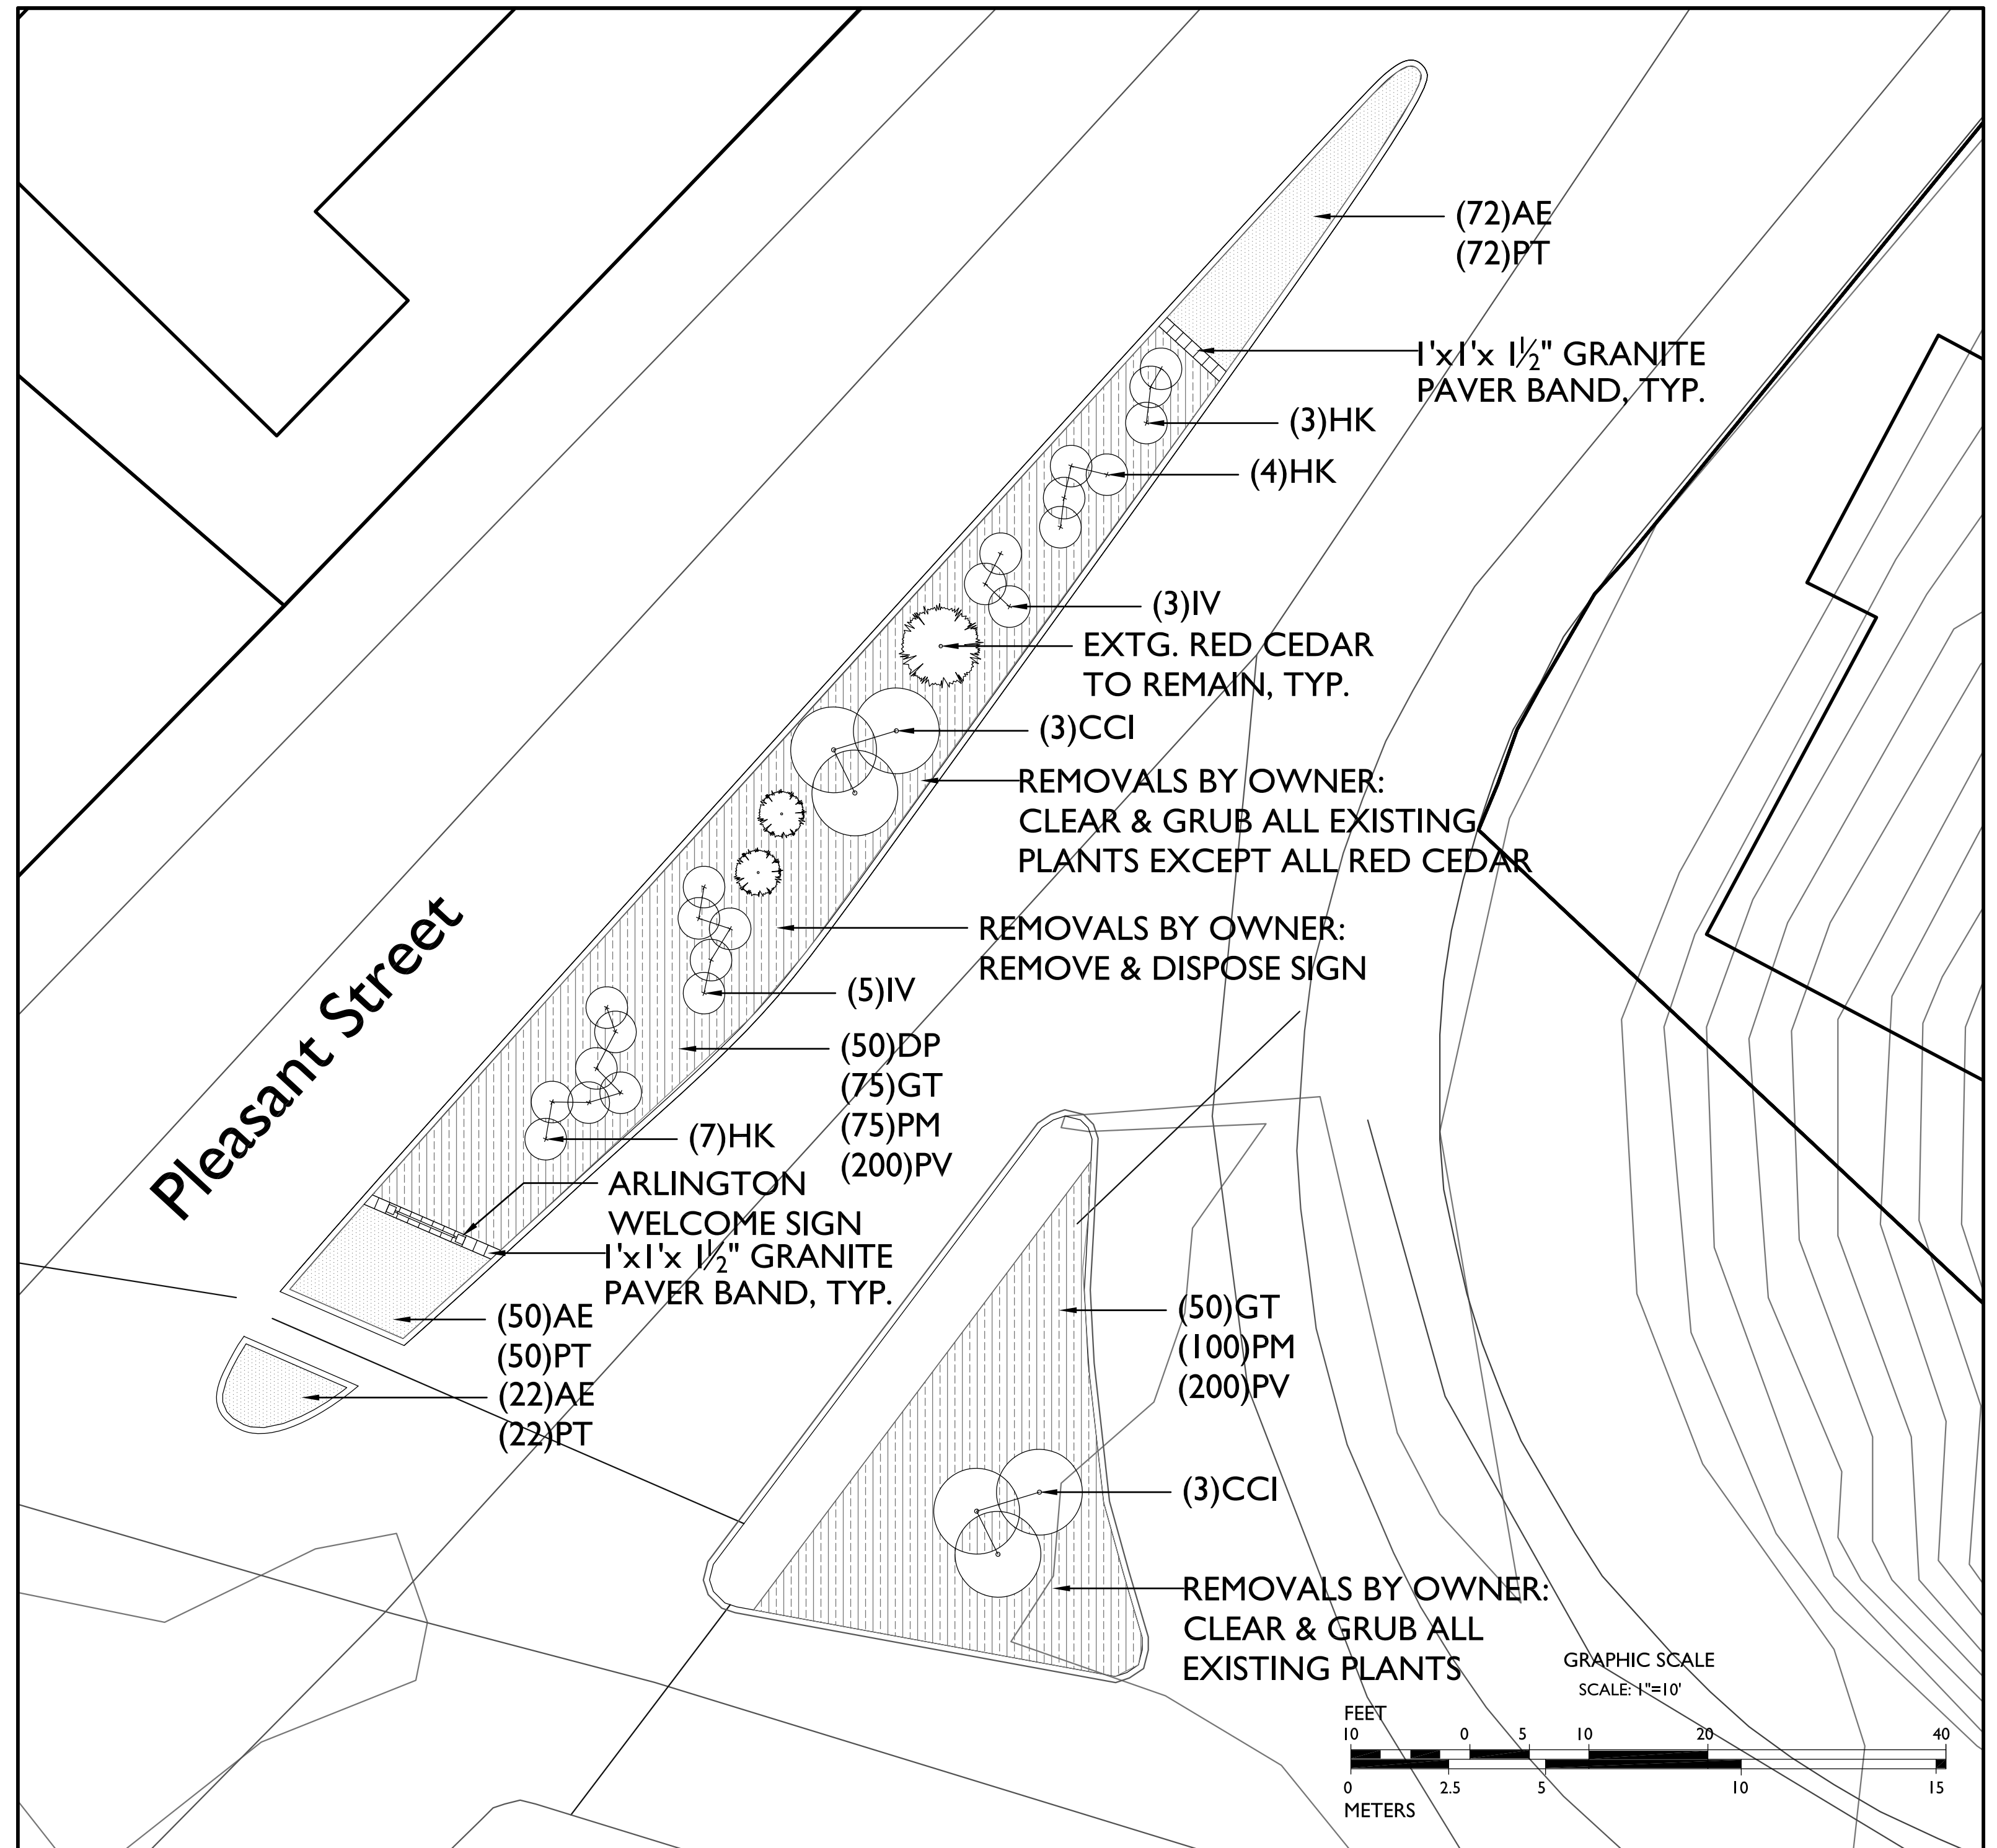

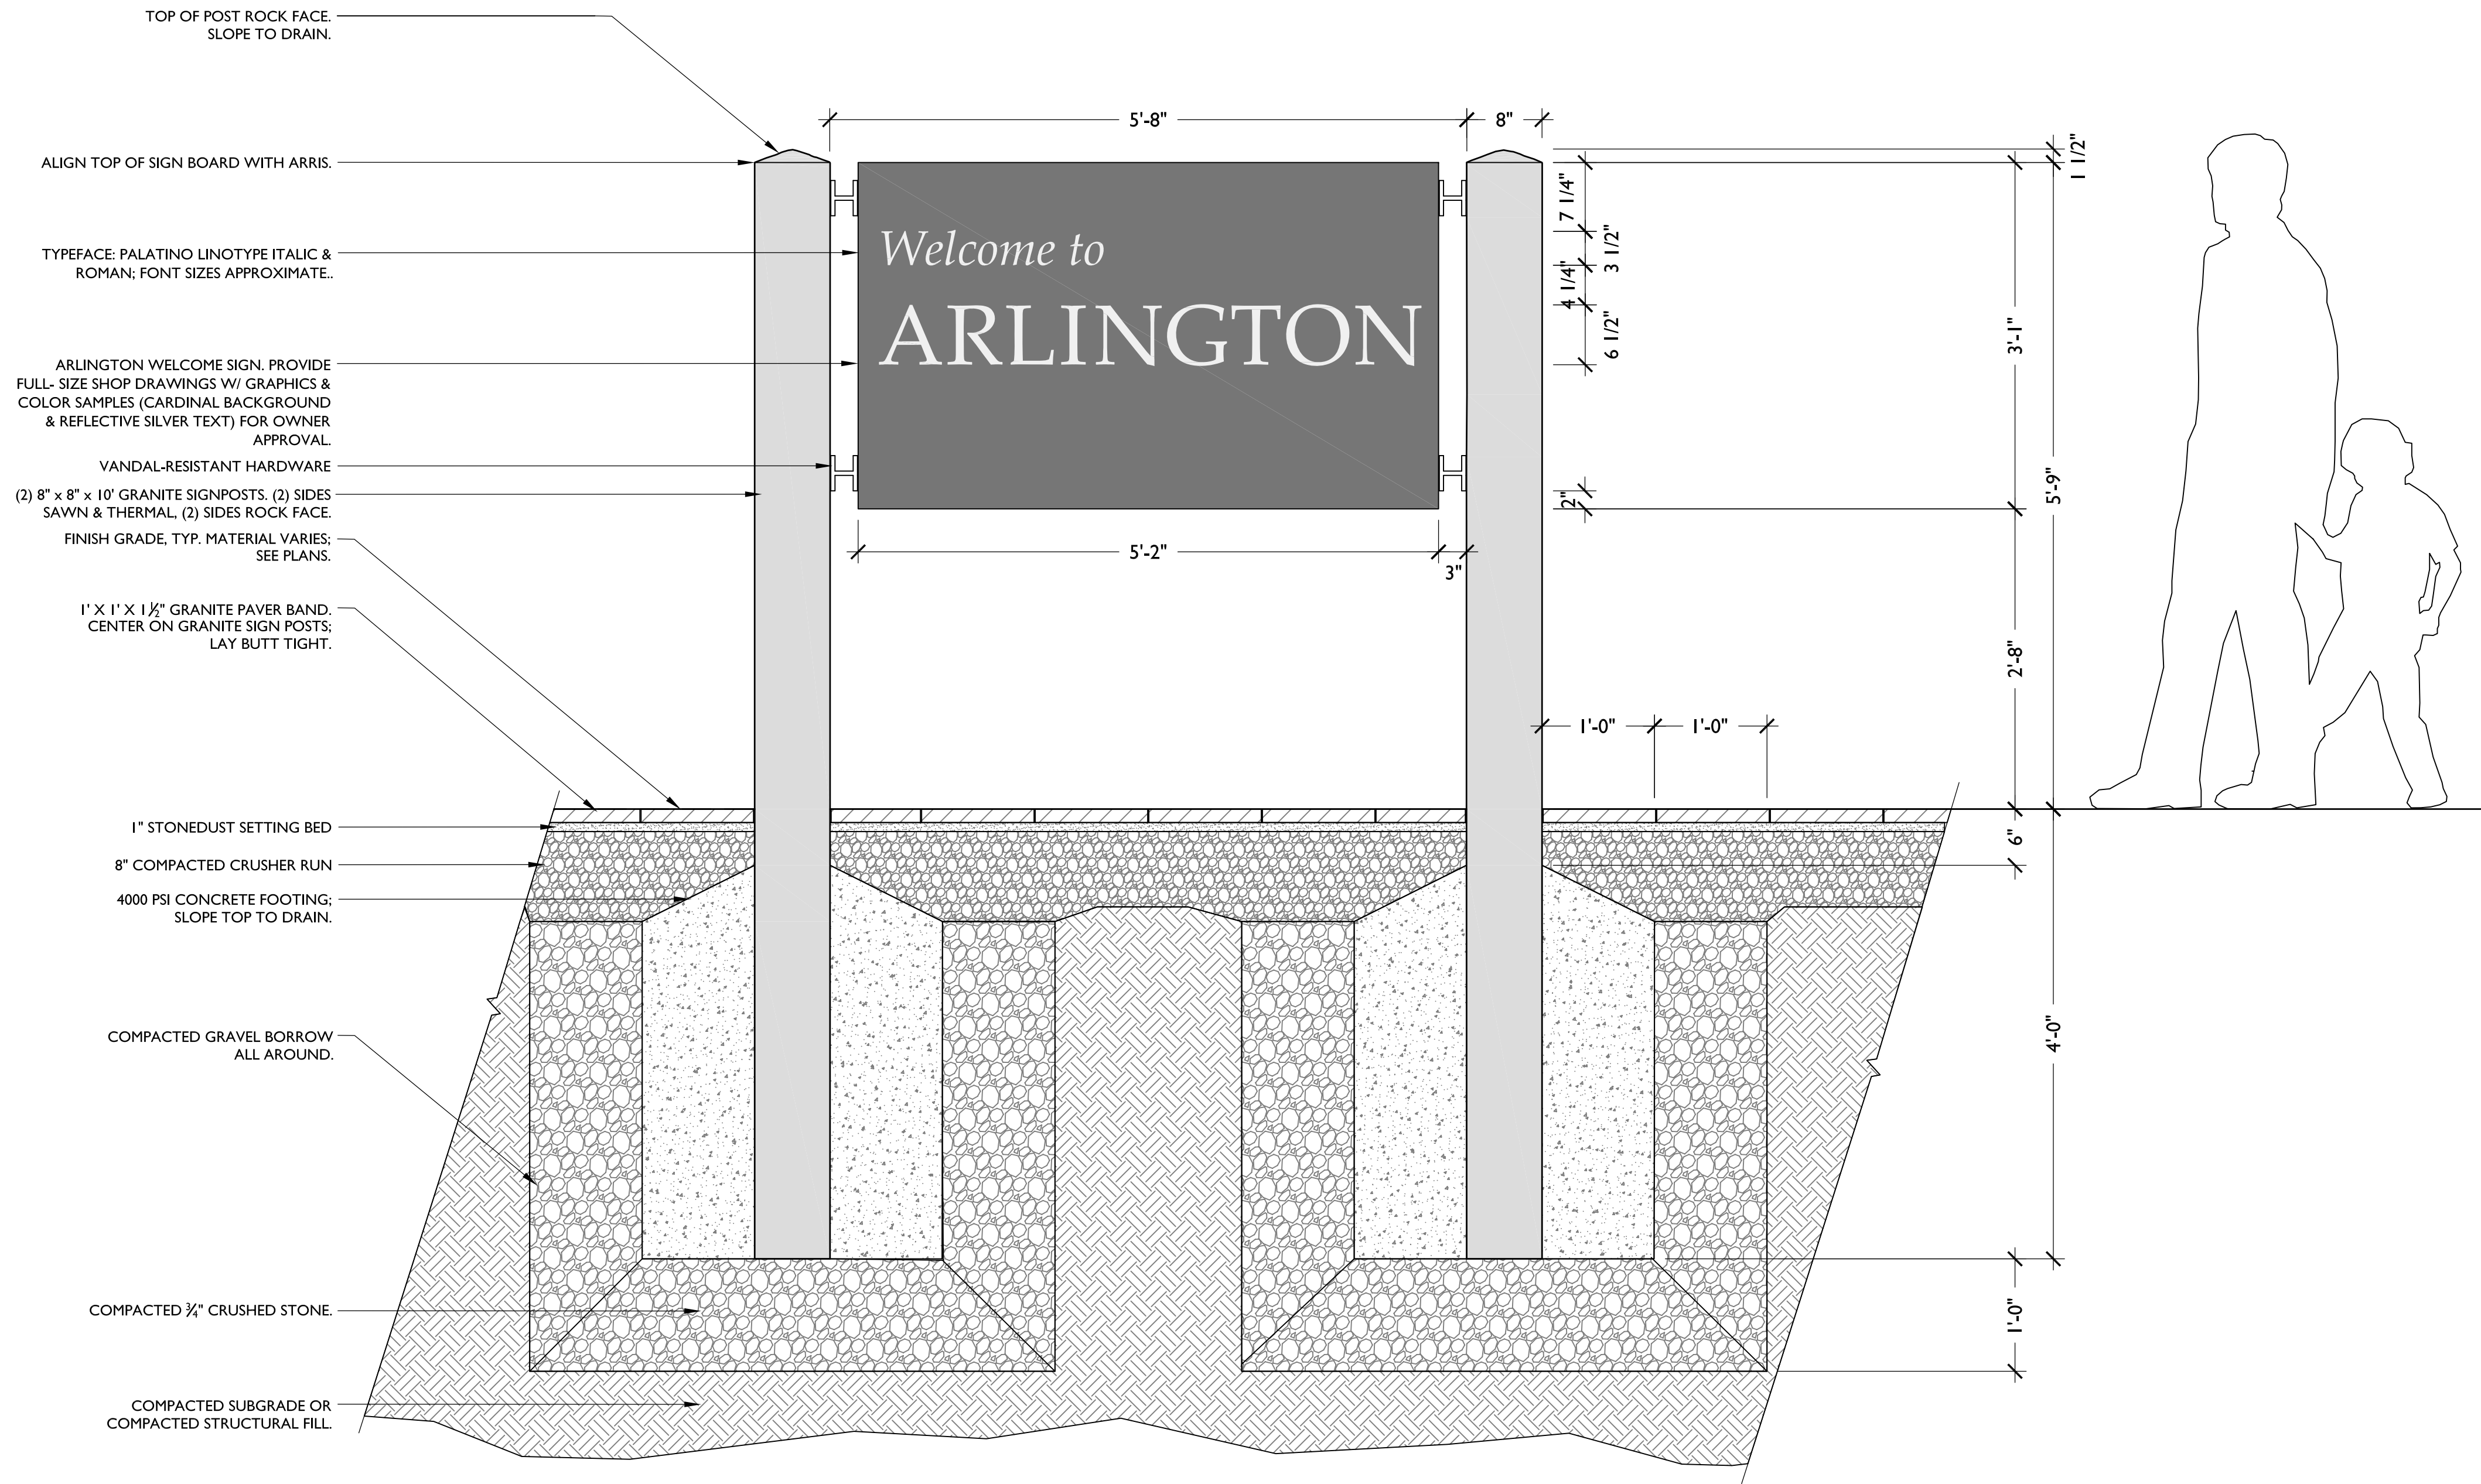

1

ARLINGTON WELCOME SIGN

NOT TO SCALE

ARLINGTON GATEWAYS SITE DETAILS


ESKER COMPANY LANDSCAPE ARCHITECTURE LLC
23 Ridge Road Lexington, MA 02420 781.454.7044

PROJECT:	DATE:	REVISIONS:	SCALE:	NORTH:
141023	160212		as noted	

- NOTES:
1. OBTAIN APPROVAL FOR SOIL TEST REPORT BEFORE PLACING STOCKPILED OR IMPORTED SOILS.
 2. PRUNE ALL DAMAGED BRANCHES TO THE REQUIREMENTS OF ANSI A300.
 3. TREE SHALL BE PLUMB AFTER SETTLEMENT. CONTRACTOR SHALL ADJUST AS REQUIRED OR AS DIRECTED BY OWNER'S REPRESENTATIVE.
 4. FLOOD ALL SAUCERS TWICE WITHIN 24 HOURS OF PLANTING.

2" BARK MULCH; PULL MULCH BACK 6" FROM TREE TRUNK.


REMOVE ROPE AND COVERING FROM TOP 2/3 OF ROOTBALL PRIOR TO BACKFILLING. SCARIFY EDGES OF BALL. STRAIGHTEN CIRCLING ROOTS INTO TREE PIT. PRUNE ANY GIRDLING ROOTS THAT CANNOT BE STRAIGHTENED.

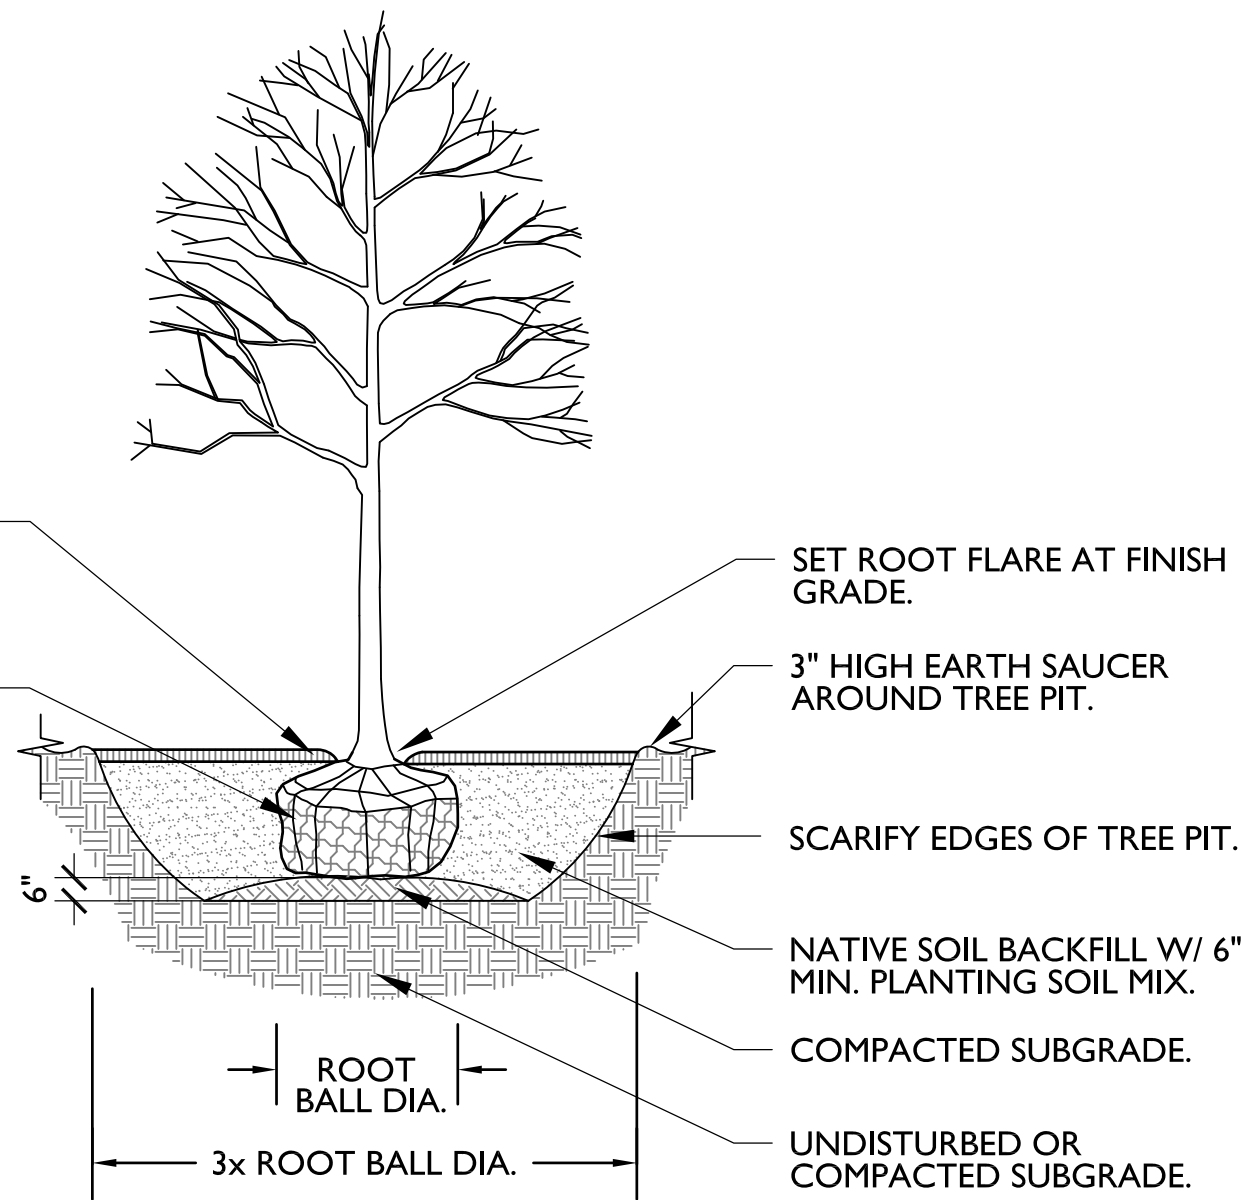

TREE PLANTING

NOT TO SCALE


- NOTES:
1. SPACING VARIES. OBTAIN LAYOUT APPROVAL FROM OWNER'S REPRESENTATIVE BEFORE INSTALLATION.

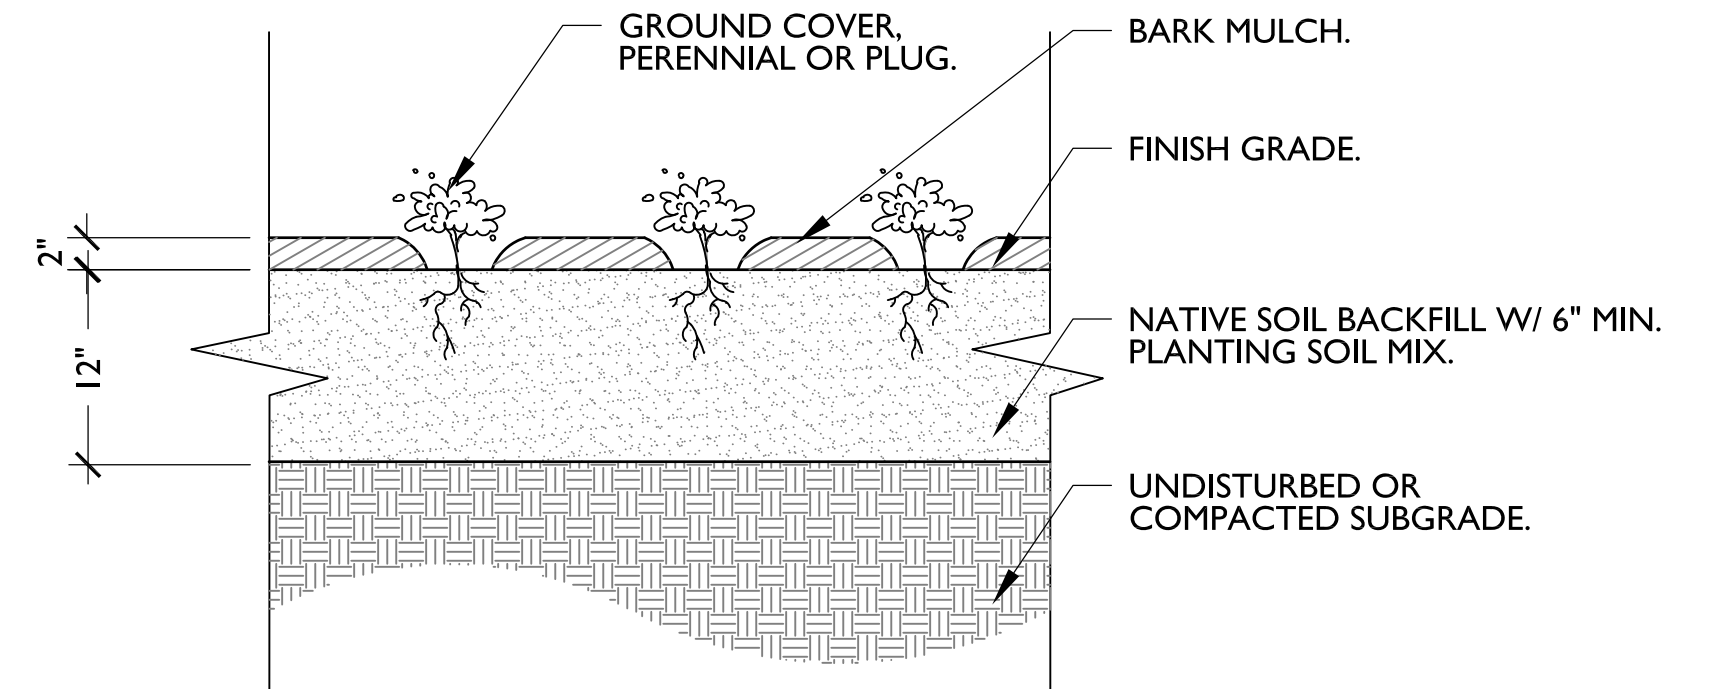

GROUND COVER, PERENNIAL & PLUG PLANTING

NOT TO SCALE

- NOTES:
1. SPACING VARIES. OBTAIN LAYOUT APPROVAL FROM OWNER'S REPRESENTATIVE BEFORE INSTALLATION.

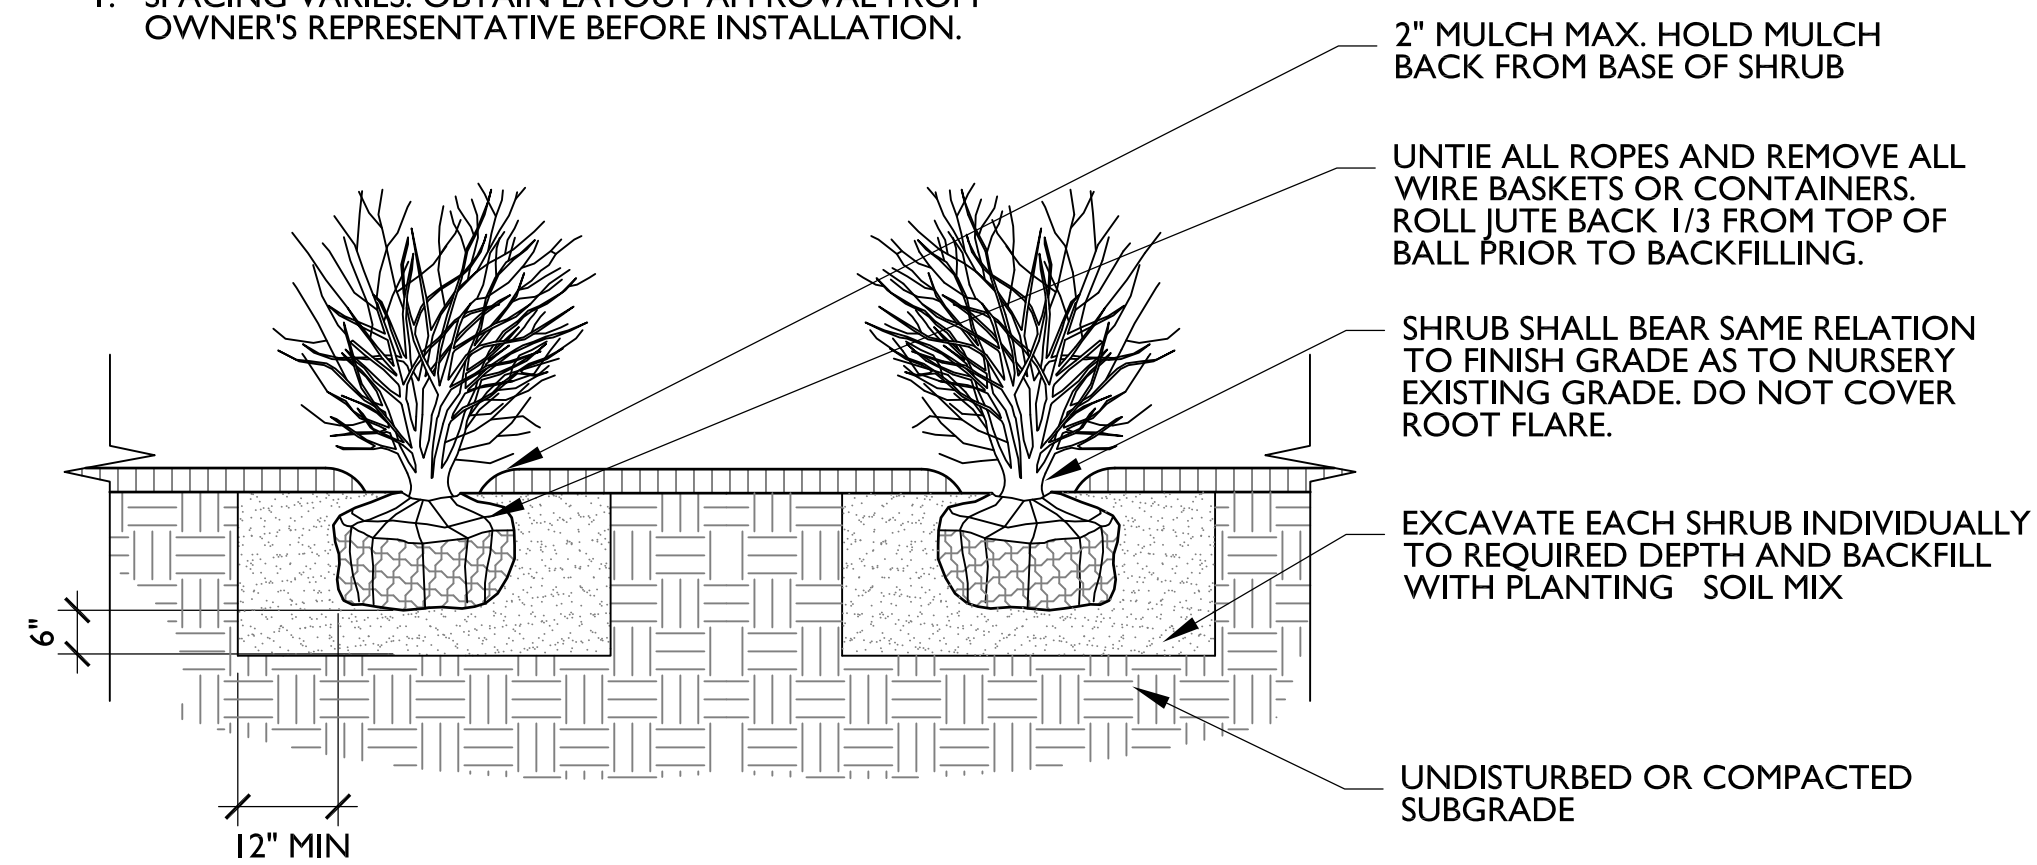

SHRUB PLANTING

NOT TO SCALE

GATEWAY LOCATION MAP

